


FCI P/N	L/mm
10129479-P0006YYLF	60

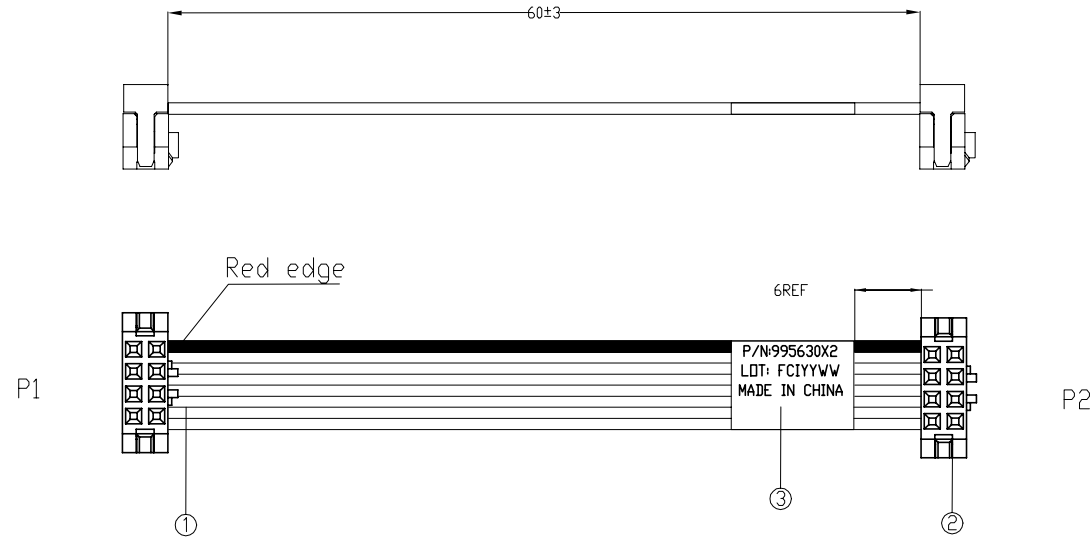

NOTES:

1. TEST:

□/S:100% TEST.
 CONNECTION RESISTANCE: 3 OHM MAX.
 HI-POT:300V/10mS.
 INSULATION RESISTANCE: 10 MOHM MIN.

2. ROHS COMPLIANCE

3. LABEL DETAIL

P/N: 995630X2
 LOT: FFIYYWW
 MADE IN XXXX

Where: XXXX
 FF=Factory symbol
 YY=year
 WW=week

XXXX=Country of origin

Font type: Arial or Univers 57 Condensed
 Font size: Human readable (minimum height 1,5 mm)

③	LABEL	LABEL . W=25MM	1	EA
②	IDC CONN.	Minitex 2x4 position IDC receptacle, 0.76um gold, with central key and friction latch bump,	2	EA
①	RIBBON CABLE	UL2651, 28AWGx8C, Pitch1.0, Grey PVC	A/R	M
No.	NAME	DESCRIPTION	QTY	UNIT

spec ref	See Notes		dr	Harry Shi	2014-05-29	projection	MM	size	A3	scale	N/A	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Harry Shi	2014-05-29			ecn no		rel level		
surface	linear	0.X	±	chr	Guo-Feng Jin			2014-05-29	rel level			
		0.XX	± 0.20	appr	Guo-Feng Jin			2014-05-29	rel level			
	angular	0°	±°			product family		Quickie IDC				
					QUICKIE IDC CABLE ASSEMBLY		dwg no 10129479-P0006YYLF		rev A			
			www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 1			

rev	ecn no	dr	date
A		Harry	2014-05-29



Copyright FCI.