


Datasheet revision 1.0

www.Proto-Advantage.com

QSOP-24 to DIP-24 SMT Adapter (0.635 mm / 25 mil pitch)

| DIMENSIONS | | | | | | |
|------------|------|-------|------|--------|-------|------|
| REF. | mm | | | inches | | |
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| Α | | 3.80 | | | | |
| В | | 2.10 | | | | |
| С | | 0.40 | | | | |
| D | | 0.235 | | | | |
| Е | | 0.635 | | | | |
| F | | | | | 0.300 | |
| G | | | | | 0.100 | |
| Н | | | | | 0.025 | |


Top View (SMT Footprint)

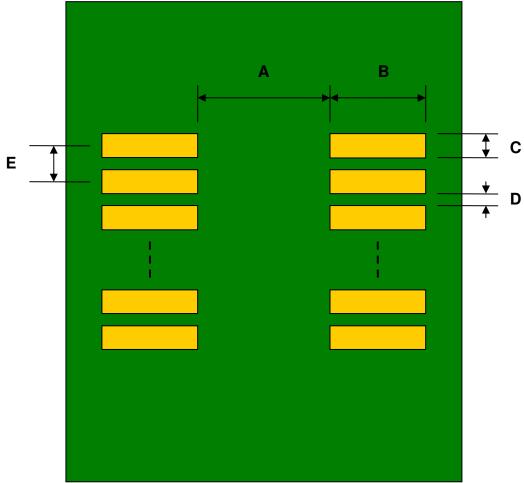

(Representative drawing only - not to scale)




Bottom View (DIP Pins)

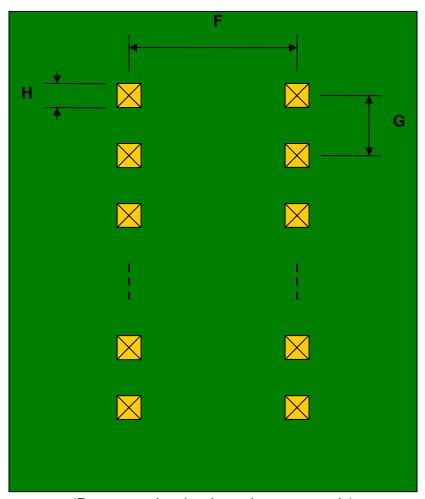

(Representative drawing only - not to scale)

Side View (DIP Pins)

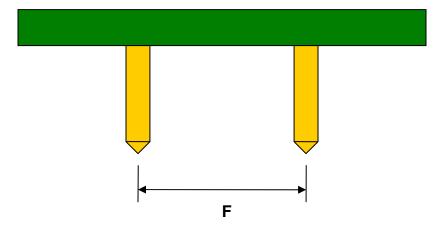

(Representative drawing only - not to scale)

