

**Ratings**

Voltage: 300 V  
 Temperature: -25 to 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 6  
 Gauge: 18 AWG 0.82 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16$  mm x 41  
 Resistance at 20 °C: 23.2  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: red, black, white, yellow, blue, green  
 Diameter:  $\varnothing 1.8 \pm 0.10$  mm  
 Nominal thickness: 0.29 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min



**Outer jacket**

Material: PVC  
 Color: white  
 Diameter:  $\varnothing 7.1 \pm 0.30$  mm  
 Nominal thickness: 0.85 mm

**Wire marking:** E339579 UL AWM STYLE 2464 18 AWG 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

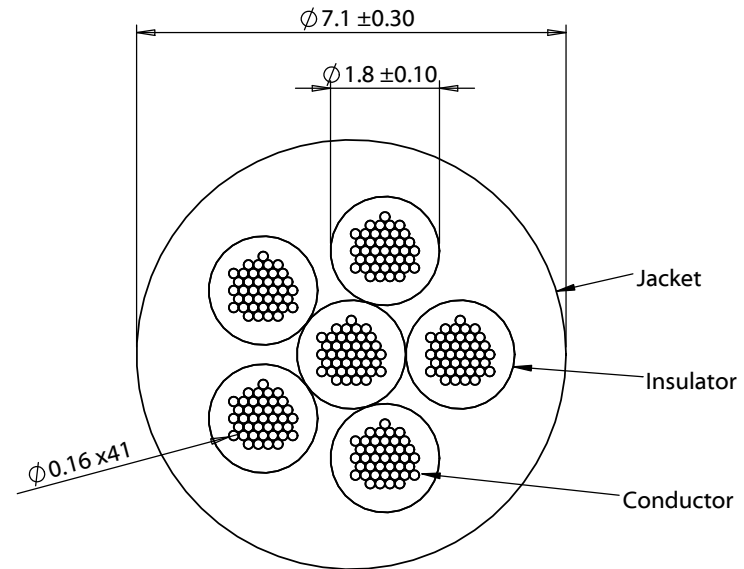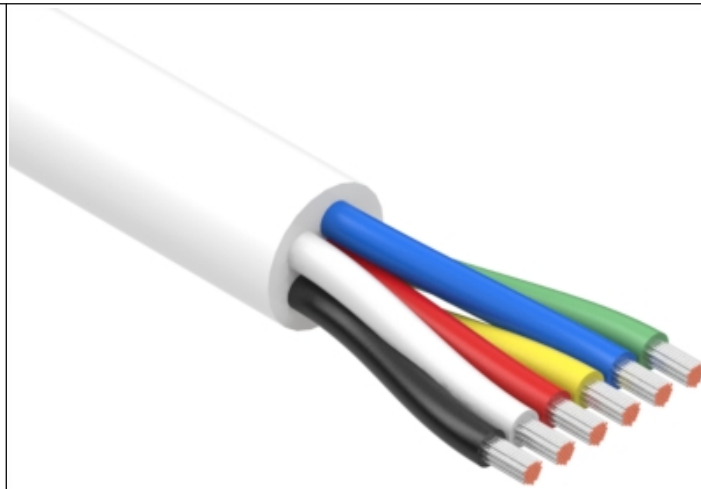

Revision:	Date:	Description:
A	5/15/2019	Initial release

Prepared:  
**AW**  
Digitally signed by AW  
 Date: 2019.05.17  
 09:37:26 -07'00'

Verified:  
**JP**  
Digitally signed by JP  
 Date: 2019.05.17  
 09:54:36 -07'00'

Dimensions are in millimeters.  
 Tolerances:  
 X:  $\pm 0.5$  mm  
 X.X:  $\pm 0.3$  mm  
 X.XX:  $\pm 0.05$  mm

Notes:  
 RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:  
 Wire, 6C TS, 18 AWG, UL2464, 300V, 80C, 7.1 mm, VW-1, PVC, 60P, white

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
 fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-01287
Scale: 8:1	Sheet 1 of 1