
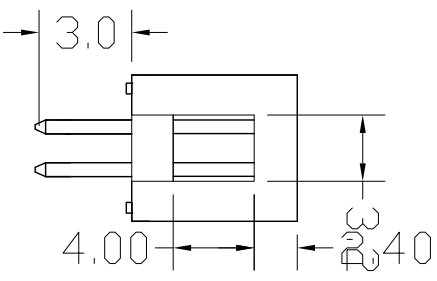
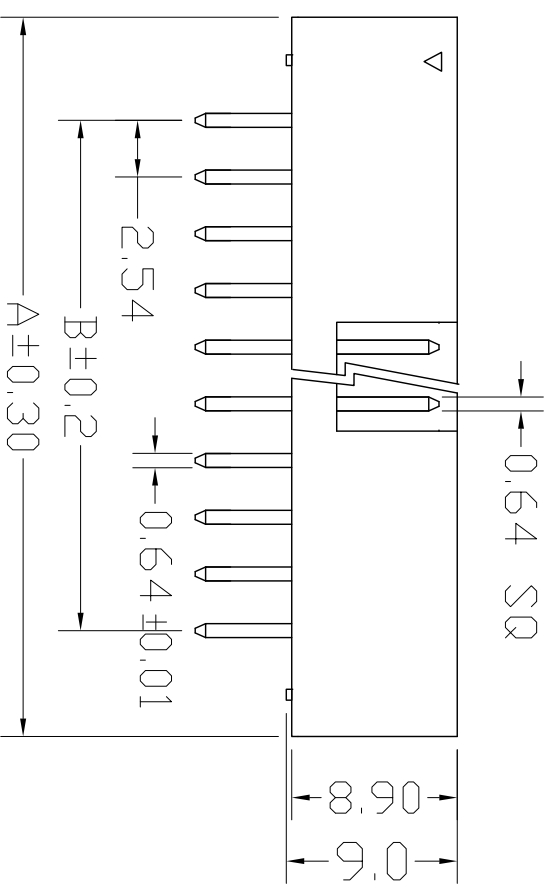



| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | RELEASE | 2012.11.12 |

NOTES:
 Insulator Material: Nylon-6T, UL 94V-0
 Contact Plating: TIN, 80-100µ”
 Contact Material: Brass

Current Rating : 1A AC,DC
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -40°C~+105°C

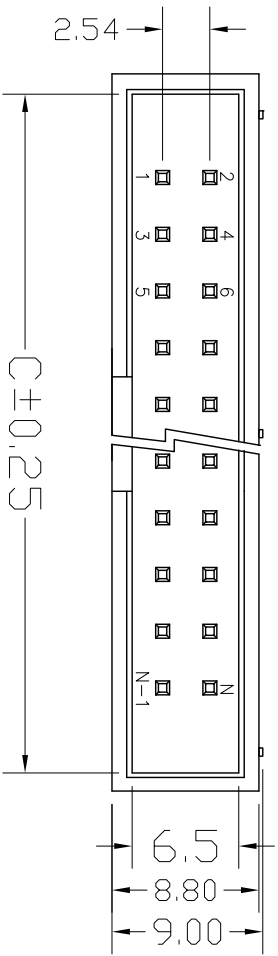

| NUMBER OF POSITIONS | DIMENSIONS | | |
|---------------------|------------|-------|-------|
| | A | B | C |
| 06 | 15.24 | 5.08 | 12.94 |
| 08 | 17.78 | 7.62 | 15.48 |
| 10 | 20.32 | 10.16 | 18.02 |
| 12 | 22.86 | 12.70 | 20.56 |
| 14 | 25.40 | 15.24 | 23.10 |
| 16 | 27.94 | 17.78 | 25.64 |
| 18 | 30.48 | 20.32 | 28.18 |
| 20 | 33.02 | 22.86 | 30.72 |
| 22 | 35.56 | 25.40 | 33.26 |
| 24 | 38.10 | 27.94 | 35.80 |
| 26 | 40.64 | 30.48 | 38.34 |
| 28 | 43.18 | 33.02 | 40.88 |
| 30 | 45.72 | 35.56 | 43.42 |
| 32 | 48.26 | 38.10 | 45.96 |
| 34 | 50.80 | 40.64 | 48.50 |
| 36 | 53.34 | 43.18 | 51.04 |
| 40 | 58.42 | 48.26 | 56.12 |
| 44 | 63.50 | 53.34 | 61.20 |
| 50 | 71.12 | 60.96 | 68.82 |
| 60 | 83.82 | 73.66 | 81.52 |
| 64 | 88.90 | 78.74 | 86.60 |

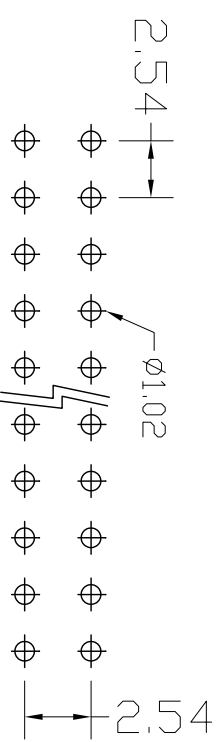

PCB LAYOUT

UNLESS TOLERANCE

| GENERAL | ANGLE | DRAW BY |
|-------------|-------------|------------|
| X ± 0.30 | X° ± 3.0° | |
| .X ± 0.20 | .X° ± 2.0° | DESIGN BY |
| .XX ± 0.15 | .XX° ± 1.0° | CHECK BY |
| .XXX ± 0.08 | .XXX ± 0.5° | APPROVE BY |

SCALE: 1:1 SHEET: 1/1 UNIT: MM

Port NO.: 3020-XX-0100-99

Cnc Tech,LLC

DRAW NO.: REV: A