

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: VW-1



**Conductor**

Conductor count: 1  
 Gauge: 26 AWG 0.13 mm<sup>2</sup>  
 Material: tinned copper  
 Strand size:  $\varnothing$ 0.404 mm (solid)  
 Resistance at 20 °C: 143  $\Omega$  /km max

**Insulator**

Material: Polyphenylene Ether, Modified (mPPE)  
 Color: yellow  
 Diameter:  $\varnothing$ 1  $\pm$ 0.08 mm  
 Nominal thickness: 0.28 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Wire marking:** E339579 UL AWM STYLE 11028 26 AWG 105°C  
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

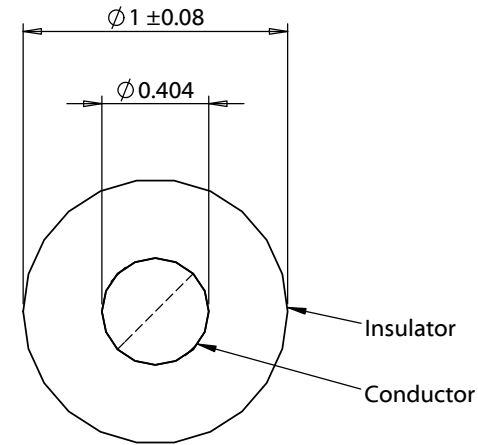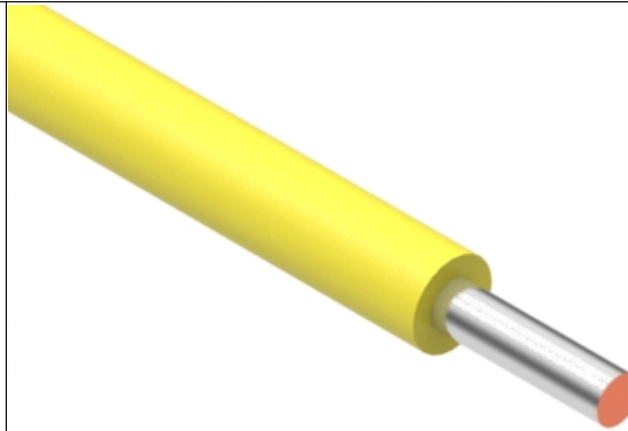

|           |          |                 |  |  |   |
|-----------|----------|-----------------|--|--|---|
| Revision: | Date:    | Description:    | Prepared:  | Notes:   | <b>TENSILITY</b><br>tel 1.541.323.3228 800 877.670.7118<br>fax 1.541.323.4202 web tensility.com |
| A         | 6/3/2021 | Initial release | AW<br><small>Digitally signed by AW<br/>Date: 2021.06.03<br/>12:26:25 -07'00'</small>                        | RoHS compliant   |   |
|           |          |                 | Verified:  | Phthalate and halogen free   | Size: Part number:<br>A 30-02105  |
|           |          |                 | JC<br><small>Digitally signed by JC<br/>Date: 2021.06.07<br/>09:07:47 -07'00'</small>                        | Description:   |   |
|           |          |                 | Dimensions are in millimeters.<br>Tolerances:<br>X: $\pm$ 0.5 mm<br>X.X: $\pm$ 0.3 mm<br>X.XX: $\pm$ 0.05 mm | Wire, hook-up, tinned solid core, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE, yellow | Scale: 35:1   |
|           |          |                 |  |  | Sheet 1 of 1  |

5

4

3

2

1