

- Low-cost relay for electric appliances
- PCB + Quick Connect Terminals
- Withstands surges of 10,000 V for 1 minute
- TV 8 available



Ordering Information _____

To Order: Select the part number and add the desired coil voltage rating, (e.g., G5J-1-TP-M-DC12).




Specifications _____


■ CONTACT DATA



■ COIL DATA




■ CHARACTERISTICS




Note: Data shown are of initial value.

■ CHARACTERISTIC DATA

Maximum switching capacity

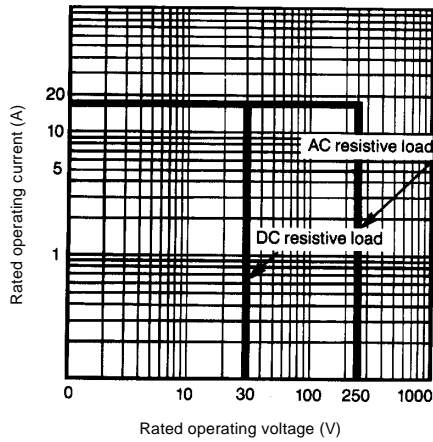


Electrical service life

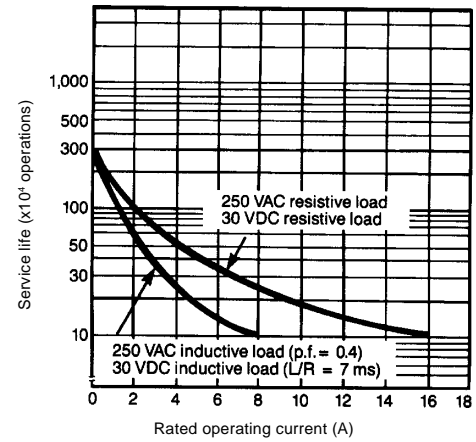


Dimensions

Unit: mm (inch)


■ RELAYS

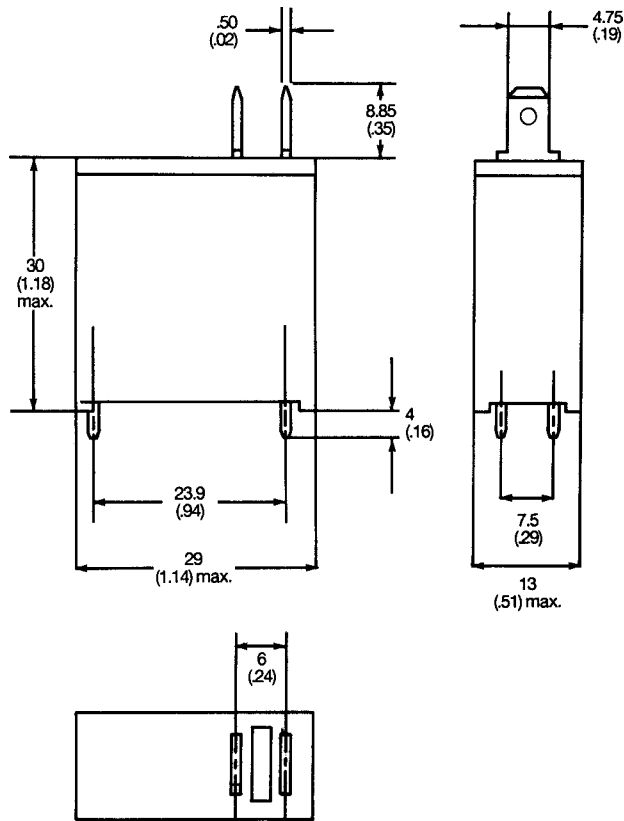

Terminal arrangement/ Internal connections



Mounting holes (Bottom view)

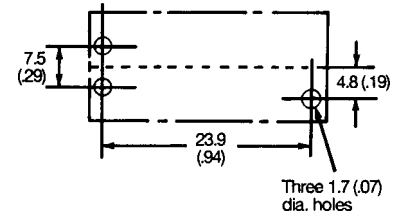

■ APPROVALS

UL (File No. E41643)/CSA (File No. LR31928)



- Note: 1. The rated values approved by each of the safety standards (e.g., UL and CSA) may be different from the performance characteristics individually defined in this catalog.
2. In the interest of product improvement, specifications are subject to change.

OMRON

OMRON ELECTRONICS, INC.

One East Commerce Drive
Schaumburg, IL 60173
1-800-55-OMRON

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8
416-286-6465