



THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PROP WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

## ACTUAL SIZE:



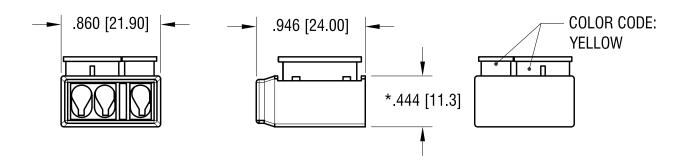

## NOTE:

- 1. 3 PIN ONE WAY SERIES
- 2. INSULATION: MAT'L- POLYCARBONATE, LEXAN UL 94V-0
- 3. CONTACT: MAT'L- COPPER ALLOY

FINISH- TIN PLATE, OVER NICKEL PLATE

4. FOR WIRE: SOLID WIRE

WIRE SIZE: 16 AWG MIN. - 14 AWG MAX

5. RATED VOLTAGE 300V RATED CURRENT: 20 A

## \* HEIGHT OF CLOSED CONNECTOR

## KEYSTONE ELECTRONICS CORP. www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 PART NAME ONE WAY SERIES WIRE CONNECTOR MATERIAL AS NOTED DRN BY FINISH DATE 1.06.17 **AS NOTED** APP'D SCALE RH PARTS ARE NO LONER UL LISTED 1.2X CHANGE AS PER ECN 22-158 10.13.22 Α TOLERANCES INCH [MM] CODE DWG NO. $\pm .010 [\pm 0.25]$ DECIMAL 8371 C ANGULAR ± 1° DATE **DESCRIPTION** REV. UNLESS OTHERWISE SPECIFIED