


General information

| | |
|-------------------|---------------------|
| Part number | G82YAR-P04UP00-000L |
| Termination | pcb |
| Size | 2 |
| Locking principle | break , push |
| Coding | a_key_amc |
| Cable Diameter | cable_amc_2 |

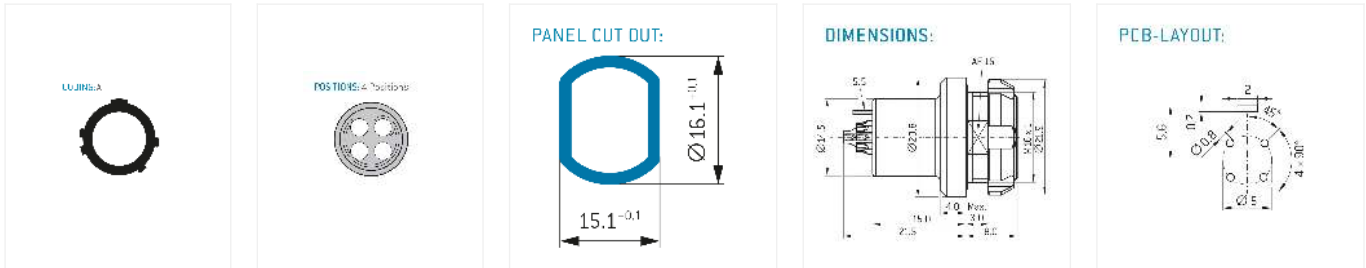

Contact insert description

| | |
|----------------------|--------------|
| Number of contacts | 4 |
| Contact type | sockets |
| Contact diameter | 13mm |
| Insulator material | peek |
| Termination | pcb |
| Termination diameter | 07mm |
| Data transmission | ethernet_100 |

reverse_gender_on_request

Technical information

| | | |
|--------------------------------|-----------|---------------|
| Nominal current single contact | 07_a | iec_60512_5_2 |
| Nominal current insert | 7 A | vde_0298_4 |
| Test voltage | 195_kv_ac | eia_364_20f |

safety_text

Mechanical and environmental data

| | |
|-----------------------|--------------|
| Degree of protection* | ipsk8_ip6k9k |
| Operating temperature | 51_125_c |
| Mating cycles | 5000 |

mated

Material and surface treatments

| | |
|----------------|---------------|
| Housing | ruthenium |
| Contact | cu_alloy_gold |

data_text

safety_text_2

data_text

ul_text

illustrative_text