


1. Wiring Diagram.

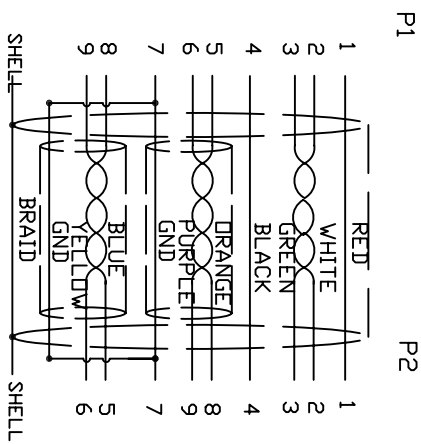

P1
P2

2. Cable test condition :
 Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

| | | | | |
|-----|----------|--|-----|----------|
| 5 | CONN | USB3.0 A MALE G/F BLUE | 1 | P2 |
| 4 | PVC | 45P PVC BLACK OVERMOLD | 25g | |
| 3 | PE | LLDPE 500026 6201 | 16g | |
| 2 | CONN | USB3.0 A/M G/F BLUE | 1 | P1 |
| 1 | CABLE | 《28AWG (7/0.12TC) *IP+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *IP+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) ODS.5 BLACK | 1 | 2000mm |
| NO. | PART NO. | DESCRIPTION | QTY | UNIT/REF |
| | | BILL OF MATERIAL | | |

| | | |
|----------------|--------------------------------|---------------|
| A | INITIAL RELEASE | 2014/08/28 |
| REVECN# | DESCRIPTION | DATE |
| | P/N: 103-1020-BL-00200 | REV A |
| | TITLE: CABLE USB3.0 A/M TO A/M | |
| DRAWN: WENC | DATE: 08/24/14 | CUSTOMER P/N: |
| CHECKED: EDWIN | DATE: 08/24/14 | CUSTOMER: |
| APPROVAL: | | SHEET 1 OF 1 |
| | | REV A |