


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
AC1		REVISED PER ECO-14-008433	05JUN2014	NK	MZ
AD		REVISED PER ECO-17-000037	10MAR2017	RS	MZ

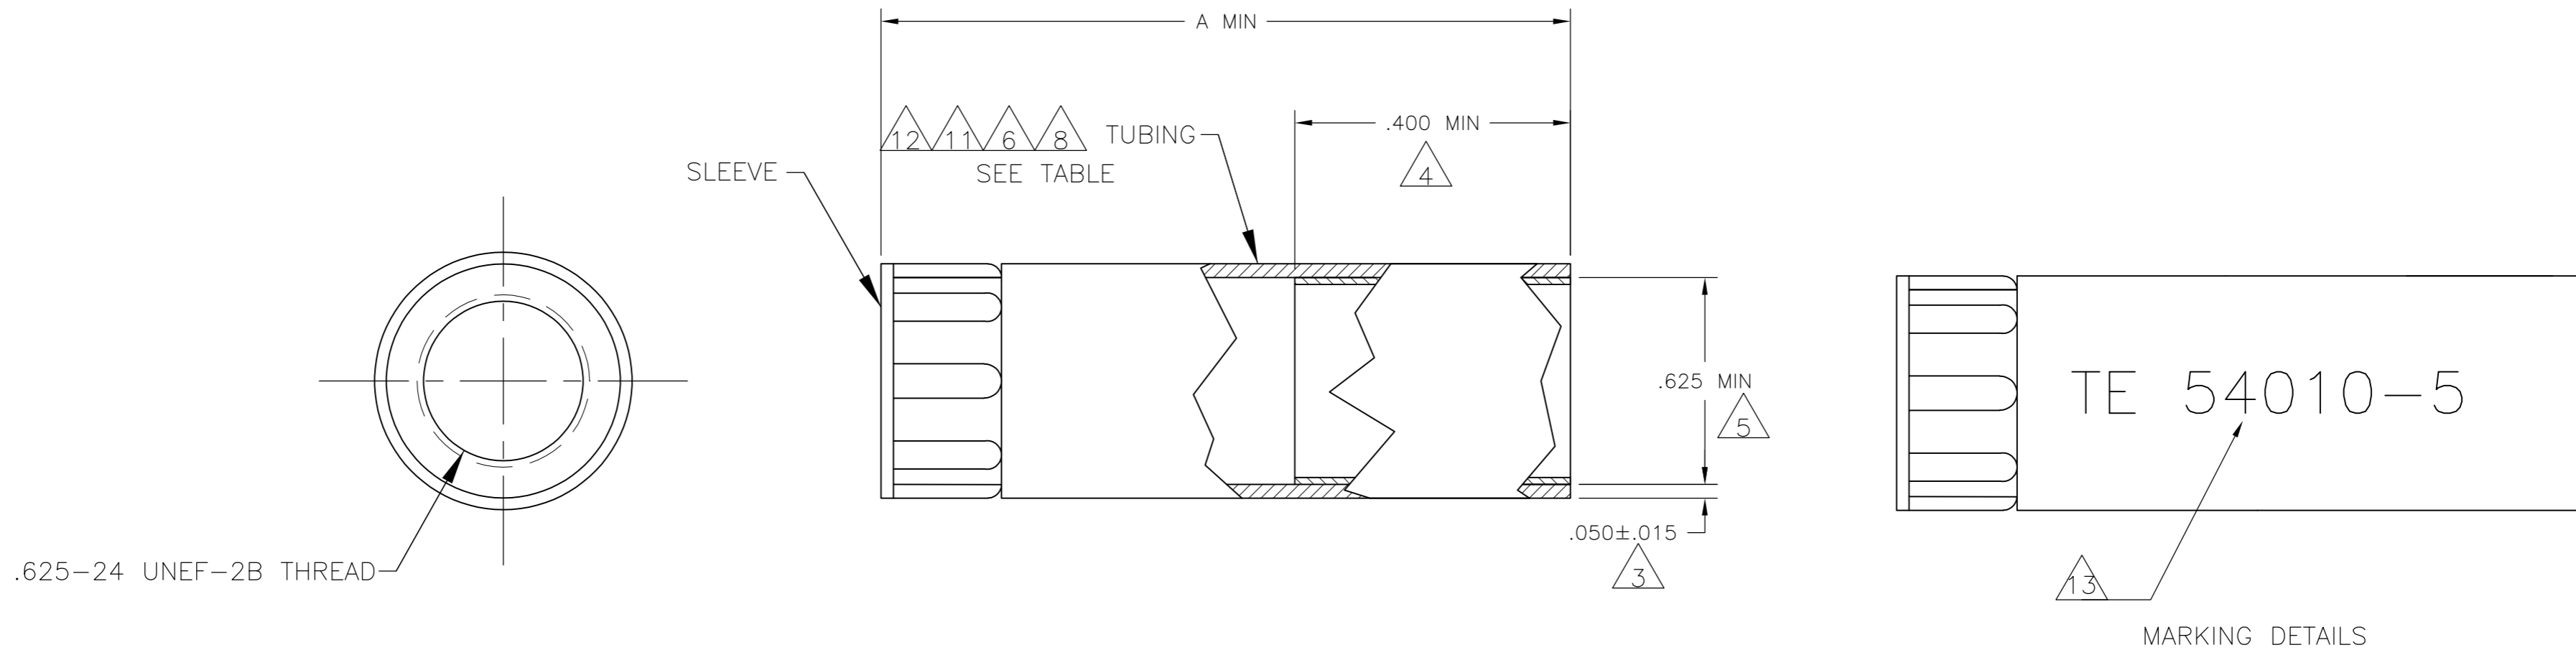

- 1 POLYOLEFIN, BLACK.
- 2 NYLON, BLACK.
- 3 NOMINAL WALL THICKNESS, EXPANDED.
- 4 LENGTH OF SEALANT.
- 5 EXPANDED INSIDE DIAMETER.
- 6 6.35[.250] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7 ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8 121°C [250°F] SHRINK TEMPERATURE.
- 9 -55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10 THIS PART WILL ACCOMODATE $\phi 6.35 - \phi 15.24$ [$\phi .250 - \phi .600$] CABLE RANGE.
- 11 4.06 [.160] MAXIMUM RECOVERED INSIDE DIAMETER.
- 12 ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13 SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 14 OBSOLETE PART.

TE 54010-5	6 8	2.25	14 54010-5
NONE	11 8	2.25	54010-4
NONE	6 8	1.25	54010-2
NONE	6 8	2.25	54010-1
MARKING	RECOVERED INSIDE DIS	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN C.REIFSNYDER 09 APR 96		TE Connectivity	
CHK R.STONE 15 APR 95		NAME	
APVD T.A.WETZEL 03 MAY 96		STRAIN RELIEF ASSY, SHELL SIZE 11, CPC	
PRODUCT SPEC		SIZE	CAGE CODE
APPLICATION SPEC	A2	00779	C=54010
WEIGHT	-	SCALE	2:1
CUSTOMER DRAWING	SHEET	1 of 1	REV AD