



8 button membrane SW to OSD Control Board CN2 Pin Assignment	
pin #	description
10	Common Ground
9	Select Up
8	Select Down
7	Adjust Up/Increase/Right
6	Adjust Down/Decrease/Left
5	Menu
4	Brightness Down
3	Brightness Up
2	ON/OFF
1	Common Ground

Membrane interface board P/N 416100120-3 can operate under 12VDC/24VDC power input environment.


PCB OSD Control Board CN1 Pin Assignment	
pin #	description
12	no connection
11	OSD Select UP
10	OSD Select Down
9	OSD Plus/Right
8	OSD Minus/Left
7	OSD Menu
6	Ground
5	Backlight Brightness VR pin B
4	Backlight Brightness VR pin WIP
3	Backlight Brightness VR pin A
2	Power Switch B
1	Power Switch A

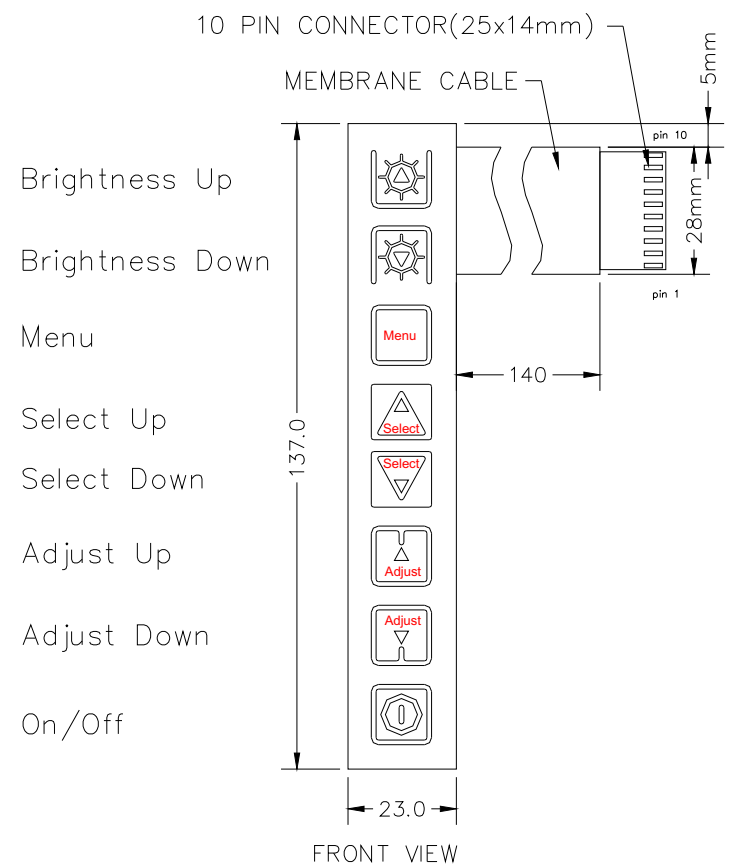

**Membrane Switch:  
P/N:356301021-3**

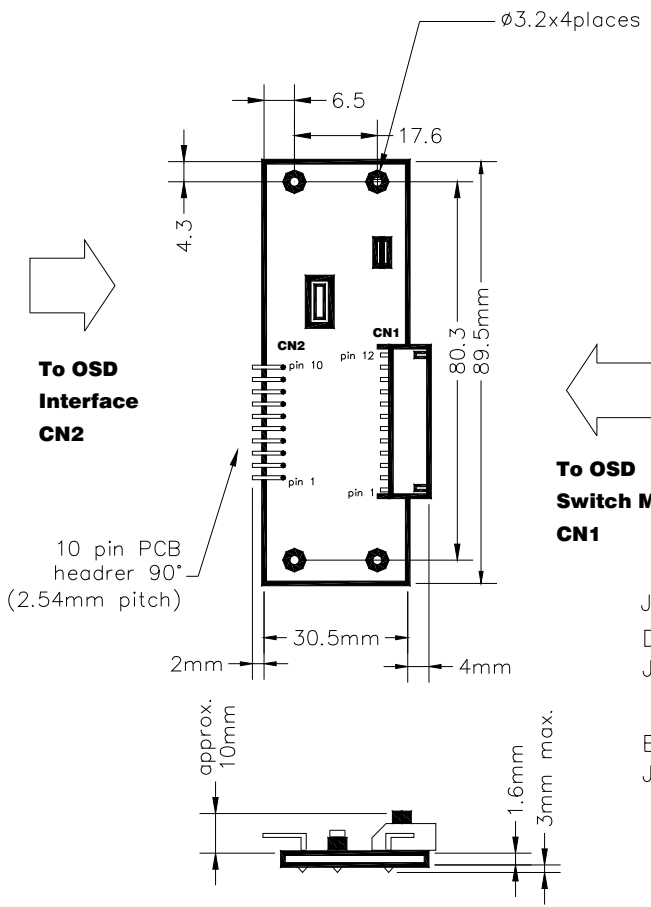

**Membrane Interface Board:  
P/N:416100120-3**

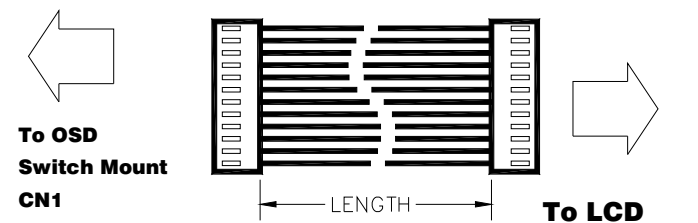

Jumper setting on OSD interface  
**DEFAULT POWER**  
 JP1 : 1-2 closed - OFF  
 2-3 closed - ON  
**BRIGHTNESS INC/DEC SWITCH**  
 JP2 : 1-3 & 2-4 closed - SWAP  
 1-2 & 3-4 closed - NORMAL

**OSD Cable:  
P/N:426120400-3 (12/12WAY), 300mm**



<p><b>Title:</b> KIT 60131-3 OSD KIT</p> <p><b>NOTE:</b> All dimensions are in mm</p>	<p><b>Date:</b> 30 JAN 08</p> <p>Kit 60131-3 OSD KIT</p>
---	--