



Electrical Specifications

Center Frequency: 456.5MHz
Bandwidth: 11 MHz
Passband: 451-462 MHz
Insertion Loss: 1.0 dB Max
VSWR: 1.4:1 Max
Rejection: >60 dB @ 415-425 MHz
Power Handling: 20 W


Mechanical

Connector Type: UHF (F)
Dimensions: 3.61 x 3.61 x 2.92 Inches

Environmental

Operating Temperature: -30 to +75° C
Storage Temperature: -30 to +85° C

Outline Drawing:

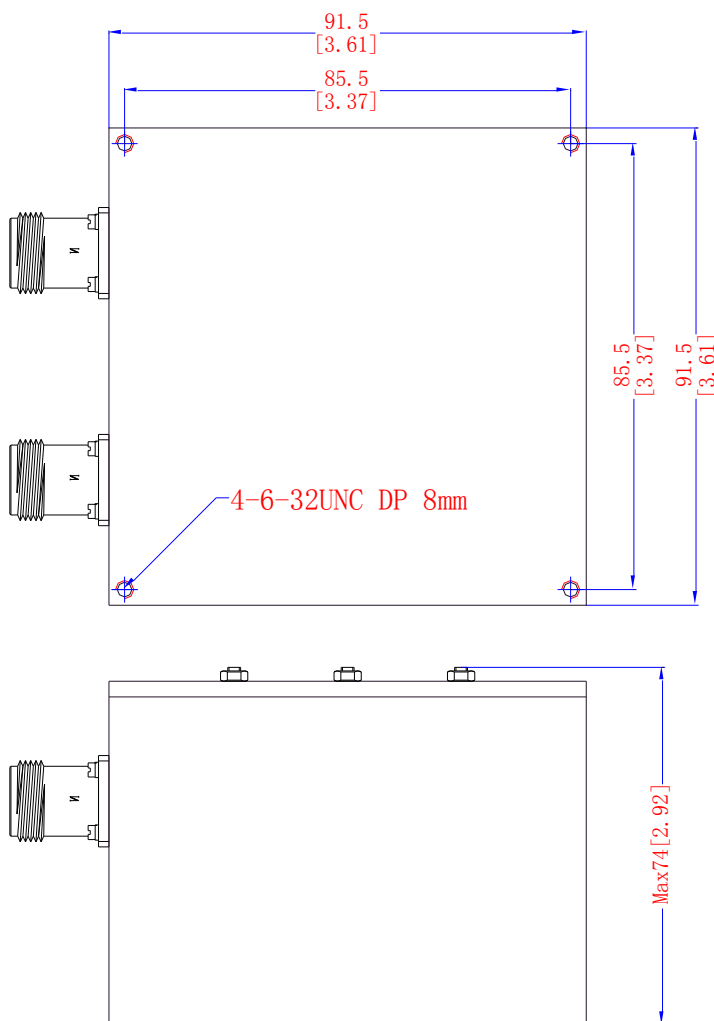



456.5 MHz Cavity Bandpass Filter

Part Number: AE456B11159



Response Plot:

