

Ŧ	G	нт — — — — — — — — — — — — — — — — — — —	m	0



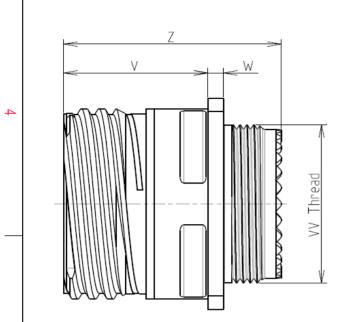

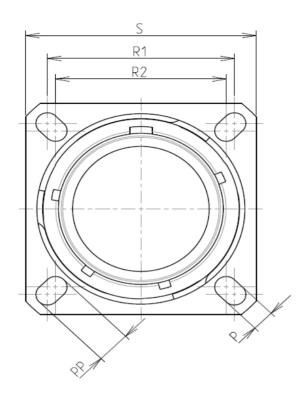

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
N	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	 -65°C to +200°C 			
	-Salt Spray	: 500 hours			

: 32.01 g ± 10%

8D 0

G

11

S

98

S

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 11-98

CONTACT TYPE : SOCKET(500 Matings)

Е



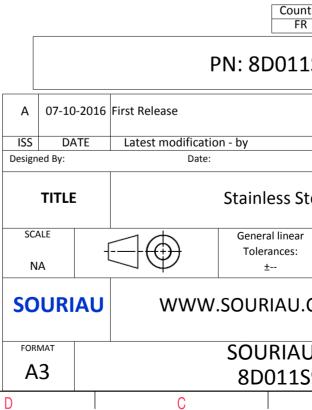

	Φ		A		
	R				4
S EXA	AMPLE				3
s which er of t indation untry R	non-conformit ch does not co he Parties or b on, technical no Jurisd	mply with by a third part			2
		CUSTOME	RDRAWING	MOD N°	
Stee	el Recepta	cle 8D se	ries		
ar			PROJECT 59		1
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 8SN-C			SHEET 1/2	
	B		A		J

		۵	٣	m	D	0	
		Contact Layout					Panel Cutout
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ $			Å	SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	
	Com posit ID A B C C D E F Sheli Arrangement Numb	Mon (mm) X-axis (mm) Y-axis (mm) +.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.77) 130 (3.30) +.000 (0.00) +.000 (0.00) +.000 (0.00)	1		∑ ∑		
	Shell Arrangement Numb size no. conta 11 -98 6	cts contacts rating location					Dim
ω							ØA ØAA R1 ØT
						the Specifications is	the Products whi
N							Country FR
						PN	N: 8D011S
					A 07-10-20 ISS DATE	16 First Release	by
					Designed By:	Date:	- Dy
					TITLE	S	tainless Ste
_					SCALE NA	$\bigcirc \bigcirc$	General linear Tolerances: ±
					SOURIA	J WWW.S	OURIAU.C
					FORMAT A3		SOURIAU 8D011S9
	Н	G	F	E	D	С	

