

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		07/12-18	Initial release	Chen Bo



THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ③ Terminal(housing):Thermoplastic (UL94 V-0)
- Item ④ Contact pin: Brass,Bright Tin plated over Nickel plated

Electrical:

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▲

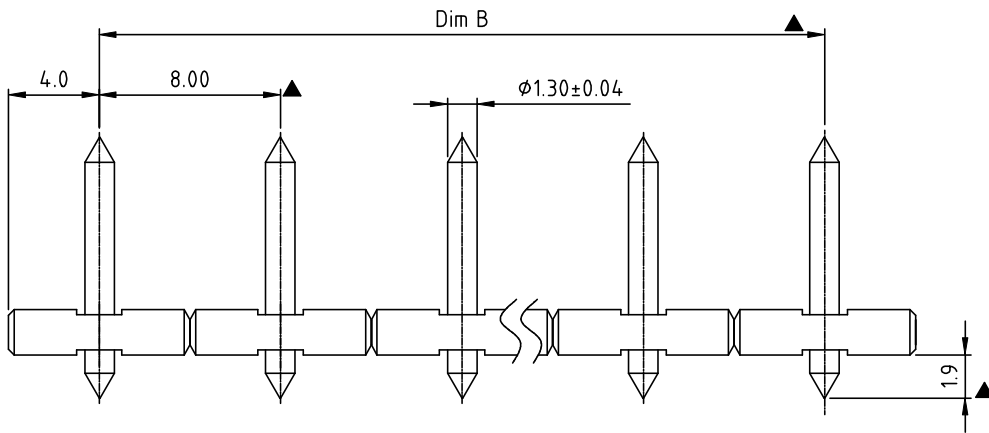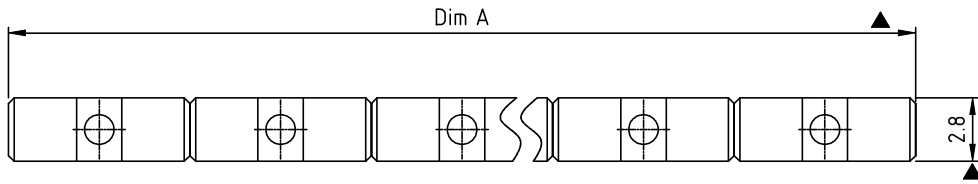


OP xx 6 3 x x xxxx G

POLES

- 02 2pole
- 02 3pole
- ... ..
- 12 12pole

G RoHS compliant (lead<4%) In copper Alloy  
0000: Standard Any special item by customer request. please contact sales department.

0 Bright Tin plated over Nickel plated

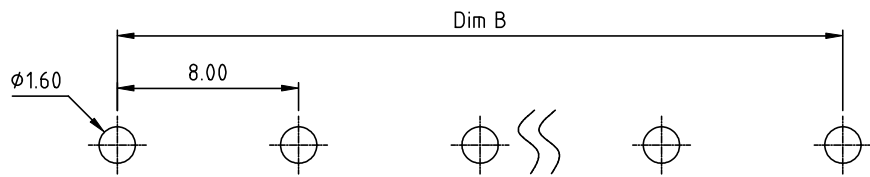

P.C.B. LAYOUT

DIMENSION

Dim A	N×8.0
Dim B	(N-1)×8.0

N = Number of poles

Poles	Tolerance
2P-4P	±0.15
5P-7P	±0.20
8P-10P	±0.30
11P-12P	±0.40

**Amphenol**  
**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OP-8.0mm series			
PART NO.		OPxx63xxxxxG		DWG NO.	80P0301
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 07/12-18	Chen Bo 07/12-18		
				Tolerance	
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: B	X° ±1°