

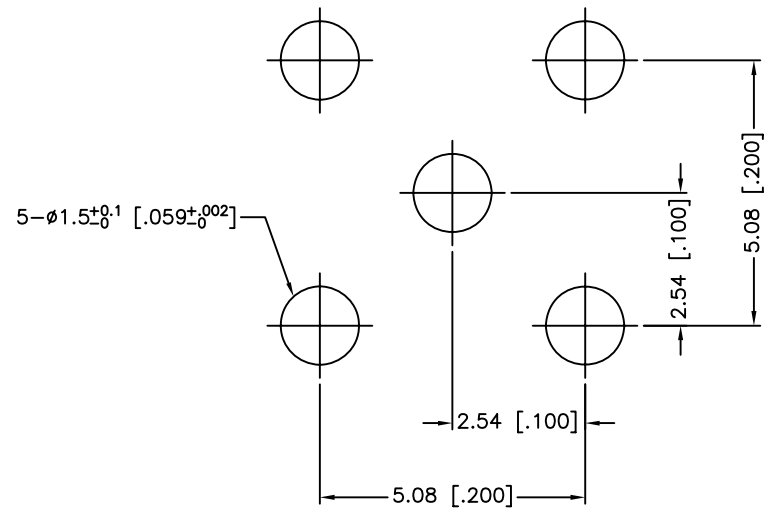


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/17/09	XXXXXX	INITIAL RELEASE

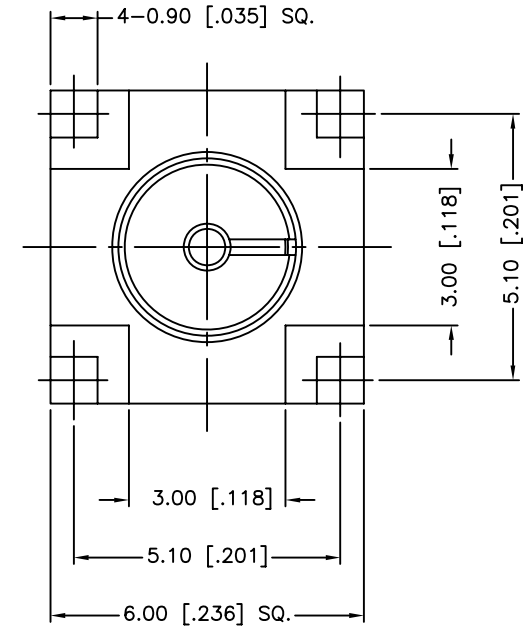

RECOMMENDED
MOUNTING HOLE

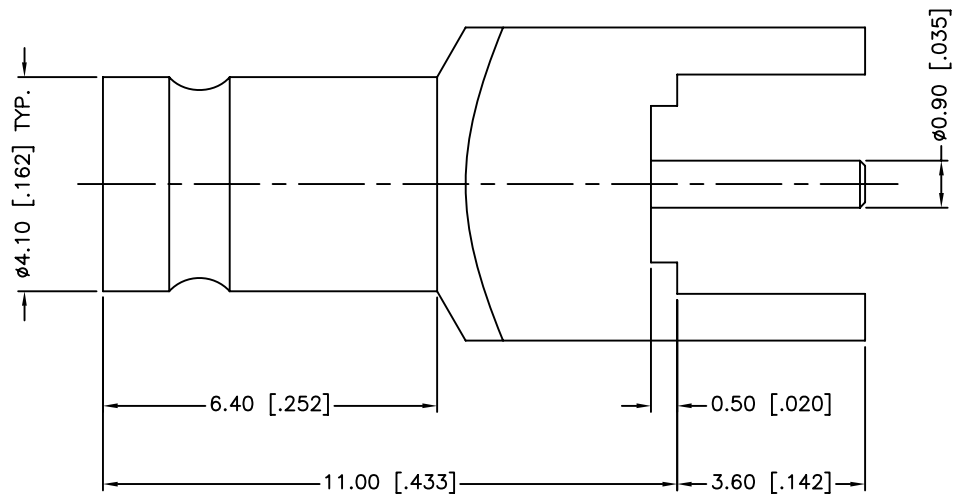

VSWR (RETURN LOSS): 1.15 MAX. @ 0-3 GHz

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20 mm
8 - 30mm ± 0.40 mm
30 - 120mm ± 0.50 mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007 "
.315 - 1.180 = ± 0.015 "
1.180 - 4.724 = ± 0.020 "

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	M.ZHANG	07/17/09
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/282127-75.DWG	

Amphenol Connex			
PART DESCRIPTION 1.0/2.3 JACK PCB MOUNT (FOR 75 OHM)			
PART NO. 282127-75			
DWG. NO.	282127-75.DWG	REV.	NC
SIZE	A	SCALE	NA

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	BODY
1	NATURAL	PTFE	INSULATOR
1	GOLD	BER. COPPER	CONTACT PIN