

Housing - HC-B 10-TFQ-N-O1STM25S - 1460067

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

HEAVYCON B10 sleeve housing, for double locking latch, height: 56 mm, with 1 x M25 thread, lateral cable outlet



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 1 |
| Weight per Piece (excluding packing) | 124.0 GRM |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------|-------|
| Height | 56 mm |
| Width | 43 mm |
| Length | 73 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Schutzart Gehäuse (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------------------------------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Housing type | Sleeve housings |
| Locking type | For double locking latch |
| No. of cable exits | 1 |
| Cable exit | Lateral |
| Screw connection | None |
| Type of the screw connection | 1x M25 |

Housing - HC-B 10-TFQ-N-O1STM25S - 1460067

Technical data

General

| | |
|--------------------------|---------------------|
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Accessories

Accessories

Full screw connection

Cable gland - HC-K-KV-M25(11-17) - 1690639



Plastic screw connection up to 5 bar, thread length: 8 mm, cable diameter: 11 - 17 mm, WAF 29, screw connection: M25

Housing - HC-B 10-TFQ-N-O1STM25S - 1460067

Accessories

Cable gland - HC-M-KV-M25(11-16) - 1690574



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M25

Cable gland - HC-M-KV-M25(14-21) - 1646007



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25

Cable gland - HC-M-KV-M25(1ASI) - 1584020



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M25

Multiple screw connection

Cable gland - HC-M-KV-M25(1X10/1X11) - 1580228




Special cable screw connection M25, brass nickel-plated, grommet with 10 mm and 11 mm holes

Drawings

Housing - HC-B 10-TFQ-N-O1STM25S - 1460067

Dimensioned drawing

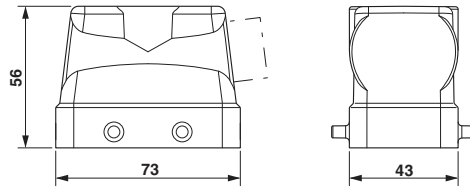

Dimensional drawing