



insulation monitoring relay for non-grounded (IT) networks up to 400 V AC, 15-400 Hz and up to 600 V DC measuring range 1-100 / 2-200 kOhm supply voltage 24-240 V AC/DC width 45 mm 1 + 1 or 2 changeover contacts screw terminal

product brand name	SIRIUS
product designation	Insulation monitoring relay with analog setting
product type designation	3UG4
General technical data	
product function	Insulation monitor
type of voltage	
<ul style="list-style-type: none"> for monitoring of the operating voltage for actuation of the control supply voltage 	AC/DC AC/DC AC/DC
surge voltage resistance rated value	4 000 V
protection class IP	IP20
thermal current of the switching element with contacts maximum	4 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/01/2012
Product Function	
product function	
<ul style="list-style-type: none"> error memory adjustable open/closed-circuit current principle manual RESET 	Yes No Yes
Control circuit/ Control	
control supply voltage at AC	
<ul style="list-style-type: none"> at 50 Hz rated value at 60 Hz rated value 	24 ... 240 V 24 ... 240 V
control supply voltage at DC rated value	24 ... 240 V
operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
<ul style="list-style-type: none"> initial value full-scale value 	0.85 1.1
Measuring circuit	
measurable line frequency	15 ... 400 Hz
measurable voltage at AC	0 ... 400 V

Auxiliary circuit		
number of NC contacts for auxiliary contacts	0	
number of NC contacts delayed switching	0	
number of NO contacts for auxiliary contacts	0	
number of NO contacts delayed switching	0	
number of CO contacts		
• delayed switching	2	
Main circuit		
operating frequency rated value	15 ... 400 Hz	
Connections/ Terminals		
product component removable terminal for auxiliary and control circuit	No	
type of electrical connection	screw-type terminals	
type of connectable conductor cross-sections		
• solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)	
• finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)	
• finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)	
• at AWG cables solid	1x (20 ... 12), 2x (20 ... 14)	
• at AWG cables stranded	1x (18 ... 14), 2x (18 ... 16)	
connectable conductor cross-section		
• solid	0.5 ... 4 mm ²	
• finely stranded with core end processing	0.5 ... 2.5 mm ²	
• finely stranded without core end processing	0.5 ... 2.5 mm ²	
AWG number as coded connectable conductor cross section		
• solid	20 ... 12	
• stranded	18 ... 14	
tightening torque with screw-type terminals	0.6 ... 0.8 N·m	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	snap-on fastening on 35 mm standard rail	
height	78 mm	
width	45 mm	
depth	100 mm	
required spacing		
• with side-by-side mounting		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
• for grounded parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— at the side	0 mm	
— downwards	0 mm	
• for live parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
Ambient conditions		
ambient temperature during operation	-25 ... +60 °C	
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



Confirmation



EG-Konf.

Declaration of Conformity	Marine / Shipping	other
---------------------------	-------------------	-------



Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4583-1CW31>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4583-1CW31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4583-1CW31>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4583-1CW31&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4583-1CW31/manual>

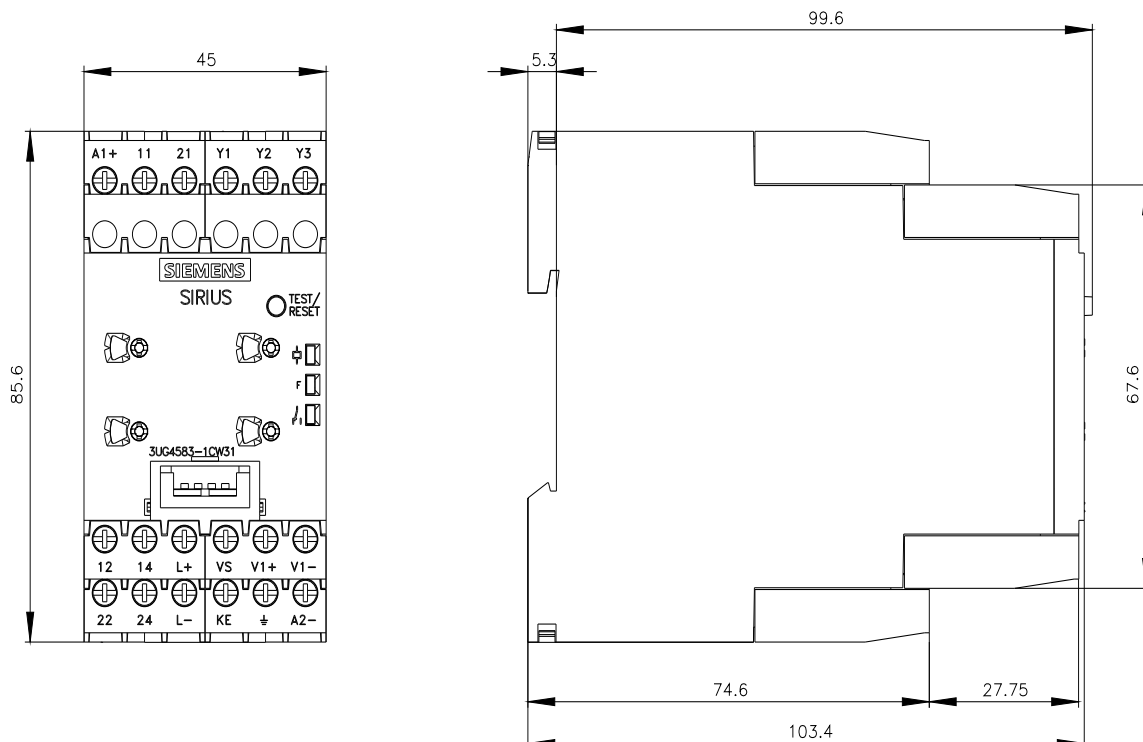

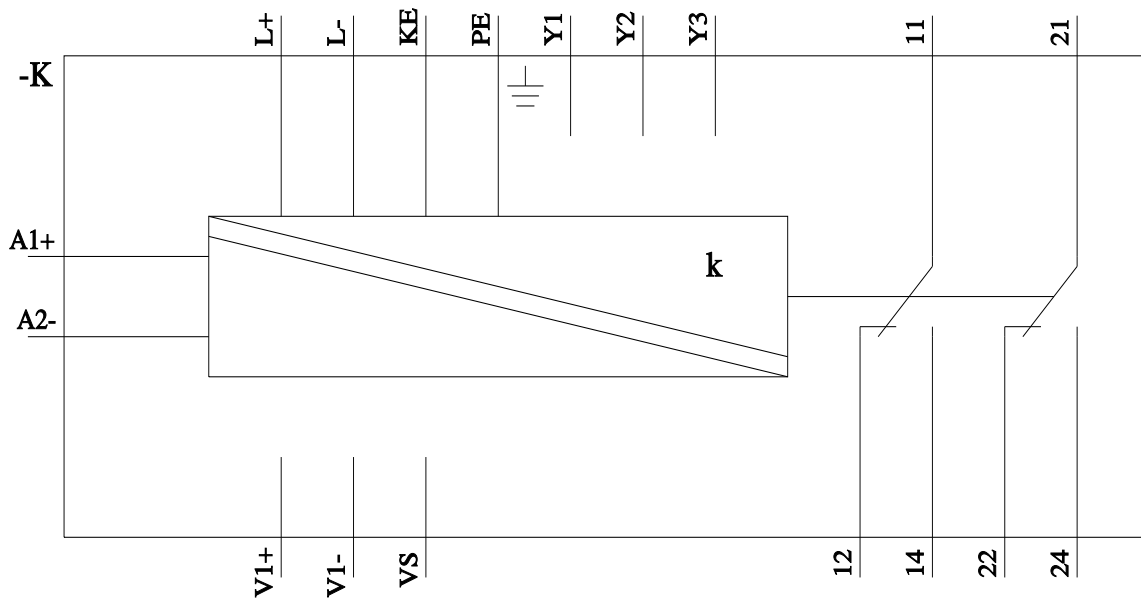

last modified:

7/13/2022 