

## G2-LAURA-WW-P

~65° wide beam. Assembly with thinner white holder, installation tape and location pins.

### SPECIFICATION:

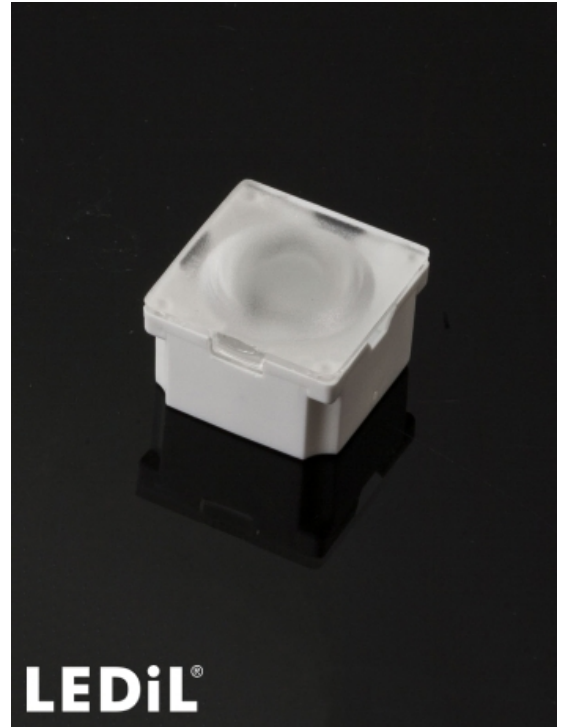
Dimensions	21.6 x 21.6 mm
Height	13.1 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ

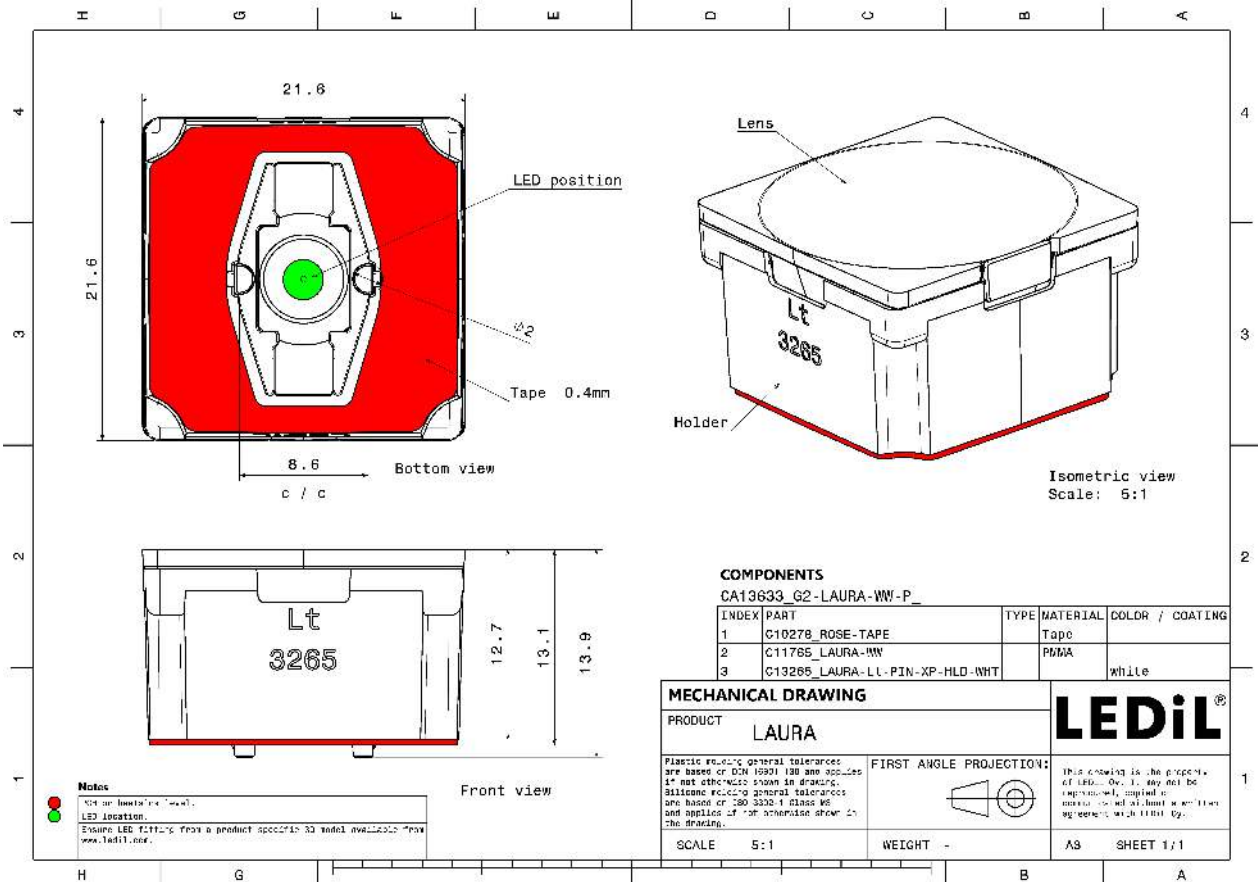
### MATERIALS:

Component	Type	Material	Colour	Finish
LAURA-WW	Single lens	PMMA		
LAURA-LT-PIN-XP-HLD-WHT	Holder	PC	white	
ROSE-TAPE	Tape	Acrylic foam	black	

### ORDERING INFORMATION:


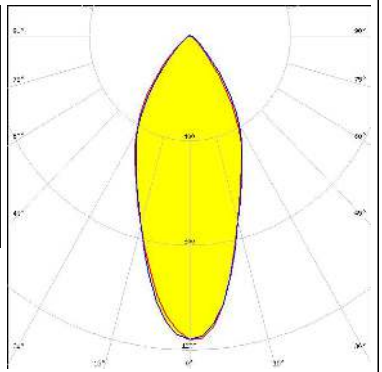


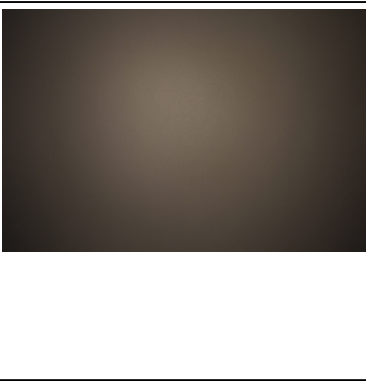
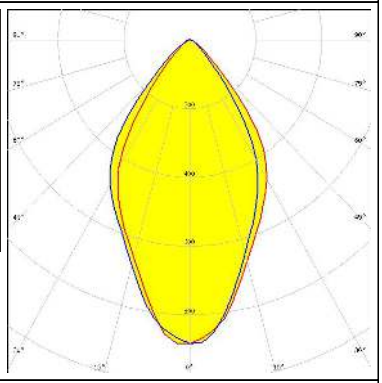

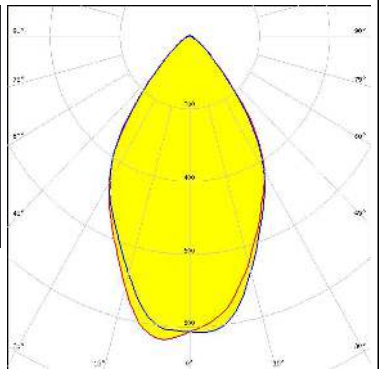
Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA13633_G2-LAURA-WW-P » Box size:		360	180	5.7



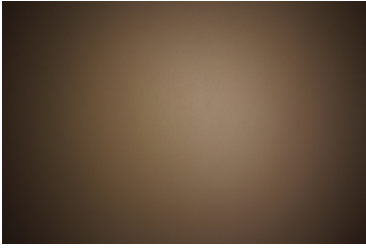
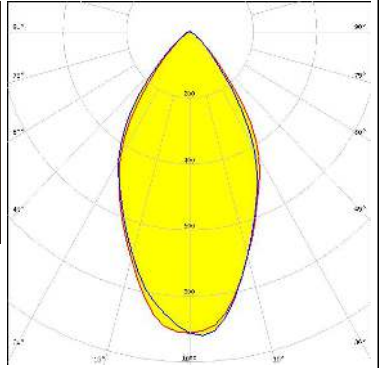

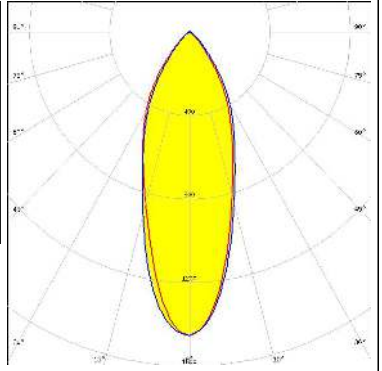
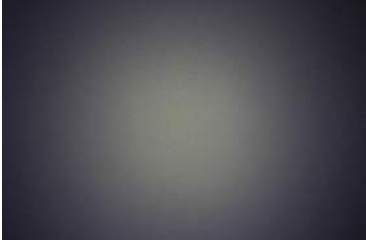

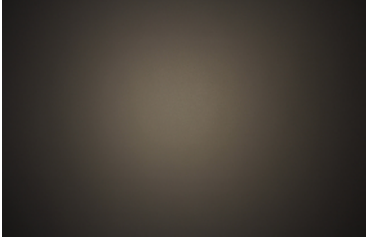
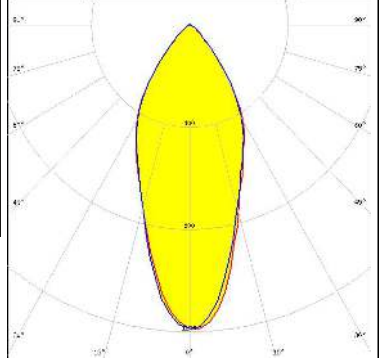


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)









#### OPTICAL RESULTS (MEASURED):
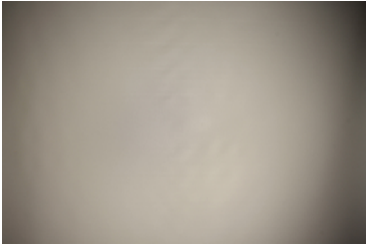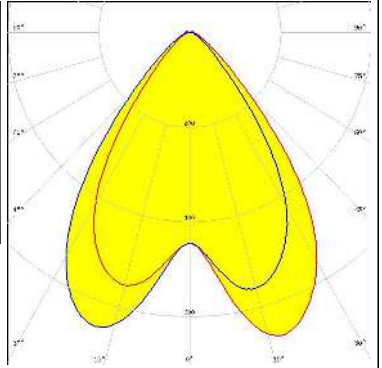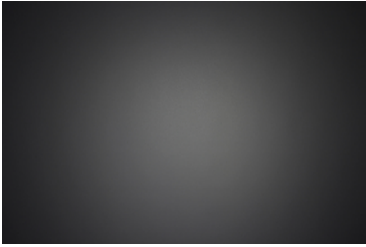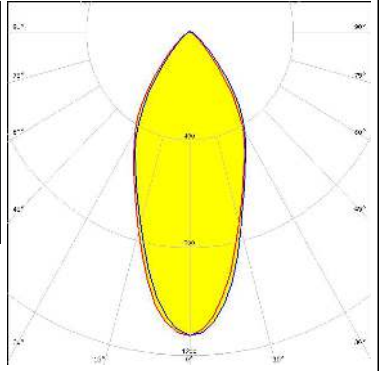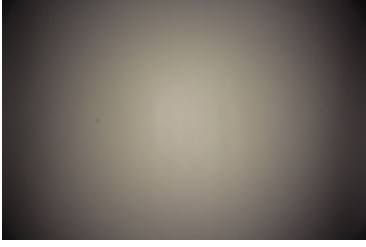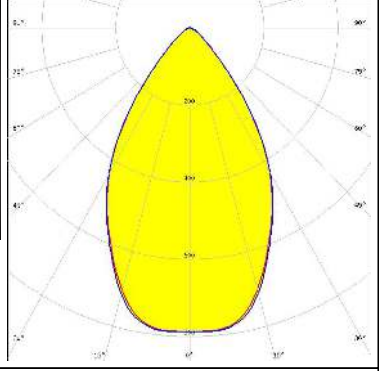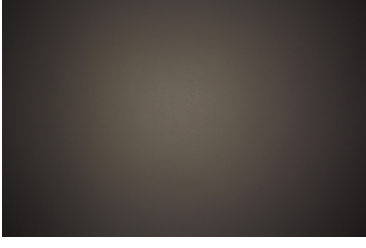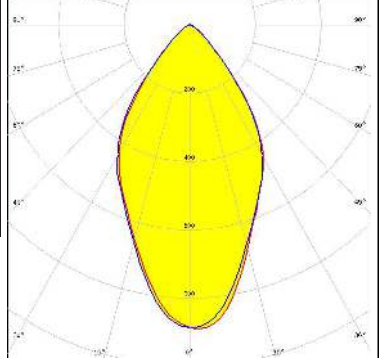
<p><b>CREE</b> ⇄ <b>LED</b></p> <p>LED            XB-D            FWHM / FWTM    44.0° / 88.0°            Efficiency        84 %            Peak intensity    1.2 cd/lm            LEDs/each optic   1            Light colour      White            Required components:</p>		
<p><b>CREE</b> ⇄ <b>LED</b></p> <p>LED            XP-E            FWHM / FWTM    66.0° / 96.0°            Efficiency        86 %            Peak intensity    0.7 cd/lm            LEDs/each optic   1            Light colour      White            Required components:</p>		
<p><b>CREE</b> ⇄ <b>LED</b></p> <p>LED            XP-E2            FWHM / FWTM    63.0° / 95.0°            Efficiency        87 %            Peak intensity    0.9 cd/lm            LEDs/each optic   1            Light colour      White            Required components:</p>		
<p><b>CREE</b> ⇄ <b>LED</b></p> <p>LED            XP-G2            FWHM / FWTM    64.0° / 97.0°            Efficiency        87 %            Peak intensity    0.8 cd/lm            LEDs/each optic   1            Light colour      White            Required components:</p>		

### OPTICAL RESULTS (MEASURED):

<p><b>CREE</b> LED</p> <p>LED XT-E            FWHM / FWTM 58.0° / 94.0°            Efficiency 86 %            Peak intensity 0.9 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>LUMILEDS</b></p> <p>LED LUXEON 3030 2D (Round LES)            FWHM / FWTM 36.0° / 82.0°            Efficiency 88 %            Peak intensity 1.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>LUMILEDS</b></p> <p>LED LUXEON TX            FWHM / FWTM 56.0° / 96.0°            Efficiency 86 %            Peak intensity 1 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>NICHIA</b></p> <p>LED NCSxx19A            FWHM / FWTM 43.0° / 88.0°            Efficiency 86 %            Peak intensity 1.2 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		



### OPTICAL RESULTS (MEASURED):

<p><b>NICHIA</b></p> <p>LED NVSW219D            FWHM / FWTM 81.0° / 113.0°            Efficiency 93 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>NICHIA</b></p> <p>LED NVSxx19A            FWHM / FWTM 44.0° / 89.0°            Efficiency 85 %            Peak intensity 1.1 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>NICHIA</b></p> <p>LED NVSxx19B/NVSxx19C            FWHM / FWTM 62.0° / 95.0°            Efficiency 86 %            Peak intensity 0.8 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED OSLON Square EC            FWHM / FWTM 60.0° / 96.0°            Efficiency 86 %            Peak intensity 0.9 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		



### OPTICAL RESULTS (MEASURED):
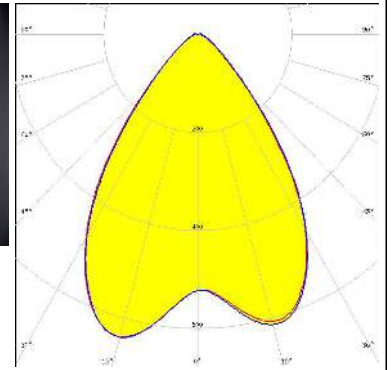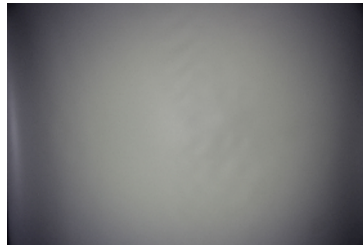
#### SAMSUNG



LED LH351D  
 FWHM / FWTM 78.0° / 110.0°  
 Efficiency 93 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



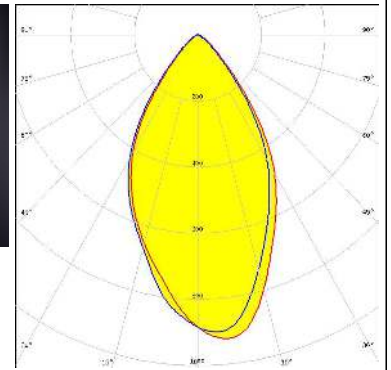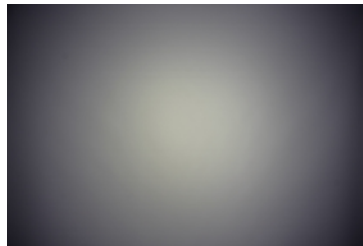SEOUL SEMICONDUCTOR  
 LED Z5M1/Z5M2  
 FWHM / FWTM 58.0° / 93.0°  
 Efficiency 86 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



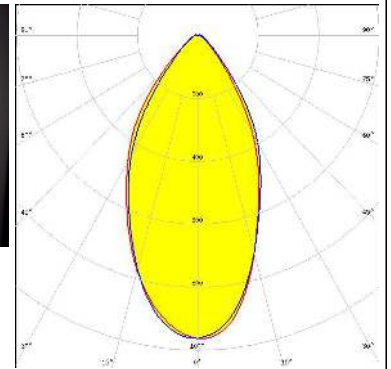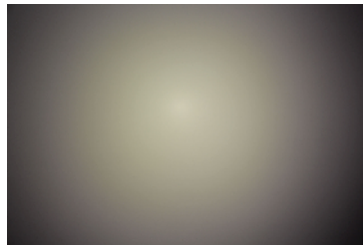
SEOUL SEMICONDUCTOR  
 LED Z5M3  
 FWHM / FWTM 54.0° / 94.0°  
 Efficiency 93 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



### OPTICAL RESULTS (SIMULATED):


#### CREE LED

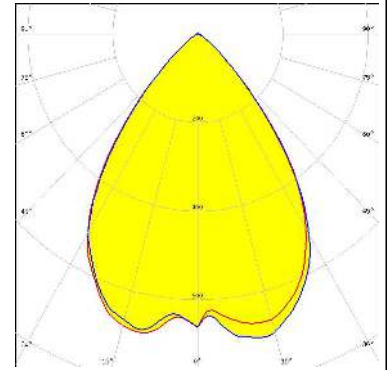LED XHP35 HI  
 FWHM / FWTM 74.0° / 100.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



#### CREE LED

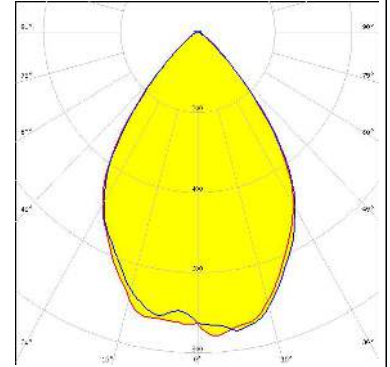LED XP-G3  
 FWHM / FWTM 72.0° / 100.0°  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




#### CREE LED

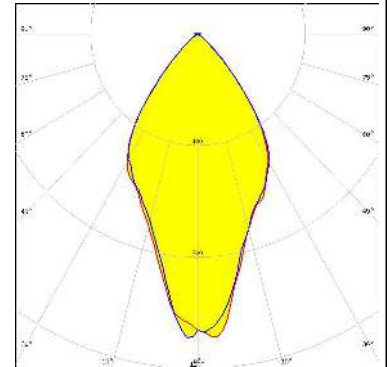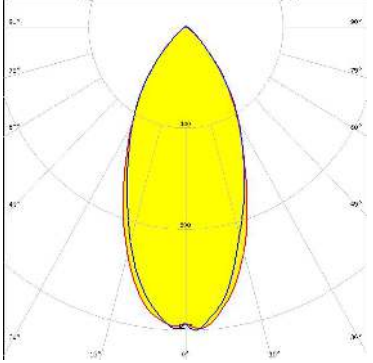
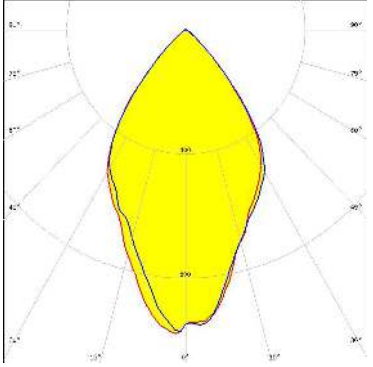

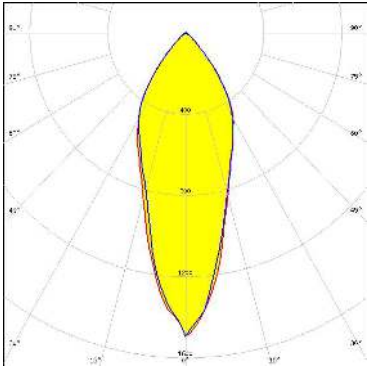
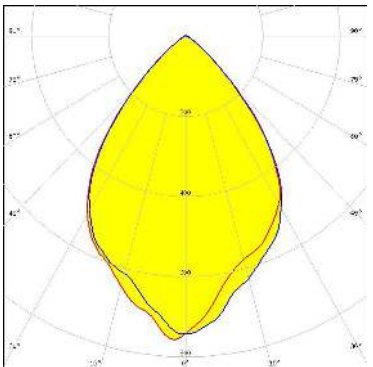
LED XP-L2  
 FWHM / FWTM 72.0° / 102.0°  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

#### CREE LED

LED XQ-E HI  
 FWHM / FWTM 58.0° / 92.0°  
 Efficiency 96 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



### OPTICAL RESULTS (SIMULATED):

<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED Duris S8</p> <p>FWHM / FWTM 48.0° / 90.0°</p> <p>Efficiency 97 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLOM Square CSSRM2/CSSRM3</p> <p>FWHM / FWTM 63.0° / 95.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLOM Square Flat</p> <p>FWHM / FWTM 35.0° / 86.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLOM SSL 150</p> <p>FWHM / FWTM 74.0° / 103.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		



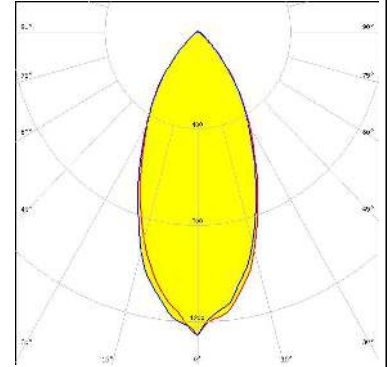
### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED SFH 4770S  
FWHM / FWTM 32.0° / 80.0°  
Efficiency 92 %  
Peak intensity 1.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


**SAMSUNG**

LED LH508A  
FWHM / FWTM 47.0° / 89.0°  
Efficiency 97 %  
Peak intensity 1.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:



**SEMI**  
SEOUL SEMICONDUCTOR

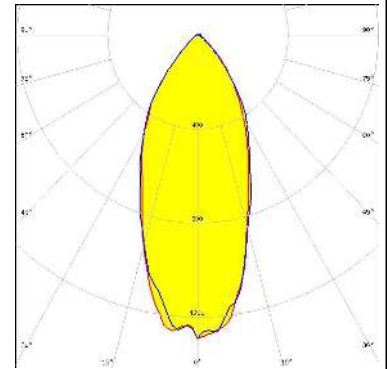LED Z8Y22P  
FWHM / FWTM 42.0° / 88.0°  
Efficiency 97 %  
Peak intensity 1.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:



### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)