
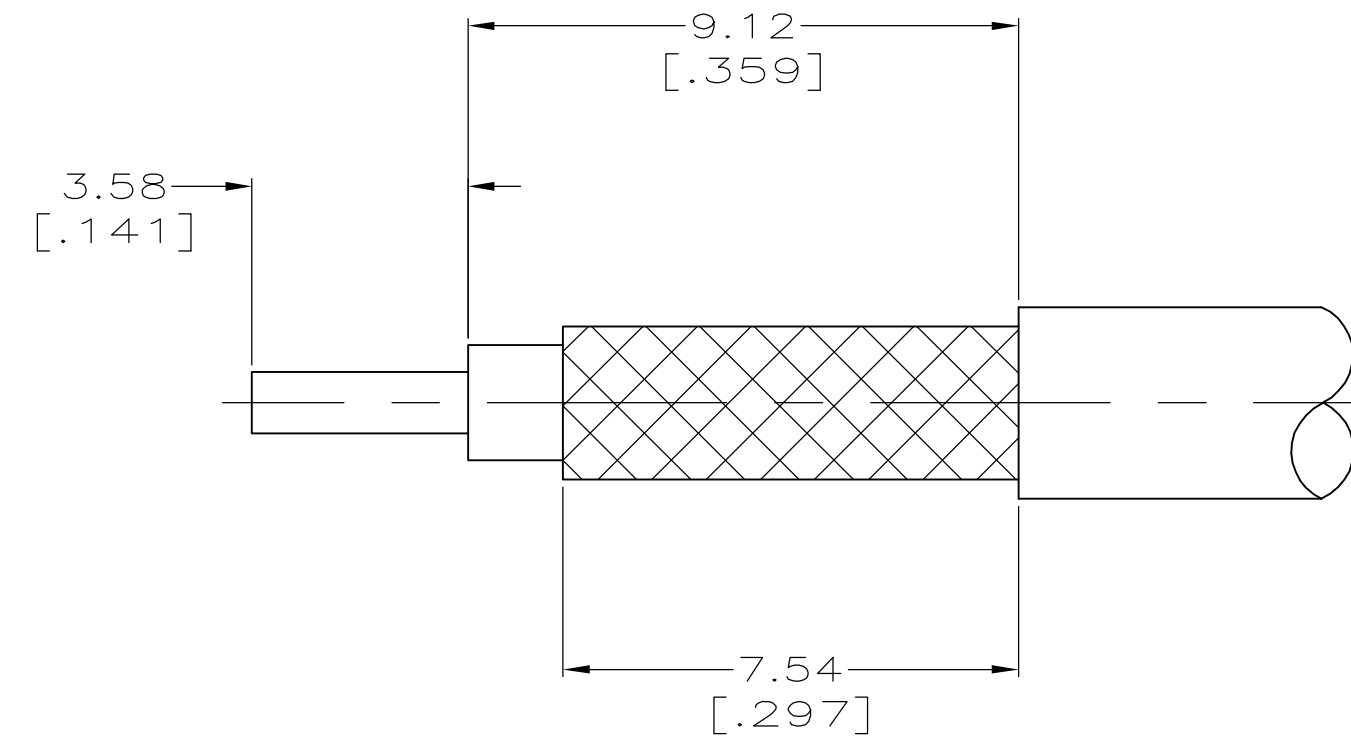


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	01	REVISED PER ECO-05-007704	02SEP05	BM KW

- 1 CONTACT CRIMP TOOLING: CRIMP TOOL M22520/2-01 WITH POSITIONER DMC K997 SELECTOR SETTING #4 FOR RG-174/U, RG-188/U & RG-316/U SINGLE AND DOUBLE SHIELDED CABLE.
- 2 FERRULE CRIMP TOOLING: CRIMP TOOL M22520/5-01 WITH DIE SET M22520/5-35B OR USE A 3.25 [.128] X 10.16 [.400] HEX DIE SET.
- 3. PRODUCT DESIGNED TO MEET PRODUCT SPECIFICATION 108-1574.
- 4. INSTRUCTION SHEET: 408-4032

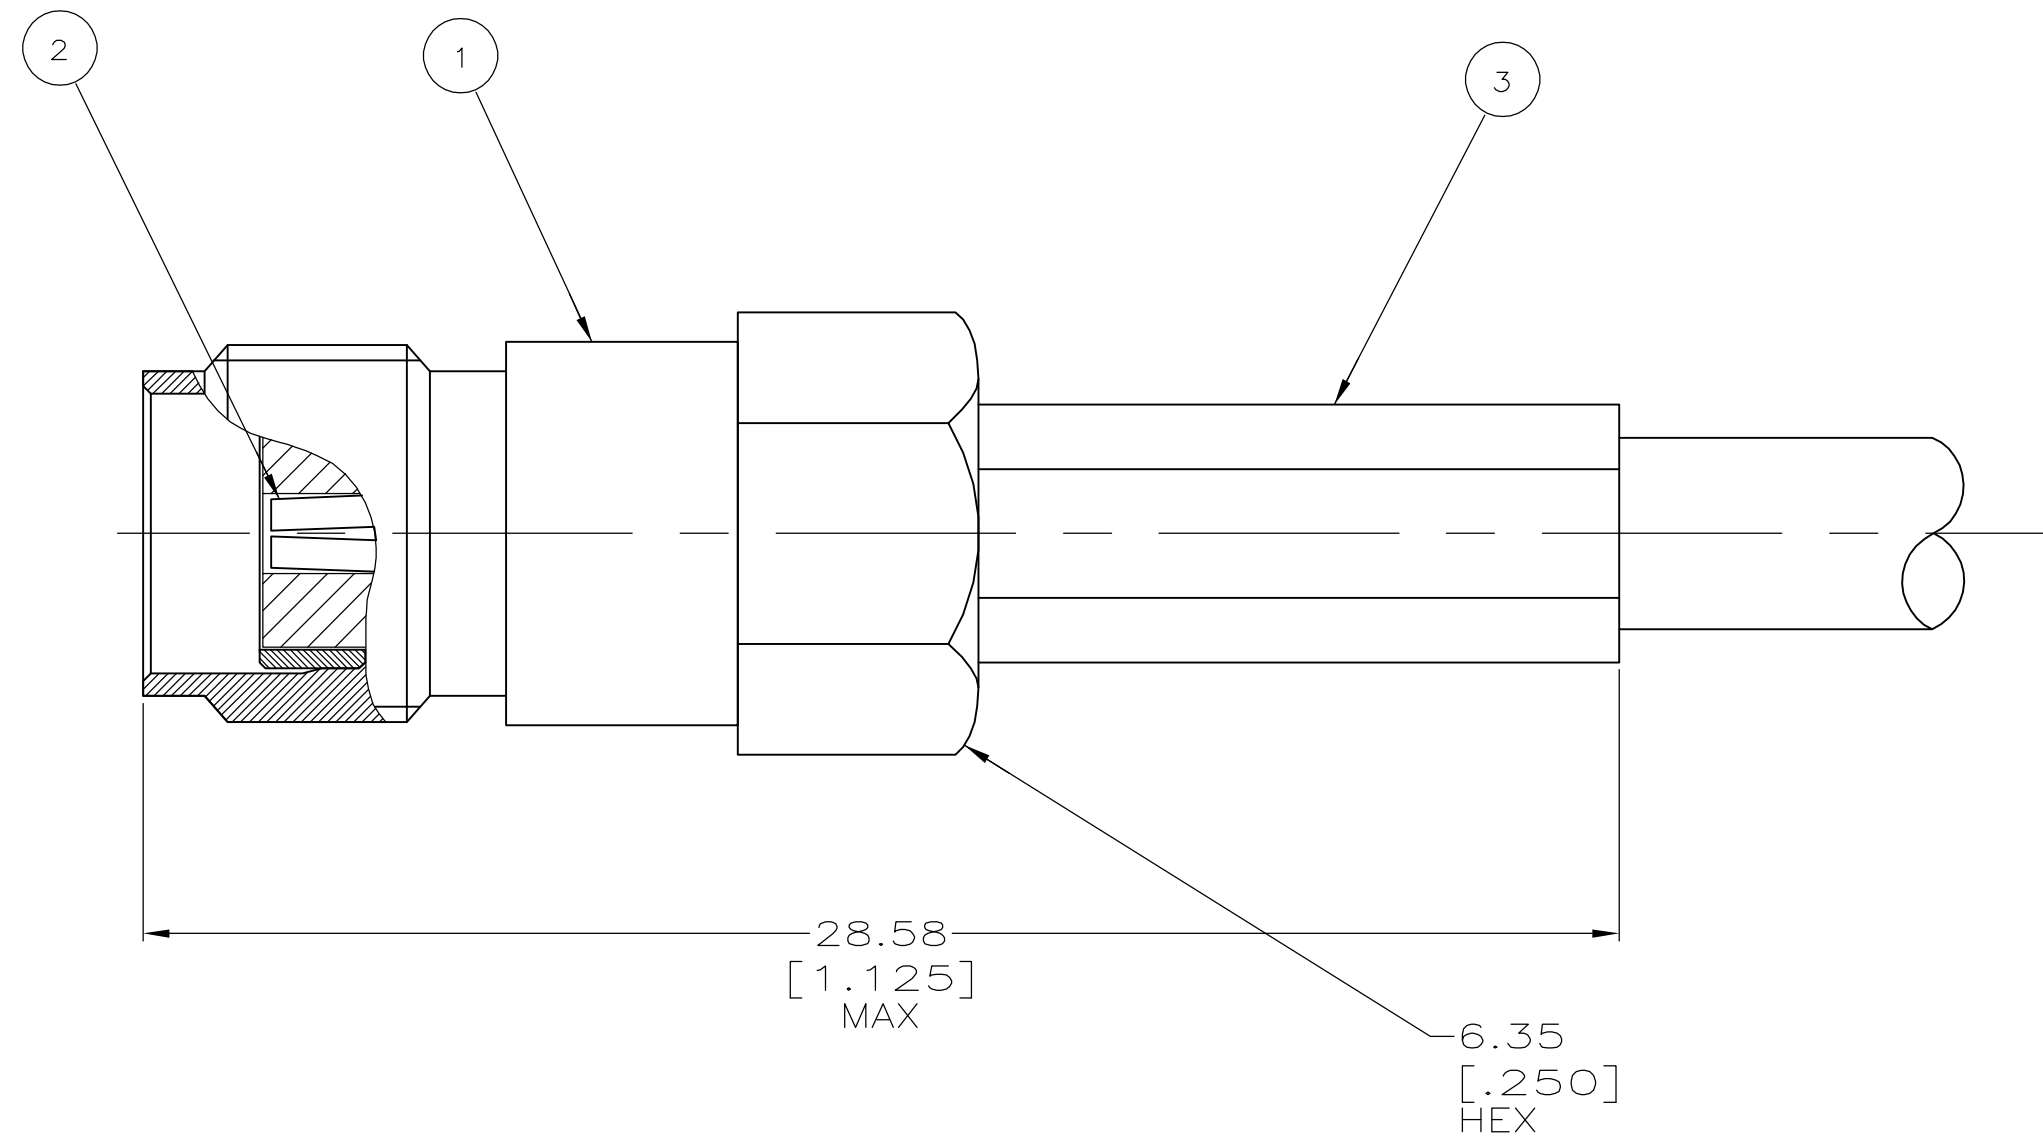

RECOMMENDED STRIP LENGTHS

△△	RG-174, -188, & -316/U	9-446556-1	447842-3	447963-2	5447648-3
CRIMP TOOLING	CABLE	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	L. VARELA - 31JAN2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHK	J. HAVENER - 31JAN2005	
APVD	D. CAMELIO - 31JAN2005	
NAME		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	JACK, HEX CRIMP, COMMERCIAL, SMA
mm [INCHES]	0 PLC ± - 1 PLC ± - 2 PLC ± 0.40 [.016] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -	
MATERIAL		SIZE A2 CAGE CODE 00779 DRAWING NO C=5447648 RESTRICTED TO -
CUSTOMER DRAWING		SCALE 8:1 SHEET 1 OF 1 REV 01