

**Harvatek 4.7mm Round LED LAMP WITH HOLDER****HV-I8UG60G-MP9AA-U1930**

---

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 1/12

## DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## LIFE SUPPORT POLICY

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

---

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.		Data Sheet No.
	*****	*****		HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 2/12	

## Compliance and Certification

ISO9002, QS9000 and ISO14001 Certified  
RoHS Compliant



## Orderable Information

**H V - I8 UG 60 G - MP9AA - U1930**


Series Name	Color Code	Remark
<b>HV :</b> <b>HARVATEK</b>	<b>I8UG:</b> <b>4.7mm Round LED Lamp With Holder.</b> <b>With AlGaInP 570nm Green Chip.</b> <b>60 : Viewing angle 60 deg.</b> <b>G : HARVATEK Part No.</b> <b>MP9 : Square HOLDER</b> <b>AA : 1 LAMP</b>	<b>U1930:</b> <b>Customer Product Code</b>

## Features:


- Stable Color
- Popular 4.7mm through hole package
- Green Diffusedlens

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 3/12


## Package Dimensions:

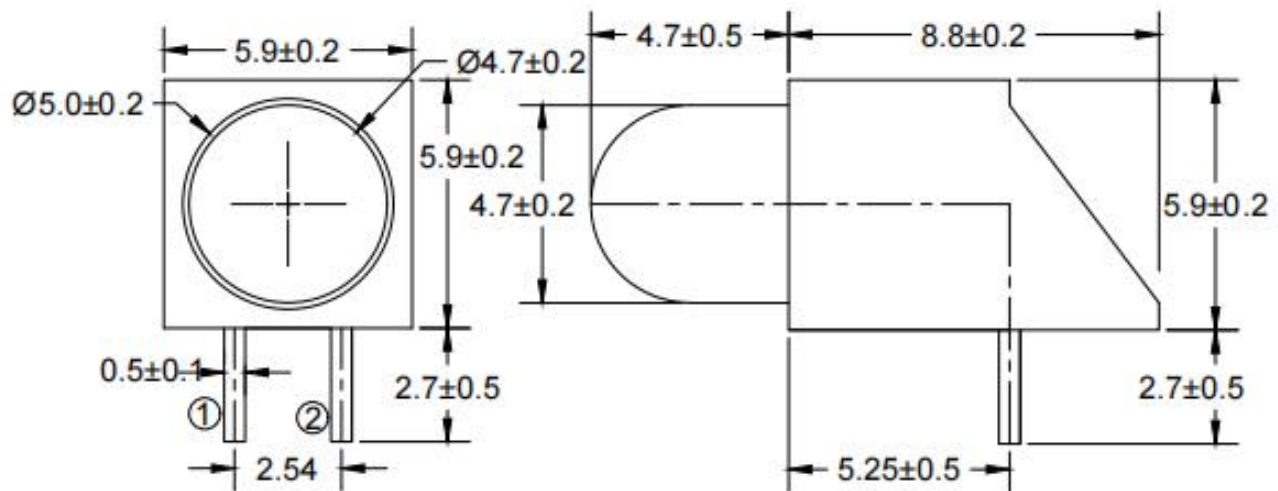

### RECOMMENDED PCB LAYOUT



- ① Anode
- ② Cathode

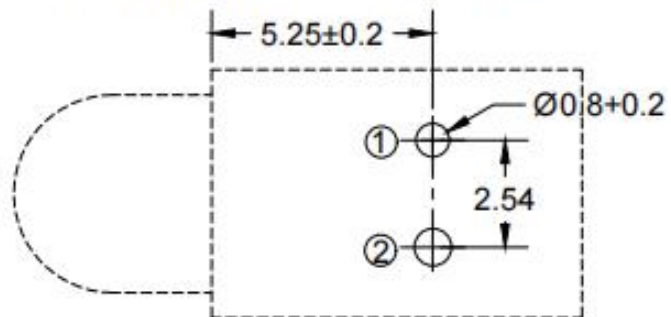

### Notes:

1. All dimensions are millimeters.
2. Tolerance is  $\pm 0.25$  mm unless otherwise noted.
3. Specifications are subject to change without notice.

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Aug.14.2021	Version of 1.0
			Page 4/12

## Absolute Maximum Ratings at Ta=25°C

Parameter	Max.	Unit
<b>Power Dissipation</b>	<b>70</b>	<b>mW</b>
<b>Peak Forward Current</b> (1/10Duty Cycle,0.1ms Pulse width)	<b>100</b>	<b>mA</b>
<b>Continuous Forward Current</b>	<b>30</b>	<b>mA</b>
<b>Reverse Voltage</b>	<b>5</b>	<b>V</b>
<b>Operating Temperature Range</b>	<b>-40°C to +85°C</b>	
<b>Storage Temperature Range</b>	<b>-40°C to +85°C</b>	
<b>Lead Soldering Temperature</b> <b>【2mm From Body】</b>	<b>260°C for 5 Seconds (max.)</b>	

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 5/12

## Electrical and Optical Characteristic

Parameter	Symbol	Min.	Typ.	Max	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>	50	130	---	mcd	If=20mA
Viewing Angle	2θ ½	---	60	---	Deg	If=20mA
Peak Emission Wavelength	λ <sub>p</sub>	---	575	---	nm	If=20mA
Dominant Wavelength	λ <sub>d</sub>	---	570	---	nm	If=20mA
Spectral Line Half-Width	Δλ	---	30	---	nm	If=20mA
Forward Voltage	V <sub>f</sub>	---	2.0	2.4	V	If=20mA
Reverse Current	I <sub>R</sub>	---	---	10	μA	VR=5V

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.		Data Sheet No.
	*****	*****		HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Aug.14.2021	Version of 1.0	Page 6/12

**Specifications for Bin Grading:**

Iv (mcd)		
Grade	Min.	Max.
Q	50	125
R	100	200
S	160	320
T	250	500
U	400	800


$\lambda d$ (nm)		
Grade	Min.	Max.
5	566	569
6	568	571
7	570	573
8	572	575
9	574	577

Notes:

- 1.Luminous intensity: +/-15%.
- 2.Wavelength: +/-1nm.

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.		Data Sheet No.
	*****	*****		HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Aug.14.2021	Version of 1.0	Page 7/12

**Typical Electro-Optical Characteristics Curves**

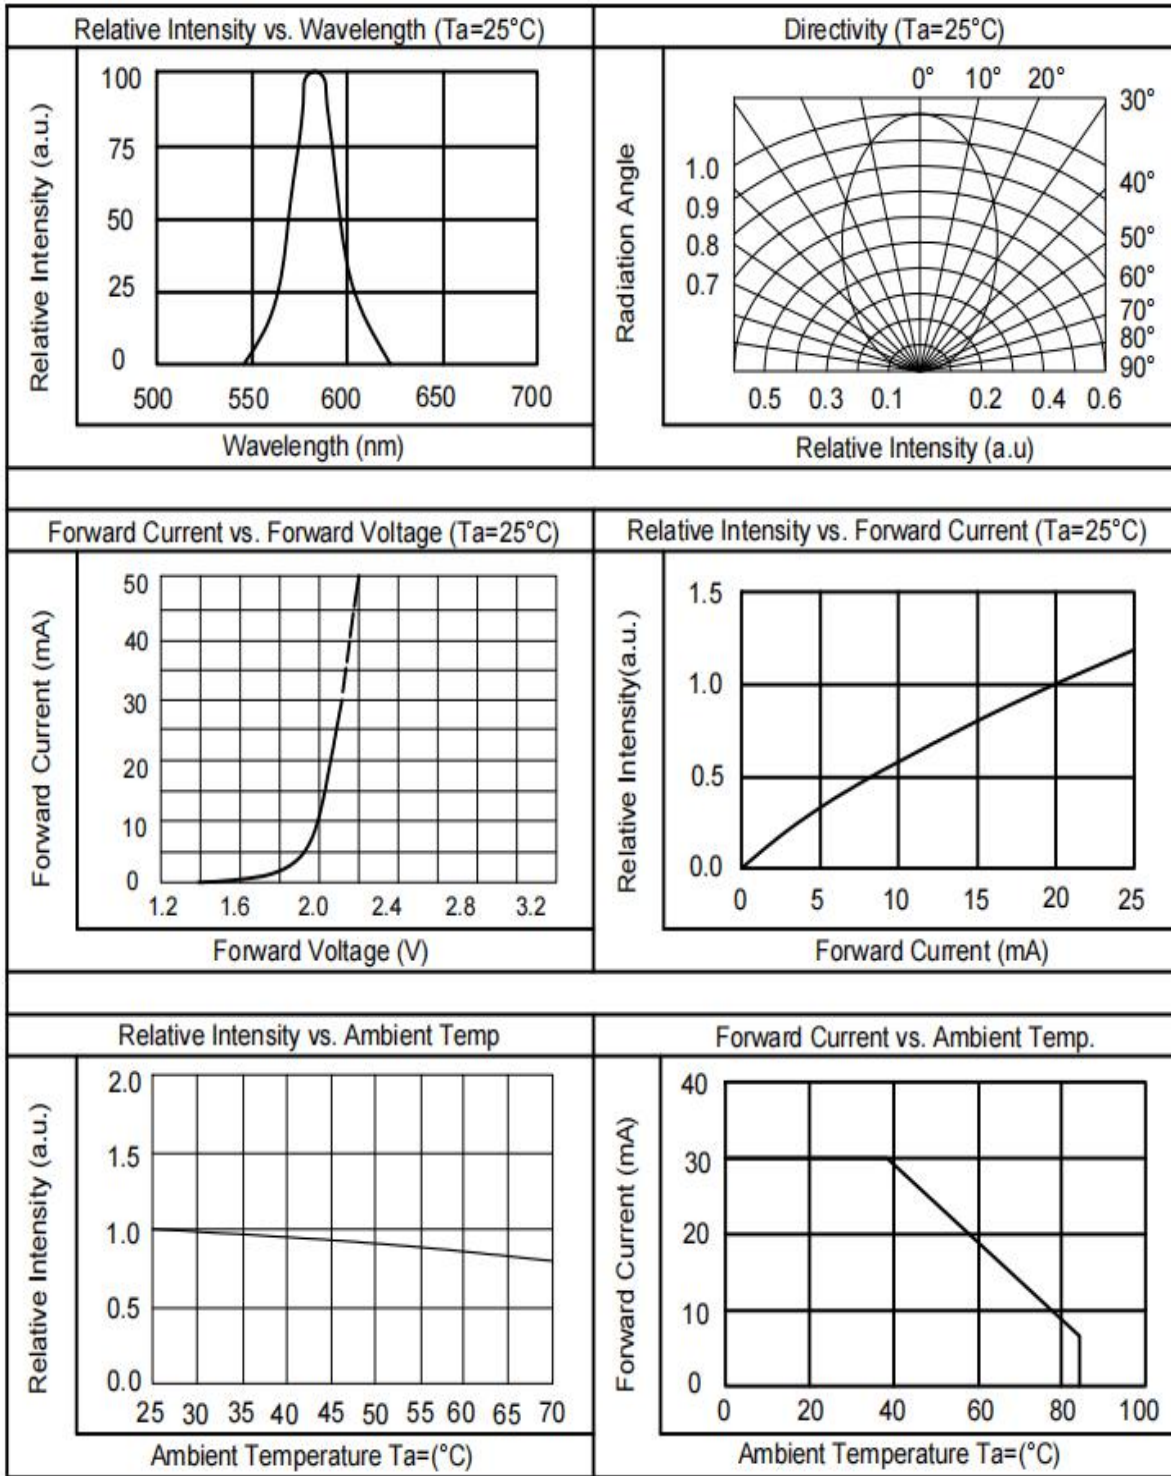

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Aug.14.2021	Version of 1.0
			Page 8/12




**Soldering condition**

1. Careful attention should be paid during soldering. When soldering, leave more than 2mm from solder joint to Led, and soldering beyond the base of the tie bar is recommended.
2. Avoiding applying any stress to the lead frame while the LED are at high temperature particularly when soldering.
3. Dip and hand soldering should not be done more than one time.
4. After soldering the LED, the epoxy bulb should be protected from mechanical shock or vibration until the LED return to room temperature.
5. A rapid-rate process is not recommended for cooling the LED down from the peak temperature.
6. Although the recommended soldering conditions are specified in the above table, dip or hand soldering at the lowest possible temperature is desirable for the LED.
7. Wave soldering parameter must be set and maintain according to recommended temperature and dwell time in the solder wave.

**• Recommended soldering conditions**

Hand Soldering		Wave Soldering	
Temp. at tip of iron	300°C Max. (30W Max.)	Preheat temp.	160°C Max. (120 sec Max.)
Soldering time	3 sec Max.	Bath temp. & time	260 Max., 5 sec Max
Distance	2mm Min.(From solder joint to Led)	Distance	2mm Min. (From solder joint to Led)

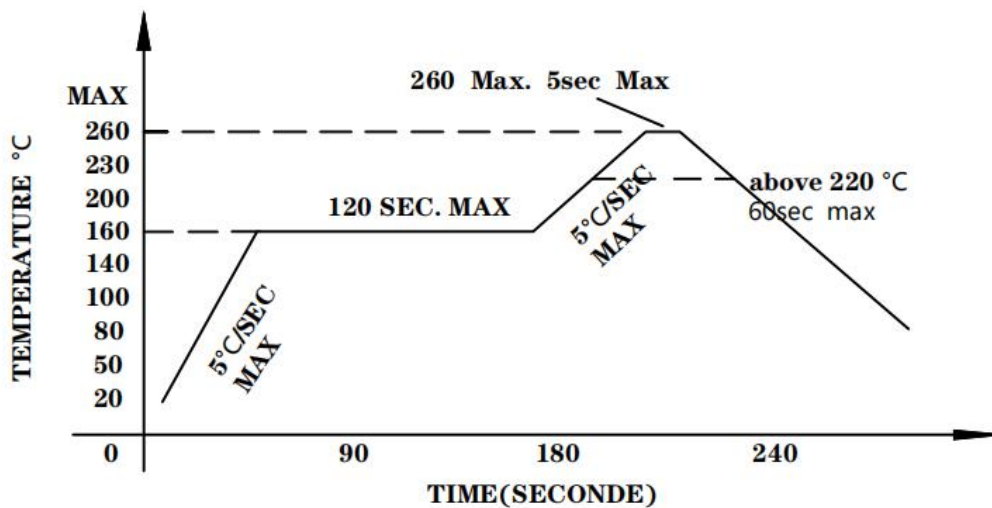

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 9/12

## Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level: 97%

LTPD:3%

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Failure Judgment Criteria	Ac/Er
1	Solder Heat	TEMP:260°C±5 °C	10 SEC	76 PCS	$I_v \leq I_{vt} * 0.5$ or $V_f \geq U$ or $V_f \leq L$	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5min L:-40°C 15min	300 CYCLES	76 PCS		0/1
3	Thermal Shock	H:+100°C 5min ∫ 10sec L:-10°C 5min	300 CYCLES	76 PCS		0/1
4	High Temperature Storage	TEMP:100°C	1000 HRS	76 PCS		0/1
5	Low Temperature Storage	TEMP:-40°C	1000 HRS	76 PCS		0/1
6	DC Operating Life	TEMP:25°C IF=20mA	1000 HRS	76 PCS		0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 HRS	76 PCS		0/1

Note:  $I_{vt}$ : To test  $I_v$  value of the chip before the reliability test.


$I_v$ : The test value of the chip that has completed the reliability test

U: Upper Specification Limit

L: Lower Specification Limit

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.		Data Sheet No.
	*****	*****		HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Aug.14.2021	Version of 1.0	Page 10/12

## Packing Specification:

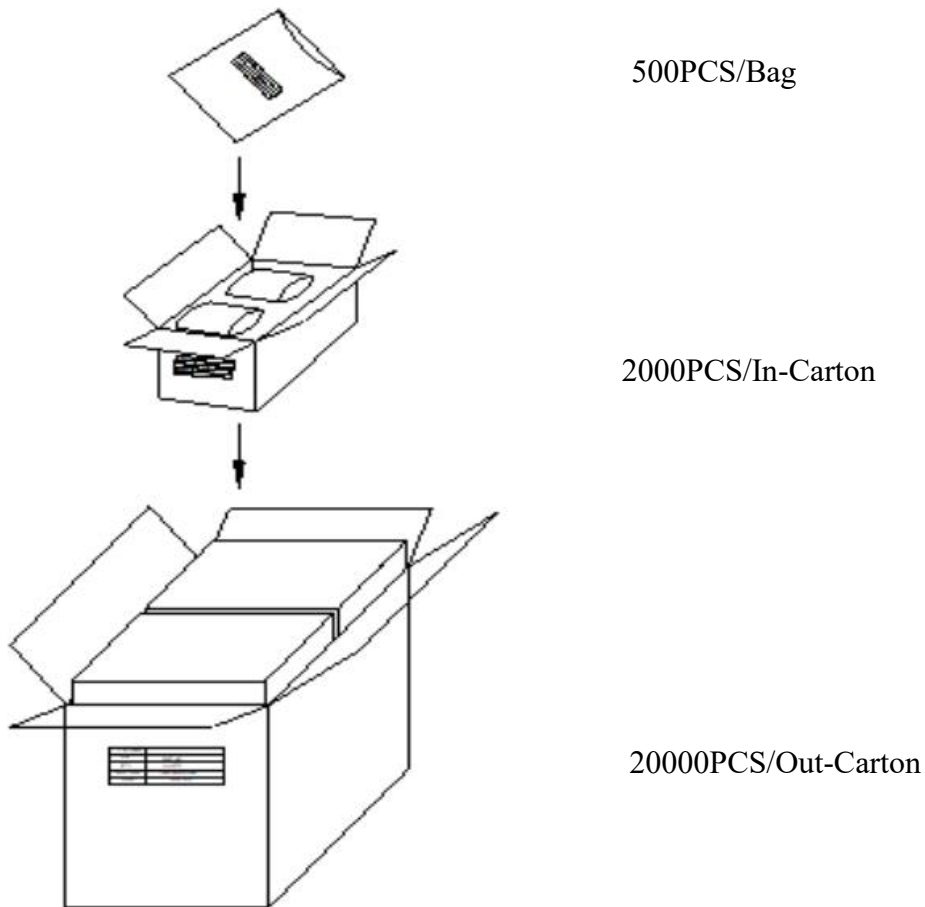

	<b>HARVATEK</b>	
CPN:		<b>RoHs</b>
P/N:		
	<b>HV-I8UG60G-MP9AA-U1930</b>	
QTY:		CAT:
		HUE:
LOT NO:		REF:

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 11/12

**Revision History**

Revision	Page	Version No.	Revision Date
Initial Release		1.0	08-14-2021

Official Product	HV-I8UG60G-MP9AA-U1930	Customer Part No.	Data Sheet No.
	*****	*****	HV-I8UG60G-MP9AA-U1930
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	Aug.14.2021	Version of 1.0	Page 12/12