
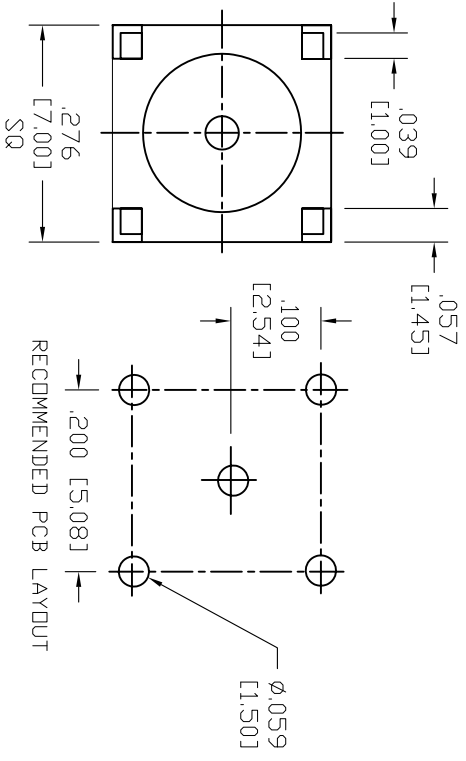


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	9114	RELEASED	11/04/08	
A	9114	REDRAWN	10/18/12	
B		REVISED PIN MATERIAL	8/13/13	
C		ADDED SPEC.	5/28/14	AV/SY

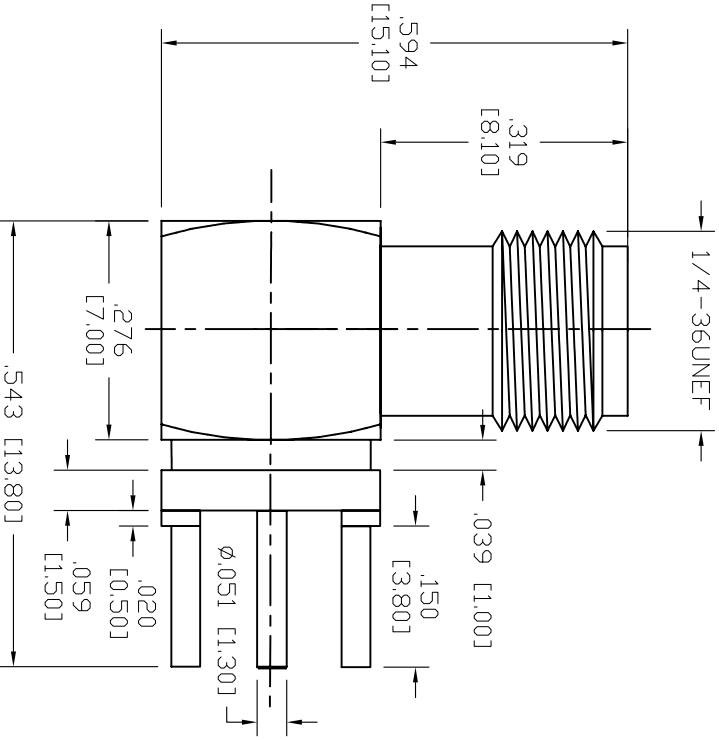

DESCRIPTION	MATERIAL	QTY	FINISH
CHASDISIS	BRASS	1	GOLD
INSULATOR B	TEFLON	1	NONE
PIN	BRASS	1	GOLD
INSULATOR A	TEFLON	1	NONE
WASHER	BRASS	1	GOLD
BODY	BRASS	1	GOLD

**SPECIFICATIONS:**  
 Electrical:  
 Frequency range: 0-18 GHz  
 Working Voltage: 250 VRMS max.  
 Dielectric Withstanding Voltage: 750 VRMS max.  
 Contact Resistance: 6 Milliohms max. (Center Contact)  
 2 Milliohms max. (Outer Contact)

Insulator Resistance: 5000 Megohms min.  
 Temperature Rating:  
 Operating temperature: -65°C to +165°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ± .10 Ø.X ± .10  
 .XX ± .020 Ø.XXX ± .015  
 .XXX ± .015 Ø.XXXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN DY	11/04/08
CHECKED	
APPROVED	

TITLE	SMA JACK R/A PCB MOUNT, FEMALE PIN
SIZE	PART NO.
X	RF2-03-1-00-50-G
REF:	SCALE: NTS
	SHEET 1 OF 1