

Model No.: **GP1604G**


NO MERCURY ADDED	
Description	: Mercury Free Layer Built Extra Heavy Duty Battery
Chemical System	: Carbon Zinc
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 26.5 mm x 17.5 mm x 48.5 mm
Terminals	: Standard snap fastener stud (+) and socket (-)
Jacket	: Metal jacket
Applications	: Electronic devices, multi meter, toys, remote controls.
Average Weight	: 36g

Cross References:

GP	JIS	IEC	Eveready
1604G	6F22	6F22	1222

Estimated Service:



Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/ Day 7 Days/ Week	5.4V	29.0 Hrs
180 Ohms	30 Mins/ Day 7 Days/ Week	4.8V	8.0 Hrs

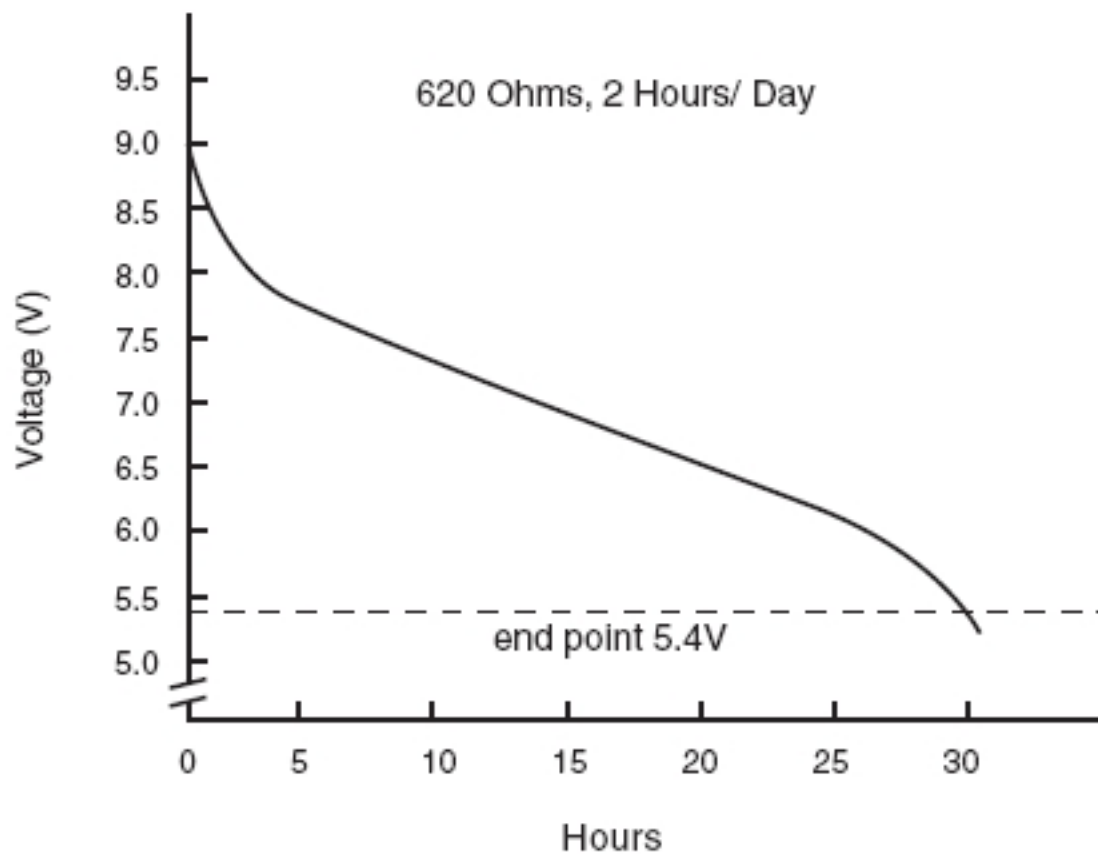

At 20°C within 30 days of manufacture

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

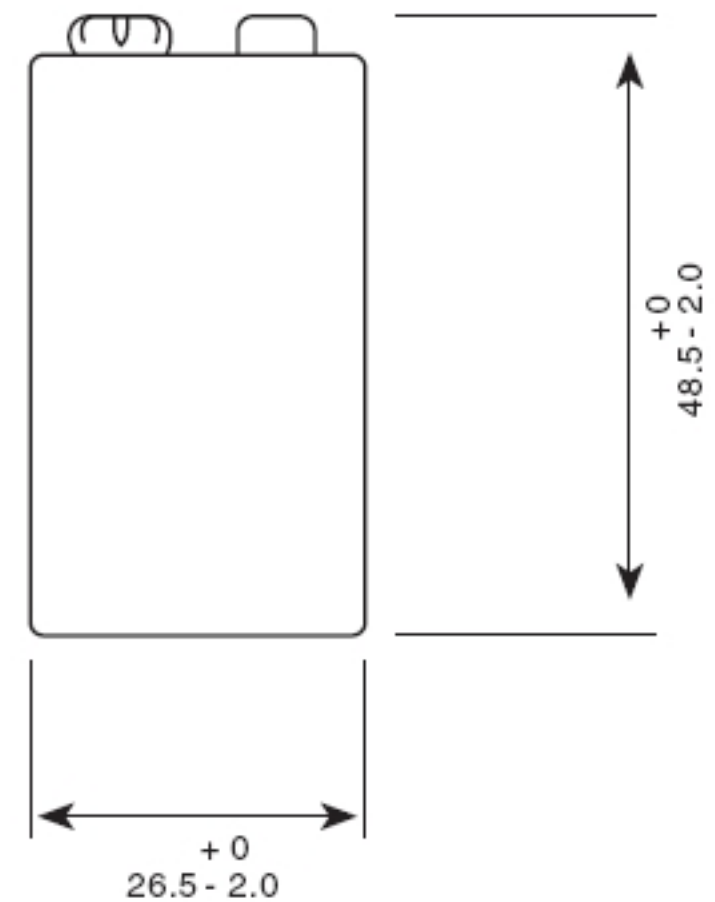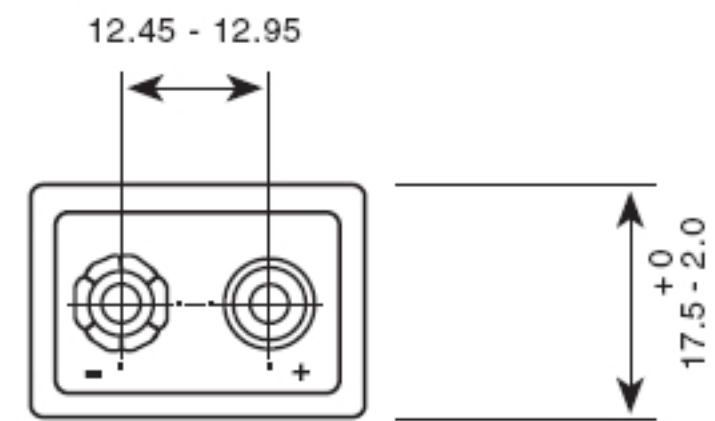

Unit : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.