
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION								
REV	DESCRIPTION	DATE	APPROVED					
A	INITIAL RELEASE, RFS.6296, DMR	05/26/05	BS					
В	ADD ROHS, RFS. 14338, JS	08/13/08	BS					
С	CHANGE COLOR TO BLACK/WHITE/GREEN, RFS. 25201, JS	08/13/08	BS					



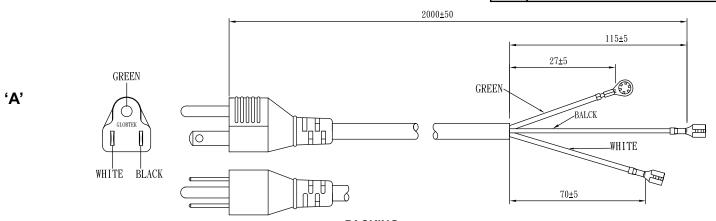

'B'

GENERAL SPECIFICATIONS:

RATING: 15A / 125V AC

CABLE TYPE / SIZE: SJT, # 14 AWG, 3 CONDUCTOR


TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK OVERALL LENGTH (L): $2000 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $9.3 \pm 0.15 \text{ mm}$ END 'A' PLUG; NEMA 5-15P

END 'B' SEE TERMINATION TABLE

APPROVALS PLUG: UL, CSA OR cUL
APPROVALS CABLE: UL, CSA OR cUL



NOTES:

 CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ <u>+</u> 5 mm	RIJ <u>+</u> 1mm	Terminal
NEUTRAL	WHITE	70	-	MOLEX 19017-0037 OR EQUIVALENT
LINE	BLACK	115	-	MOLEX 19017-0037 OR EQUIVALENT
GROUND	GREEN	27	-	KEYSTONE # 7318 OR EQUIVALENT

l		 								
Complies with Requirements of California PROPOSITION 65		DASH NO.	PART NO	REV.		DESCRIPTION NOTE		NOTES		
		TABULATION BLOCK								
				TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		w	lobTek [®] , Inc.	186 Veterans Dr. Nort Tel. 201-784-1000 F		
Contents of this document are subject to change without prior notice	mission critical components in life support, haz- ardous environment, nuclear or aircraft applications without prior written approval from the CFC of Globbek Inc.	INIT.BY: DMR	DATE: 05/27/05	MILLIMET .xx +/- 0. .xxx +/0	3 +/- 1°	DWG TITLE	: NORTH AMERICAN	NON-DETACHABLE C	ORDSET	
		DRAWN, NI	DATE: 05/27/05	FSCN No G, CC, Y					REV. C	
		APRVD: DMR	DATE: 05/27/05	SCALE: NONE		PART NO:	3011046F7TTR(R)		SHEET 1/1	