


Ŧ	G	нт — — — — — — — — — — — — — — — — — — —	m	0



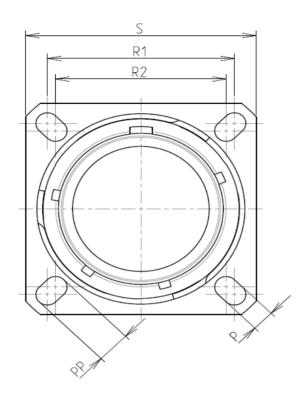



LAYOUT SHOWN AS

Keying Shown as example

Connector dimension

Nominal

CONTACT LAYOUT : 11-01

D

Е

Dim

CHARACTERISTICS

PLATING : S = Nickel

Н

ω

-Standard : Based on MIL-DTL-38999 Series III

		The Bire Sossis Series III									1
\triangleleft		: Stainless Steel						F)	3.25±0.2	
								Р	Р	4.93±0.2	
	-Shell Plating	: Nickel						R	1	20.62	
	-Insulator	: Thermoplastic						R		18.26	
	-Contacts	: Copper Alloy							5	26.2±0.3	
	-Seals & Grommet	: Silicon Elastomer							/	20.83+0/-1.25	
								V	-	2.1/2.5	
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm	minim	num					2	31.5 Max	
	-Durability	: 500 Mating cycles						VV TH	IREAD	M15x1-6g	l
	-Delivered without Sou	riau contacts									
	Delivered without 500										
	-Temperature Range	: -65°C to +200°C									
	-Salt Spray	: 500 hours									
_	-Mass	: 30.87 g ± 10%									
	BASIC SERIES:	8D 0 -	11	S	01	S	А	L			
_	→ SHELL TYPE : Square Flange Receptacle									Delivered W/	O Contacts
	CONTACT TYPE : Sta	ndard Crimp Contact								ORIEN	TATION : A
	SHELL SIZE : 11							CONTAC	T TYPE : SOCKET(50	0 Matings)	
				1							

G

F

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment



	Ξ		A		_		
					4		
AS EXAM	PLE				3		
s which c er of the	loes not co Parties or k technical n Jurisd	by a third part			2		
					-		
		CUSTOME	R DRAWING	MOD N°			
Steel Receptacle 8D series							
ar			PROJECT 59		1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	rg n° Al-C			SHEET 1/2			
	B		A		J		

	工	۵	بر	m	D	0
		Contact Layout				Panel Cutout
4	(01			22	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y 0 0			¥	Dim
ω			7			ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
N					A 07-10-202	Country FR PN: 8D011S(
					ISS DATE Designed By:	Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011S0
l	H	G	F	E	D	C

