


REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
E5	REVISED PER	ECO-21-006541	11JUN2021	RK AS



Materials			
No.	Component name	Base material	Finish
1	Housing	High temp, UL 94V-0, green	
2	End terminal	silver clad copper alloy	5 microinches min. gold
3	Center terminal	copper alloy	5 microinches min. gold
4	Rocker contact	silver clad copper alloy	5 microinches min. gold
5	Actuator	Phenol resin, UL94 HB, black	
6	Plunger	stainless steel	
7	Spring	music wire	
8	Toggle	brass	chrome or nickel
9	Retainer	Polyamide, UL94 HB, black	
10	Frame	cold rolled steel	zinc or nickel
11	Bushing	brass	100 microinches min. nickel over 10 microinches min. copper
12	Mounting nuts (2)	brass	200 microinches min. bright nickel
13	Locating ring	cold rolled steel	zinc or nickel
14	Internal tooth lockwasher	steel	zinc or nickel

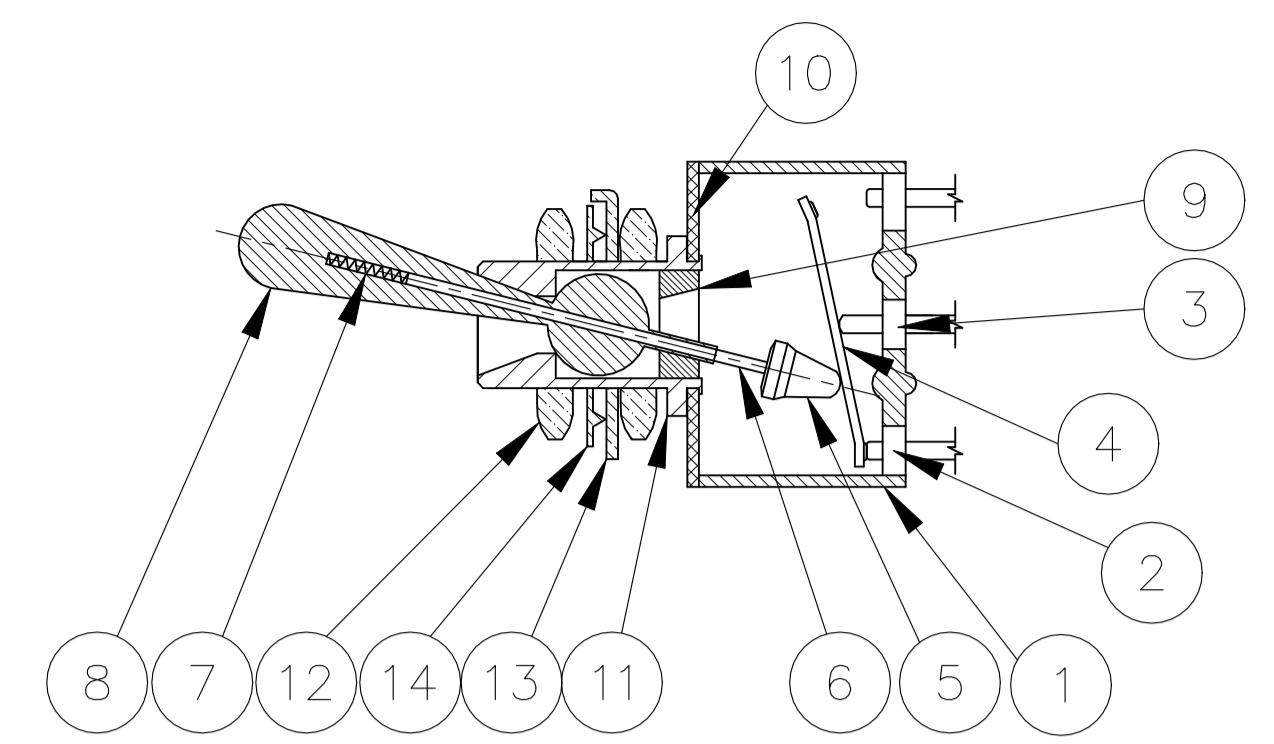

NOT TO SCALE

Specifications-see note 3				
<b>Current rating UL &amp; CSA</b>	6A @ 125 VAC (resistive)			
	3A @ 250 VAC (resistive)			
	4A @ 28 VDC (resistive)			
<b>Termination resistance</b>	20 milliohms max @ 2-4 VDC, 1A			
<b>Insulation resistance</b>	1,000 megohms min.			
<b>Withstanding voltage</b>	1,000 VAC			
<b>Travel</b>	24 +/-6 degrees			
<b>Actuation force</b>	.05 to 1.5 kgf			
<b>Operating temperature</b>	-20C to +85C			
<b>Storage temperature</b>	-40C to +85C			
<b>Contact timing</b>	break before make			
<b>Terminal seal</b>	epoxy or insert molded			
<b>Durability</b>	<b>Parameter</b>	<b>2 Position</b>	<b>3 Position</b>	<b>Momentary</b>
	mechanical (no load)	150,000	100,000	80,000
	250 VAC (3A resistive)	80,000	60,000	60,000
	125 VAC (6A resistive)	80,000	60,000	60,000
	28 VDC (4A resistive)	60,000	50,000	40,000

Part Number	Alco Model	Poles	Throws	Function	Terminal	Diagram 1	Diagram 2	Diagram 3	Comments
4-1437558-8	MTA406PPC	4	2	ON OFF ON	PC	12 11 10			2-3, 5-6, 8-9, 11-12
4-1437558-7	MTA406PAPC	2	3	ON ON ON	PC		5-3, 11-9		5-6, 11-12
4-1437558-6	MTA406PA	2	3	ON ON ON	Wire lug		5-3, 11-9		5-6, 11-12
4-1437558-5	MTA406P	4	2	ON OFF ON	Wire lug		Off		2-3, 5-6, 8-9, 11-12
4-1437558-4	MTA406NPC	4	2	ON ON	PC		---		2-3, 5-6, 8-9, 11-12
4-1437558-3	MTA406N	4	2	ON ON	Wire lug		---		2-3, 5-6, 8-9, 11-12
4-1437558-2	MTA306HPC	3	2	ON OFF(ON)	PC		Off		2-3, 5-6, 8-9
4-1437558-1	MTA306H	3	2	ON OFF(ON)	Wire lug		Off		2-3, 5-6, 8-9
4-1437558-0	MTA306FPC	3	2	ON (ON)	PC		---		2-3, 5-6, 8-9
3-1437558-9	MTA306F	3	2	ON (ON)	Wire lug		---		2-3, 5-6, 8-9
3-1437558-8	MTA306EPC	3	2	ON OFF ON	PC		Off		2-3, 5-6, 8-9
3-1437558-7	MTA306E	3	2	ON OFF ON	Wire lug		Off		2-3, 5-6, 8-9
3-1437558-6	MTA306DPC	3	2	ON ON	PC		---		2-3, 5-6, 8-9
3-1437558-5	MTA306D	3	2	ON ON	Wire lug		---		2-3, 5-6, 8-9
3-1437558-4	MTA206TPC	2	2	ON OFF(ON)	PC		OFF		2-3, 5-6
3-1437558-3	MTA206TA	1	3	ON ON (ON)	Wire lug		5-3		5-6
3-1437558-2	MTA206T	2	2	ON OFF(ON)	Wire lug		OFF		2-3, 5-6
3-1437558-1	MTA206SPC	2	2	(ON) OFF (ON)	PC		OFF		2-3, 5-6
3-1437558-0	MTA206SA	1	3	(ON) ON (ON)	Wire lug		5-3		5-6
2-1437558-9	MTA206S	2	2	(ON) OFF (ON)	Wire lug		OFF		2-3, 5-6
2-1437558-8	MTA206RPC	2	2	ON (ON)	PC		---		2-3, 5-6
2-1437558-7	MTA206R	2	2	ON (ON)	Wire lug		---		2-3, 5-6
2-1437558-5	MTA206PPC	2	2	ON OFF ON	PC		OFF		2-3, 5-6
2-1437558-4	MTA206PAPC	1	3	ON ON ON	PC		5-3		5-6
2-1437558-3	MTA206PA	1	3	ON ON ON	Wire lug		5-3		5-6
2-1437558-2	MTA206P	2	2	ON OFF ON	Wire lug		OFF		2-3, 5-6
2-1437558-1	MTA206NPC	2	2	ON ON	PC		---		2-3, 5-6
2-1437558-0	MTA206N	2	2	ON ON	Wire lug		---		2-3, 5-6
1-1437558-9	MTA106HPC	1	2	ON OFF(ON)	PC		OFF		2-3
1-1437558-8	MTA106H	1	2	ON OFF(ON)	Wire lug		OFF		2-3
1-1437558-7	MTA106GPC	1	2	(ON) OFF (ON)	PC		OFF		2-3
1-1437558-6	MTA106G	1	2	(ON) OFF (ON)	Wire lug		OFF		2-3
1-1437558-5	MTA106FPC	1	2	ON (ON)	PC		---		2-3
1-1437558-4	MTA106F	1	2	ON (ON)	Wire lug		---		2-3
1-1437558-3	MTA106EPC	1	2	ON OFF ON	PC		Off		2-3
1-1437558-2	MTA106E	1	2	ON OFF ON	Wire lug		Off		2-3
1-1437558-1	MTA106DPC	1	2	ON ON	PC		---		2-3
1571616-1	MTA106DUL	1	2	ON ON	Wire lug		---		2-3
1-1437558-0	MTA106D	1	2	ON ON	Wire lug		---		2-3

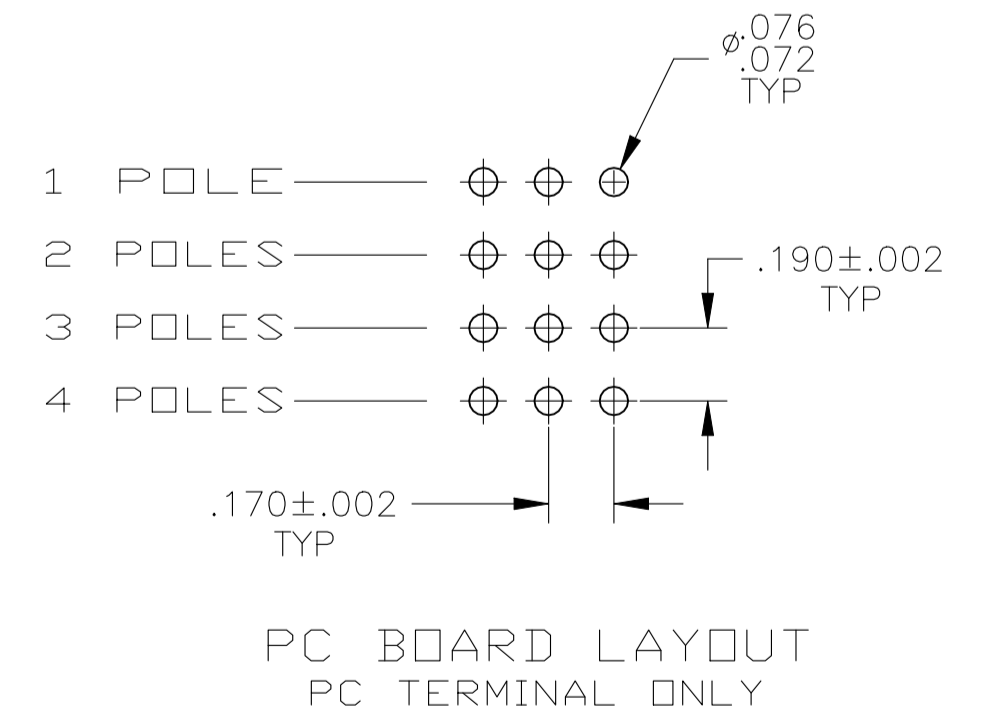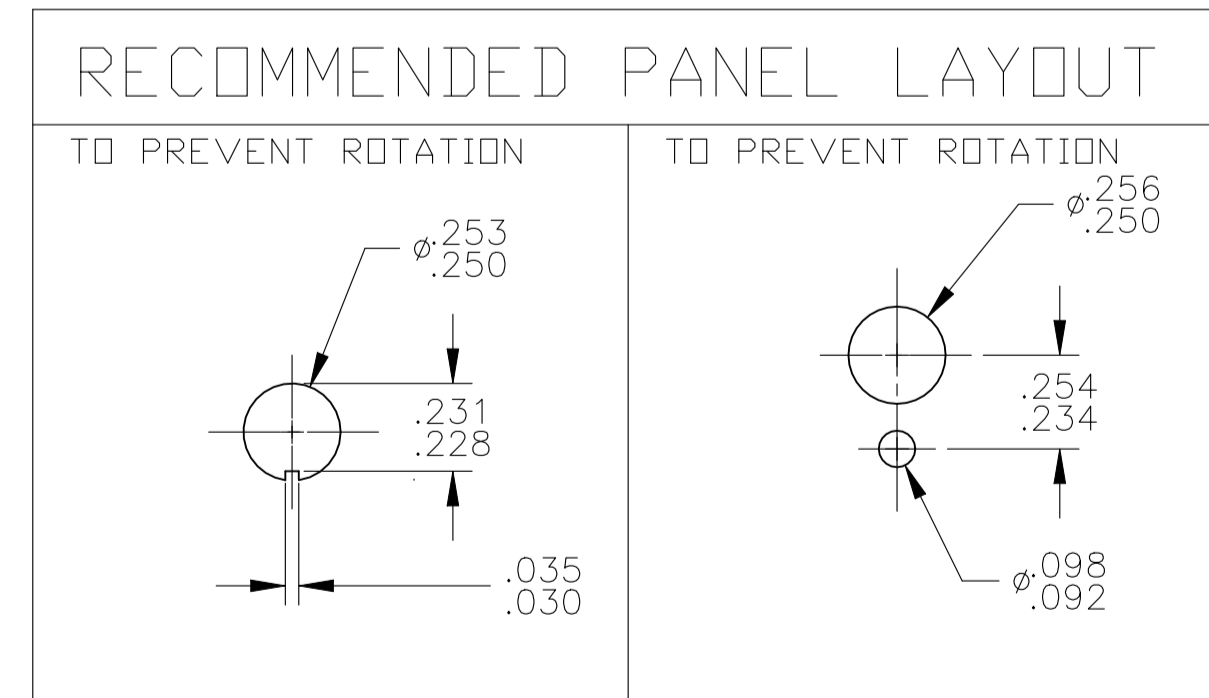

- NOTES:
1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.
  2. EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:
    - (2) 1/4-40 UNS-2B HEX NUTS
    - (1) INTERNAL TOOTH LOCKWASHER
    - (1) LOCATING RING

5. WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES.
6. CUSTOMER INSTALLED EXTERNAL JUMPER BETWEEN TERMINALS 2 AND 4 REQUIRED FOR 1 POLE 3 THROW FUNCTION.
7. CUSTOMER INSTALLED EXTERNAL JUMPERS BETWEEN TERMINALS 2 AND 4 AS WELL AS 8 AND 10 REQUIRED FOR 2 POLE 3 THROW FUNCTION.

- ⚠ OBSOLETE  
9. LASER MARKING USED FOR PARTS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0. PLC ± .005	1. PLC ± .005	2. PLC ± .005	3. PLC ± .005	4. PLC ± .005	ANGLES ± .5°
--------------------	----------------------------------------	---------------	---------------	---------------	---------------	---------------	--------------

MATERIAL: - FINISH: -

APPROVED: M. ZITTO

DATE: 29DEC03


NAME: TOGGLE SWITCH, MTA SERIES VERTICAL MOUNT

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 1-1437558-0

RESTRICTED TO: -


CUSTOMER DRAWING SCALE: 2:1 SHEET: 1 OF 3 REV: E5

REVISIONS					
P	LTR	DESCRIPTION	DATE	BYN	APVD
-	-	SEE SHEET 1	-	-	-

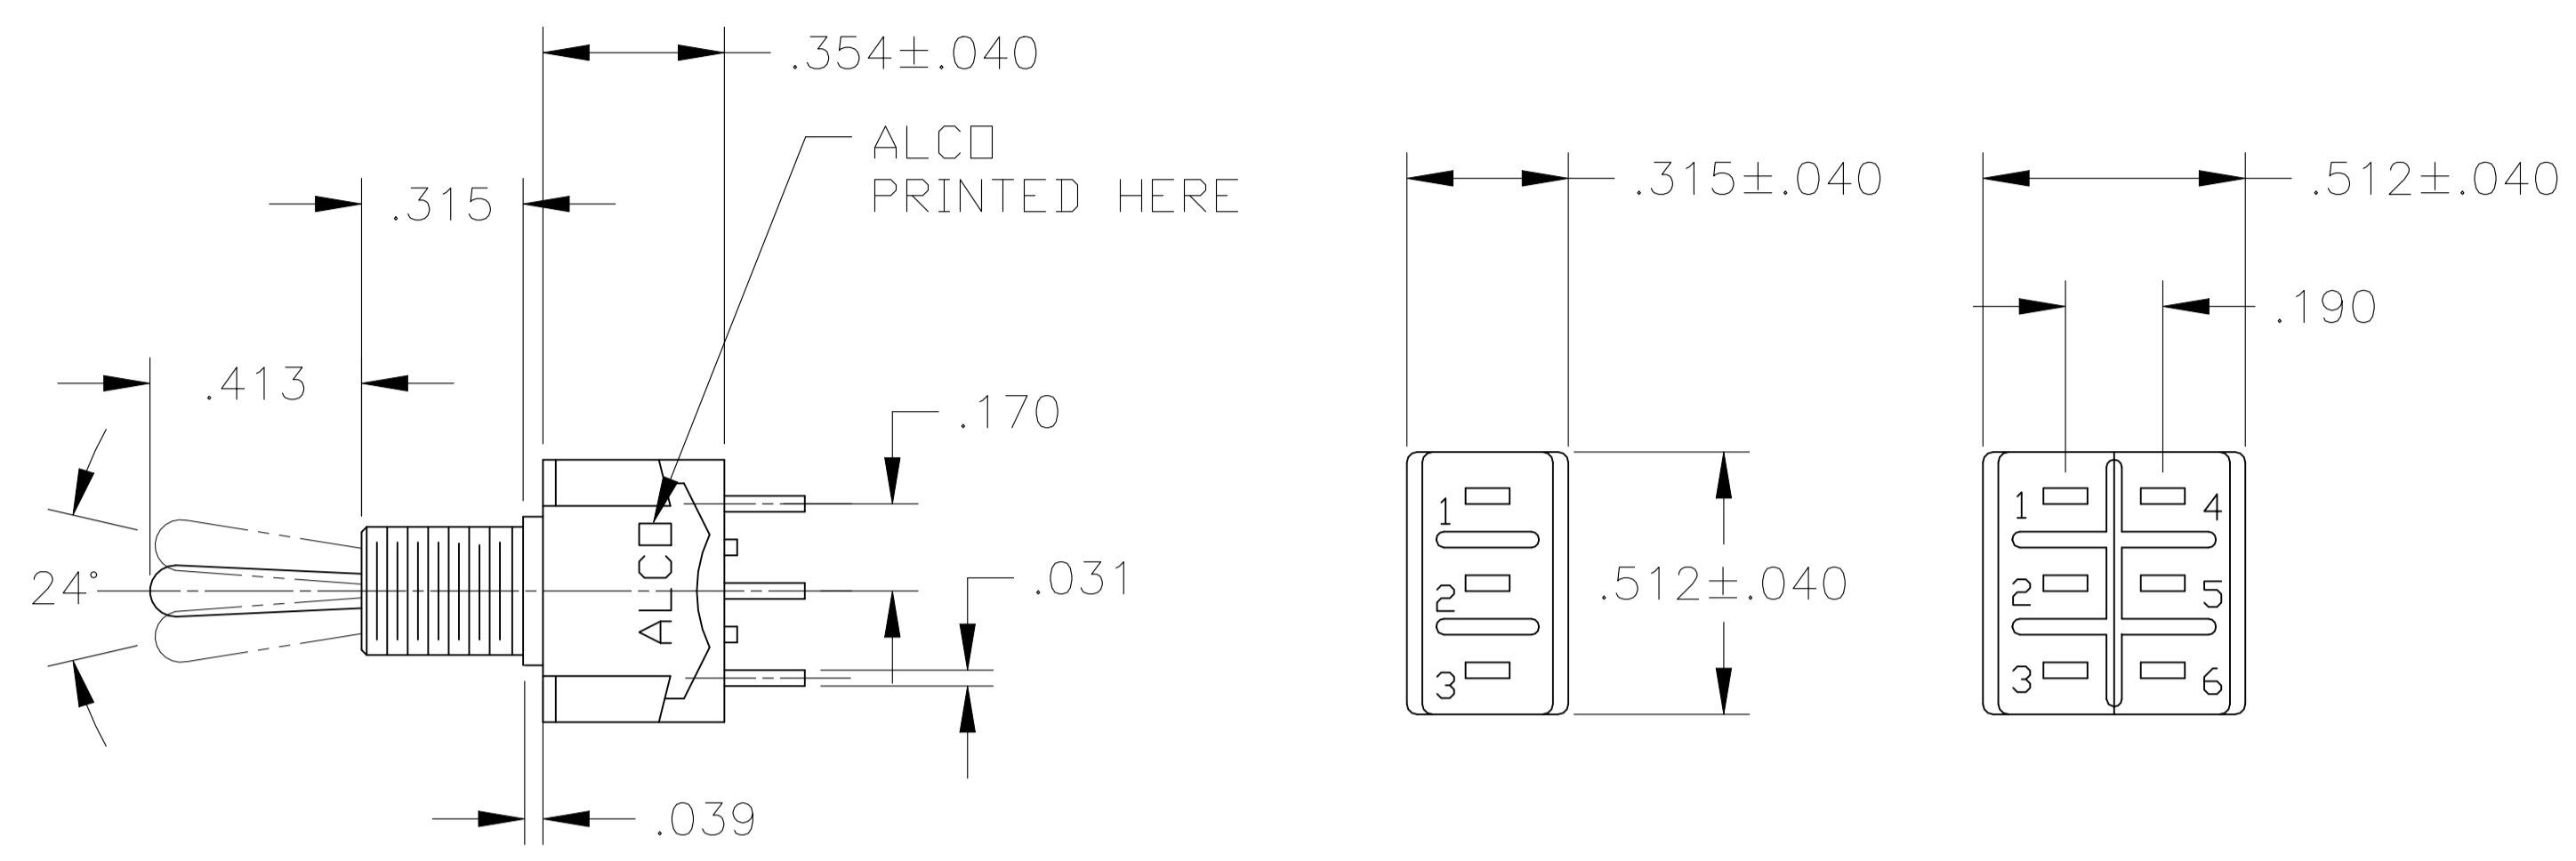


MTA-106

MTA-206

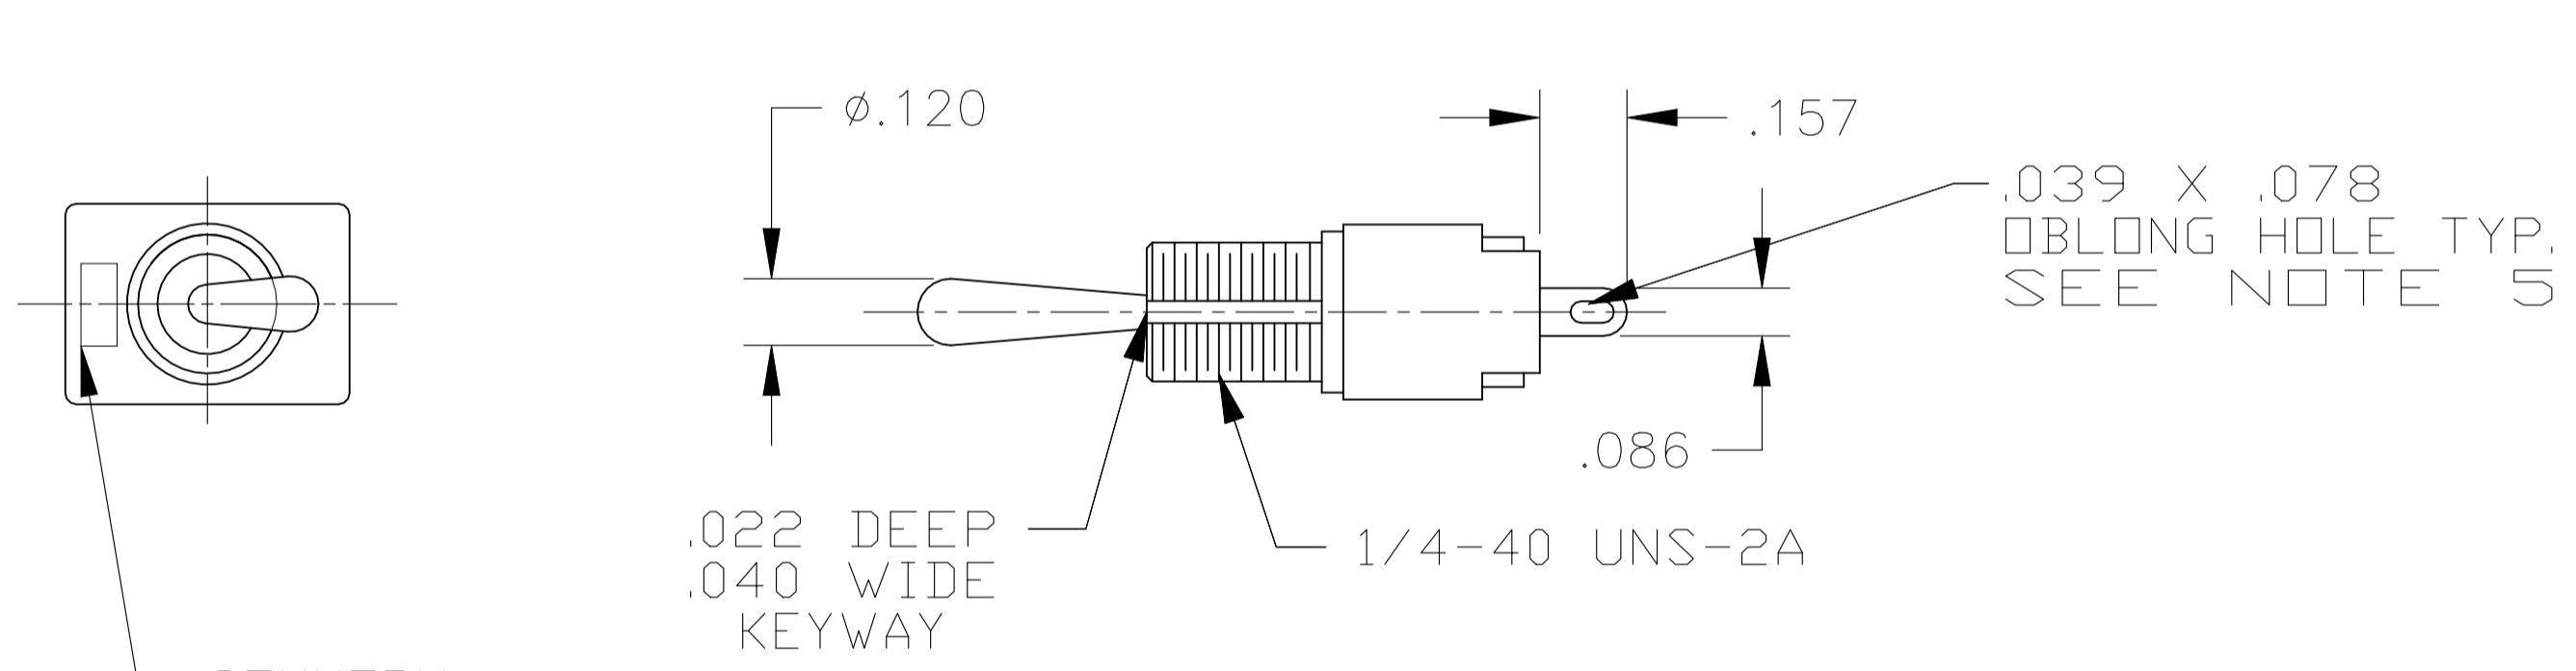


WIRE LUG TERMINAL

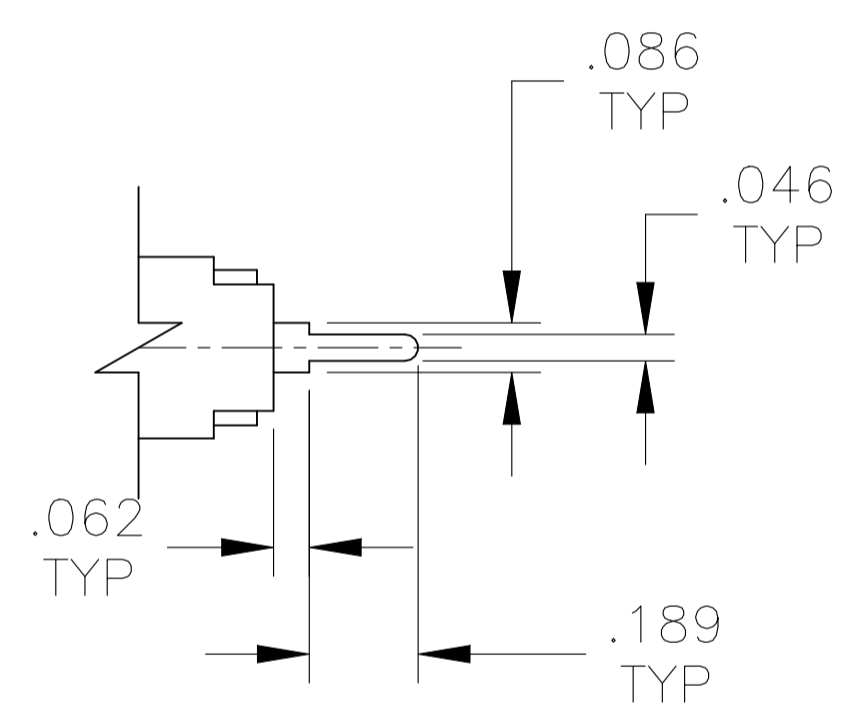

PC TERMINAL

COUNTRY OF ORIGIN STAMPED HERE EXISTING SWITCHES ONLY




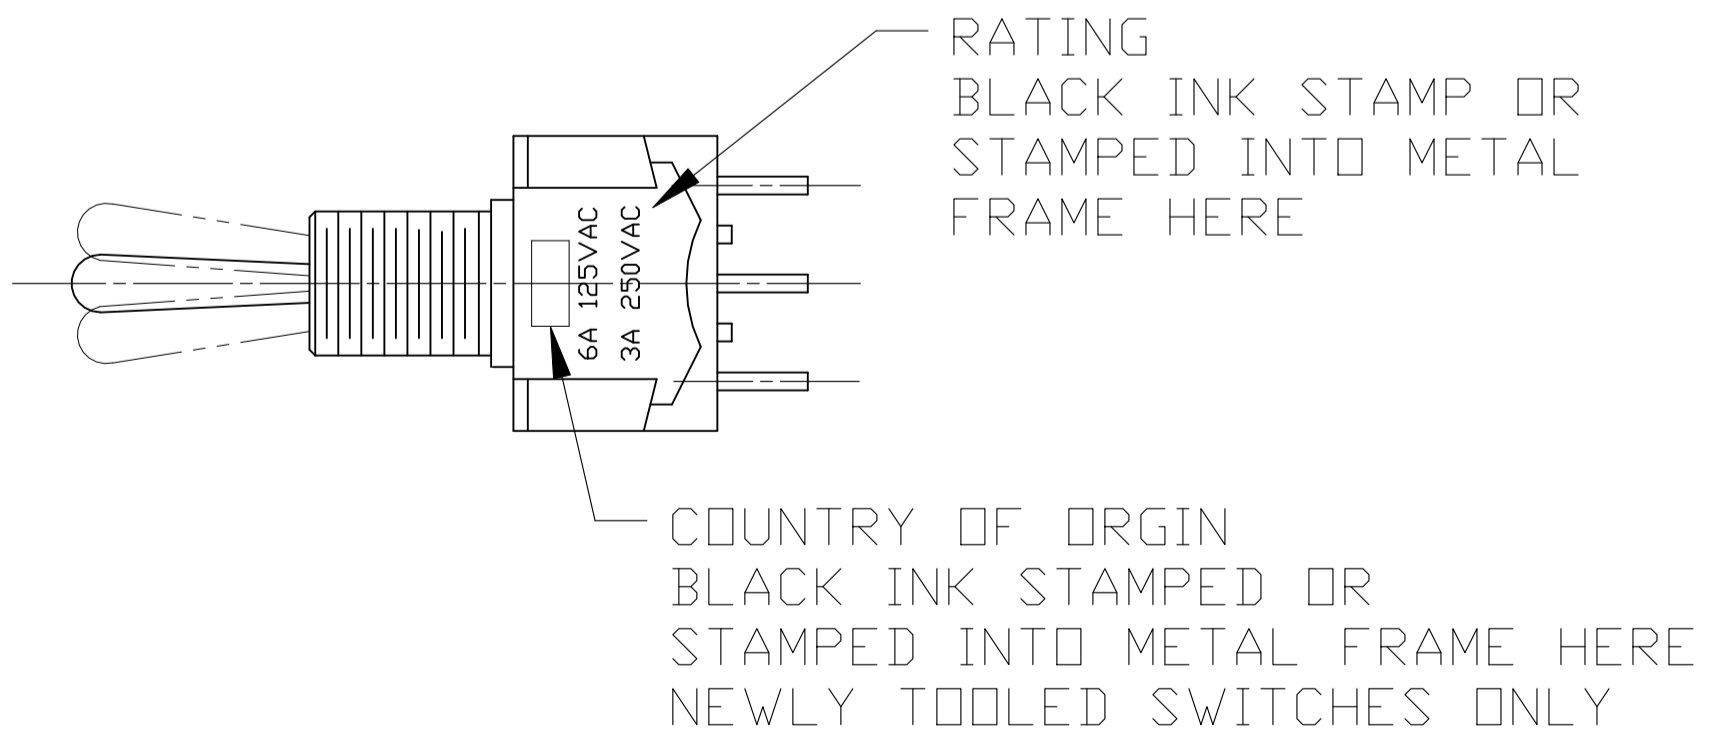


RATING BLACK INK STAMP OR STAMPED INTO METAL FRAME HERE


COUNTRY OF ORIGIN BLACK INK STAMPED OR STAMPED INTO METAL FRAME HERE NEWLY TOOLED SWITCHES ONLY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN M. BINNER 29DEC03	TE Connectivity Ltd.												
DIMENSIONS: INCHES		CHK M. ZITTO 29DEC03													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. ZITTO 29DEC03	NAME TOGGLE SWITCH, MTA SERIES VERTICAL MOUNT												
<table border="1"> <tr> <td>0. PLC</td> <td>± .005</td> </tr> <tr> <td>1. PLC</td> <td>± .005</td> </tr> <tr> <td>2. PLC</td> <td>± .005</td> </tr> <tr> <td>3. PLC</td> <td>± .005</td> </tr> <tr> <td>4. PLC</td> <td>± .005</td> </tr> <tr> <td>ANGLES</td> <td>± .005</td> </tr> </table>		0. PLC	± .005	1. PLC	± .005	2. PLC	± .005	3. PLC	± .005	4. PLC	± .005	ANGLES	± .005	PRODUCT SPEC	APPLICATION SPEC
0. PLC	± .005														
1. PLC	± .005														
2. PLC	± .005														
3. PLC	± .005														
4. PLC	± .005														
ANGLES	± .005														
MATERIAL	FINISH	WEIGHT	RESTRICTED TO												
CUSTOMER DRAWING		SIZE A1	SCALE 1:1												
		CAGE CODE 00779	DRAWING NO. 1-1437558-0												
		SHEET 2	OF 3												
		REV E5													


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
-	-	SEE SHEET 1	-	-

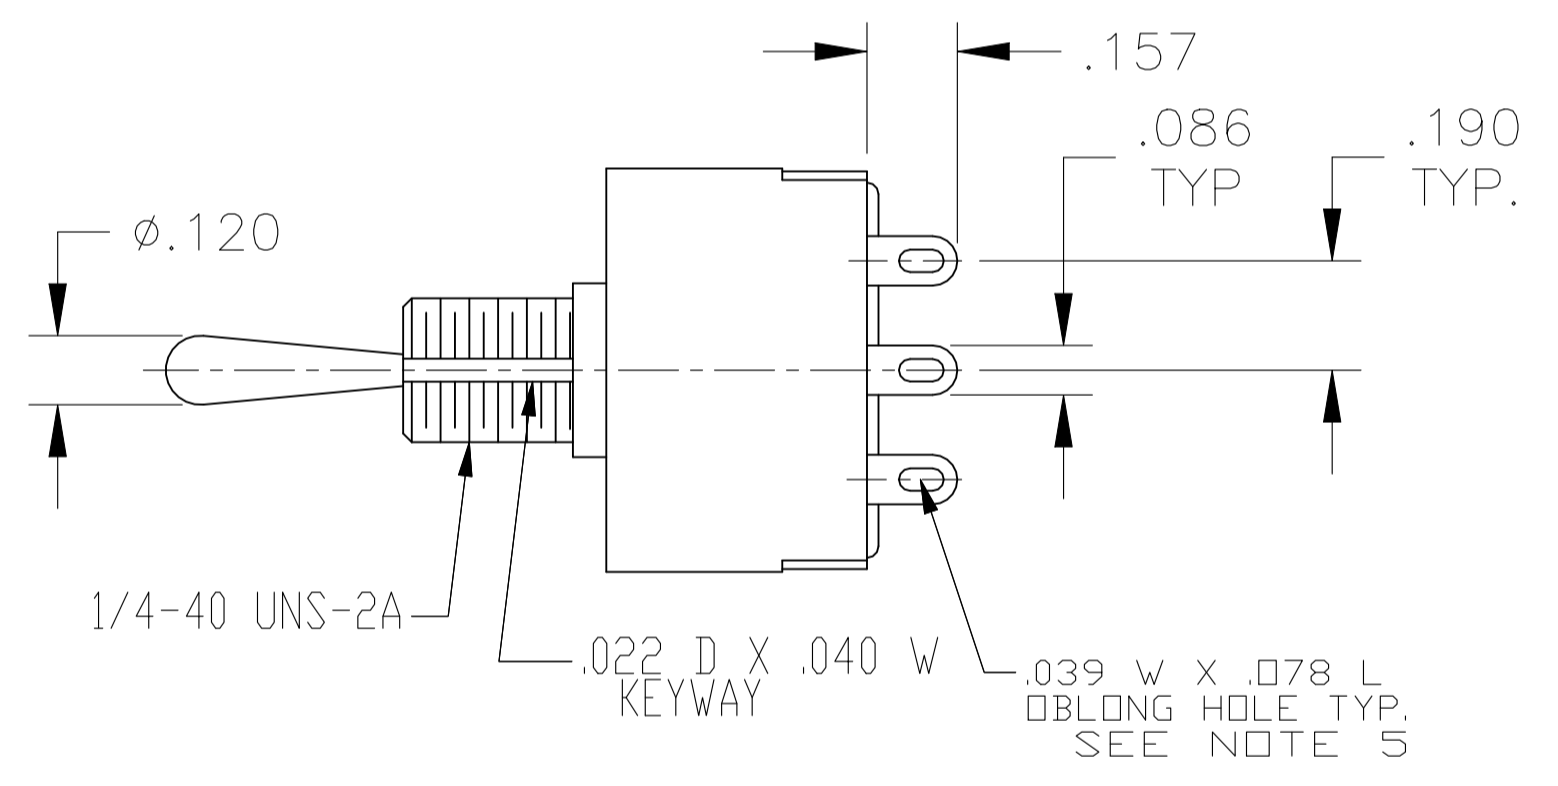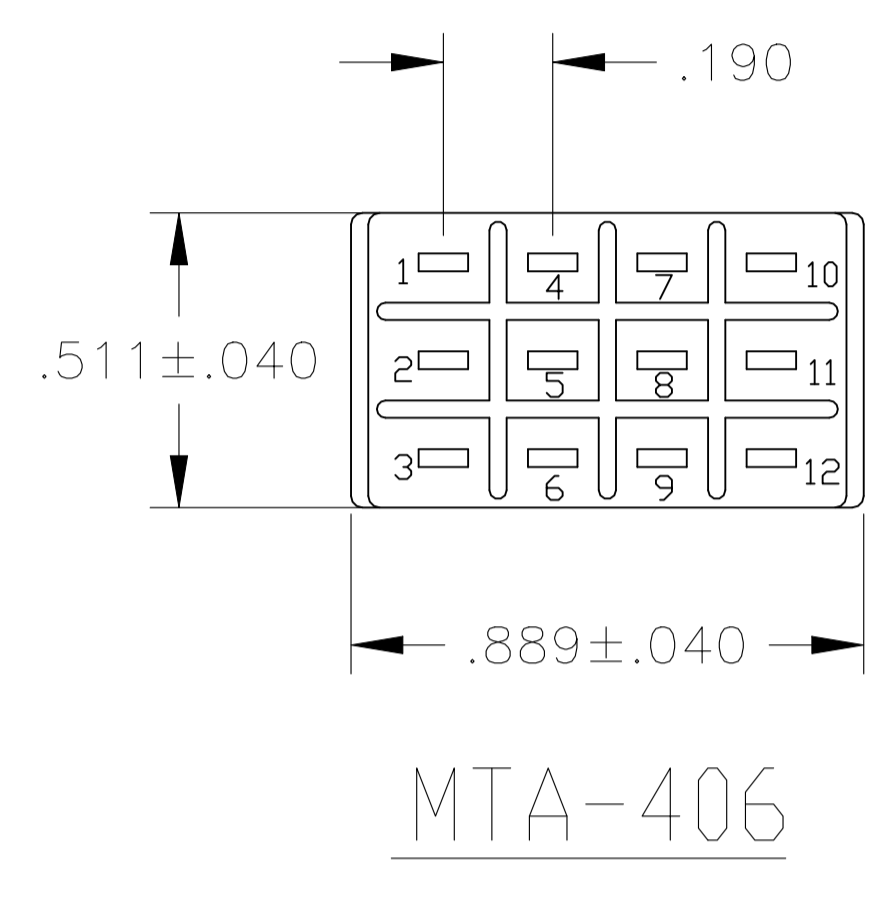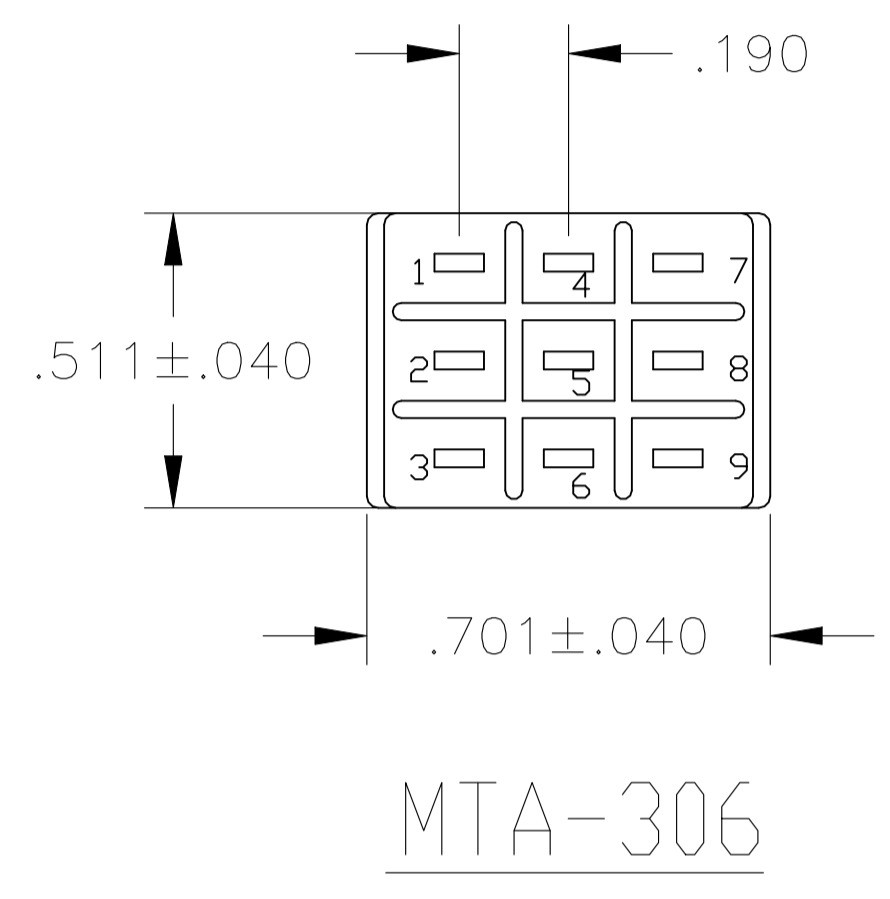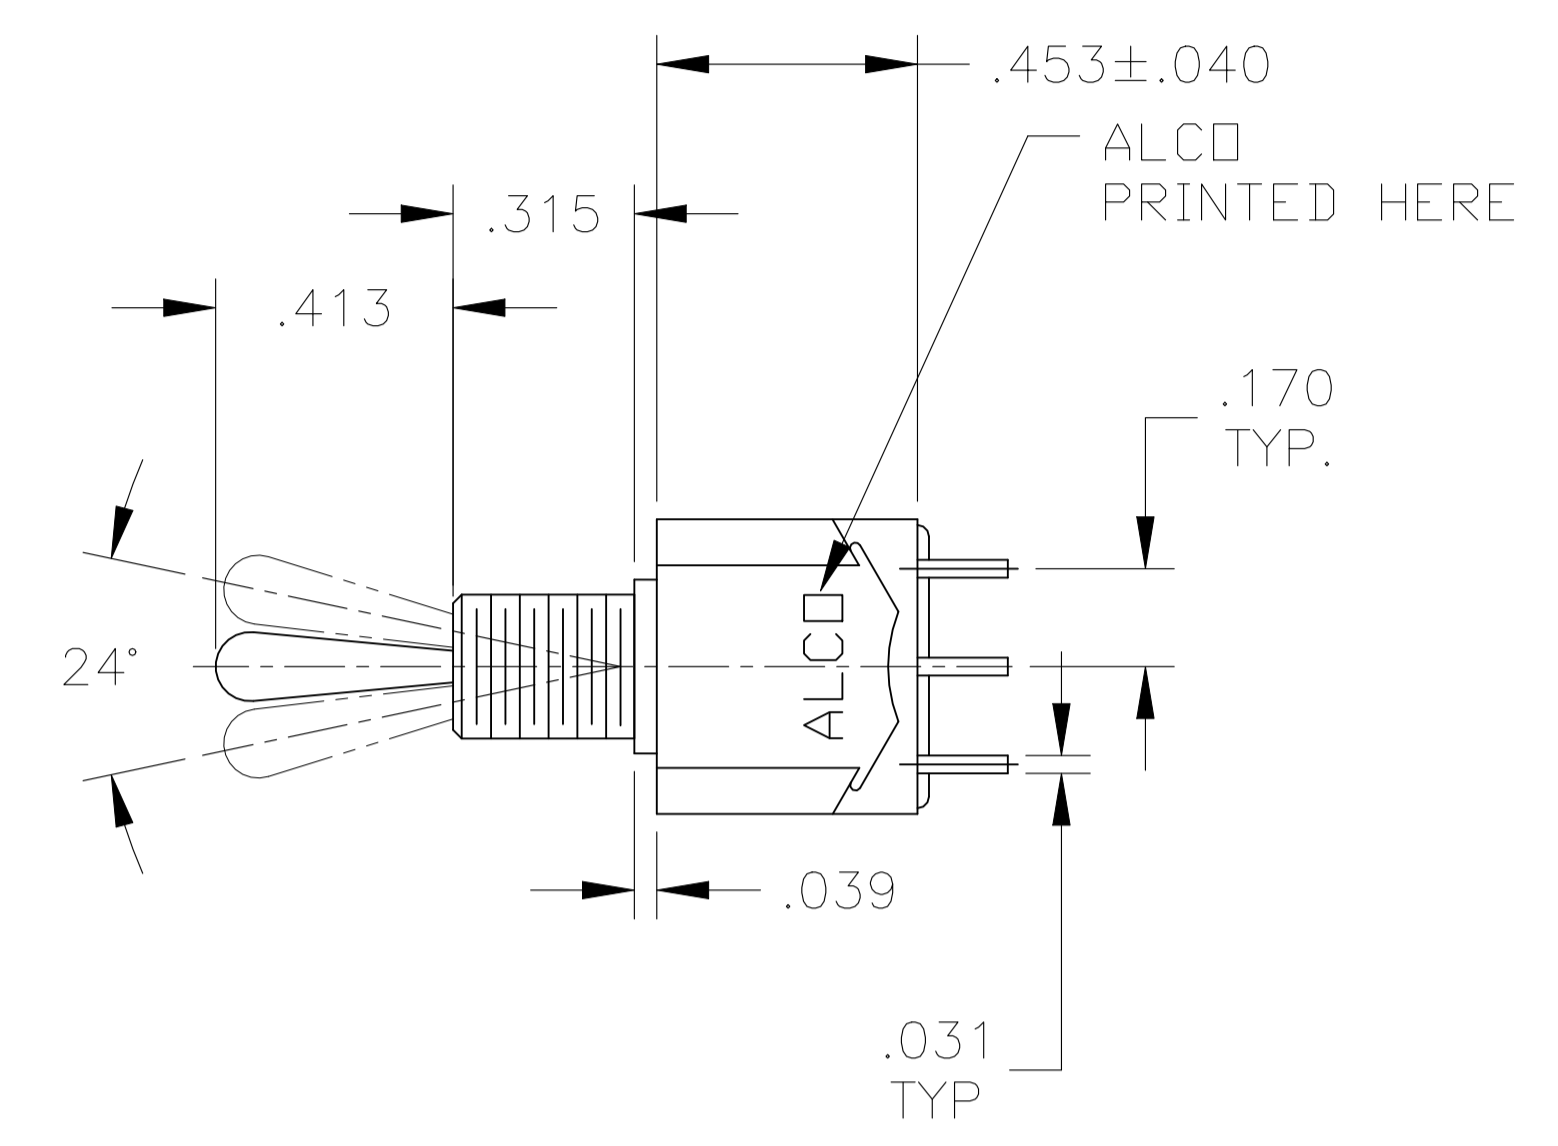

WIRE LUG TERMINAL

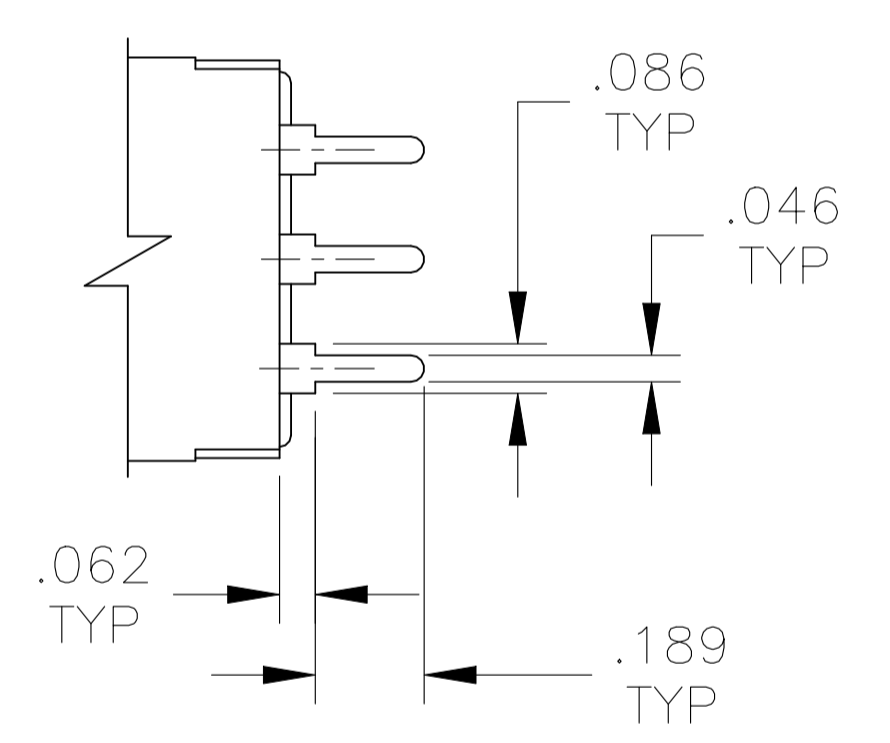

PC TERMINAL

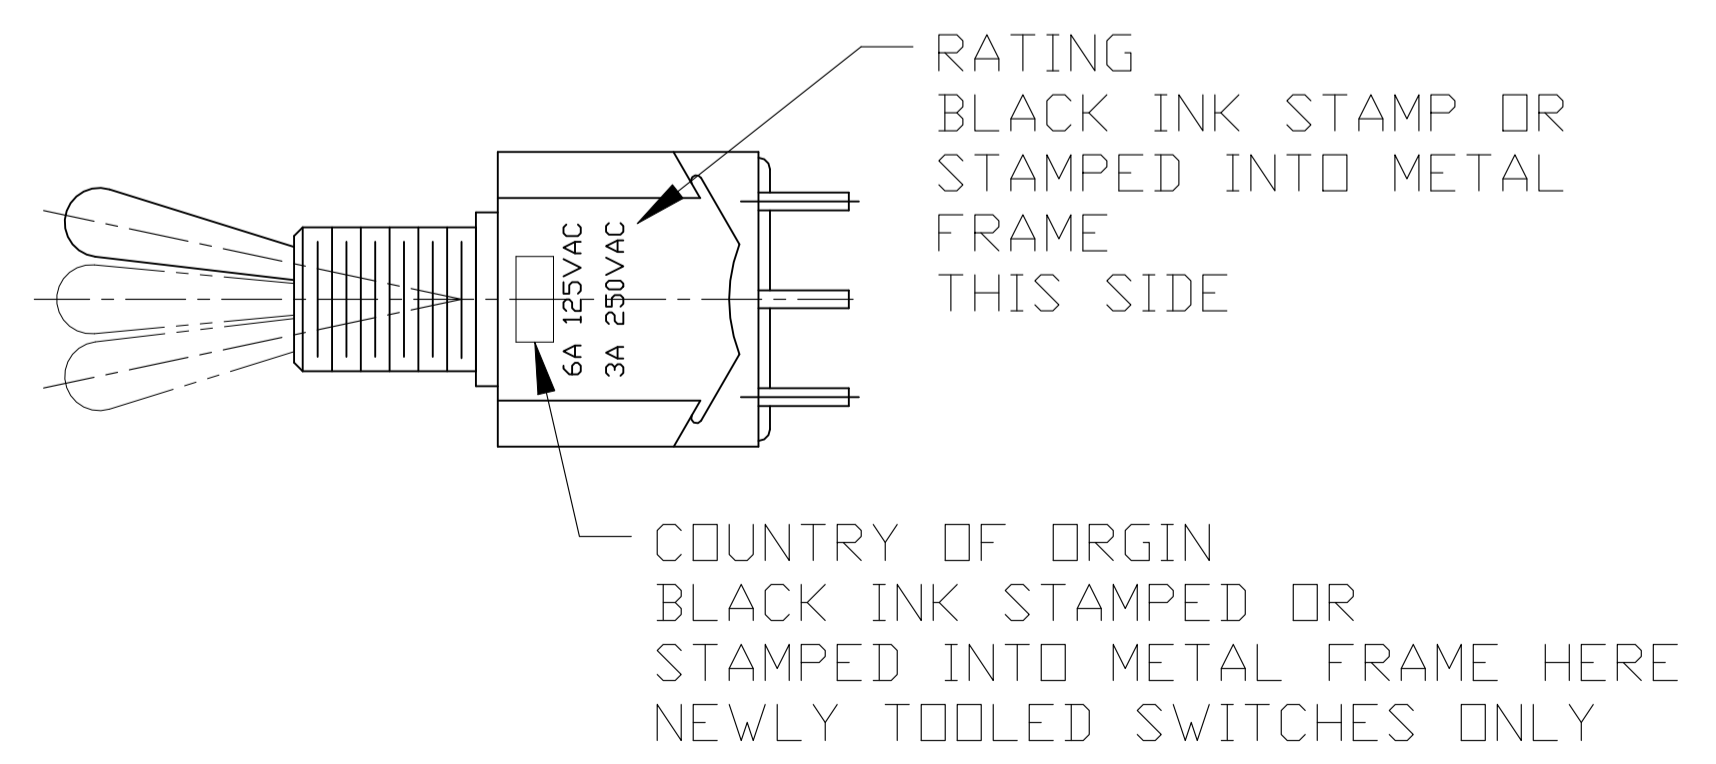

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN M. BINNER 29DEC03	
DIMENSIONS: INCHES		CHK M. ZITTO 29DEC03	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD M. ZITTO 29DEC03	NAME TOGGLE SWITCH, MTA SERIES VERTICAL MOUNT
0. PLC ± -	1. PLC ± -	PRODUCT SPEC	APPLICATION SPEC
2. PLC ± -	3. PLC ± .005	ANGLE	ANGLE
4. PLC ± -	ANGLES ± -	SIZE	CAGE CODE
MATERIAL	FINISH	WEIGHT	DRAWING NO.
CUSTOMER DRAWING		A1 00779	1-1437558-0
SCALE 1:1		SHEET 3 OF 3	REV E5