
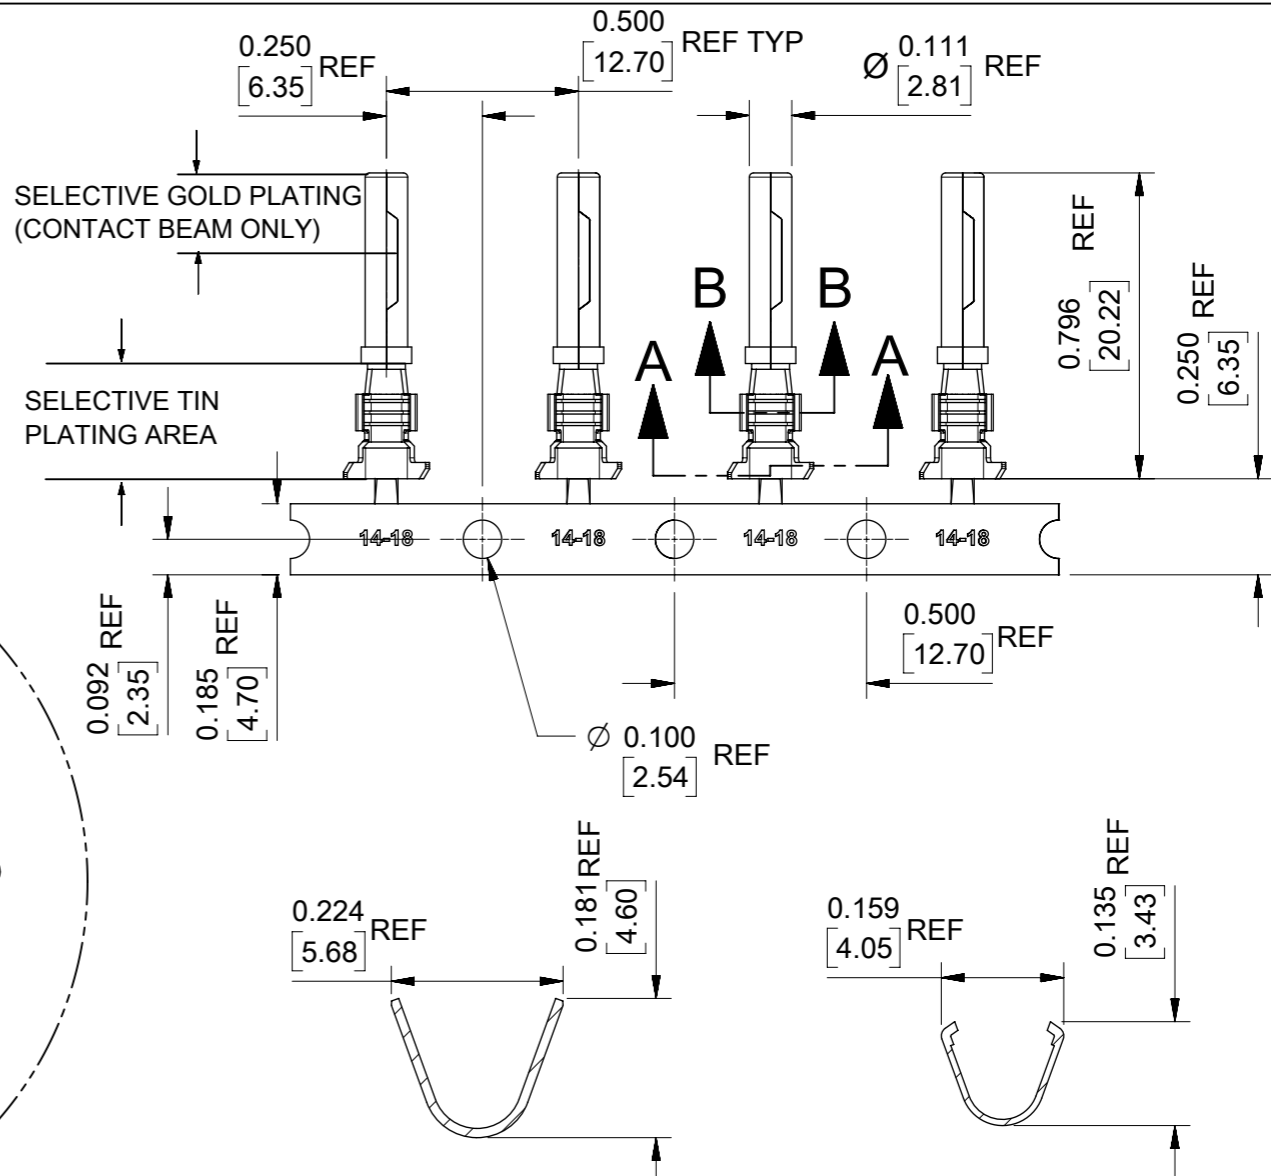


STRIP MATERIAL NUMBER	FINISH
84525-0025	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0046	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

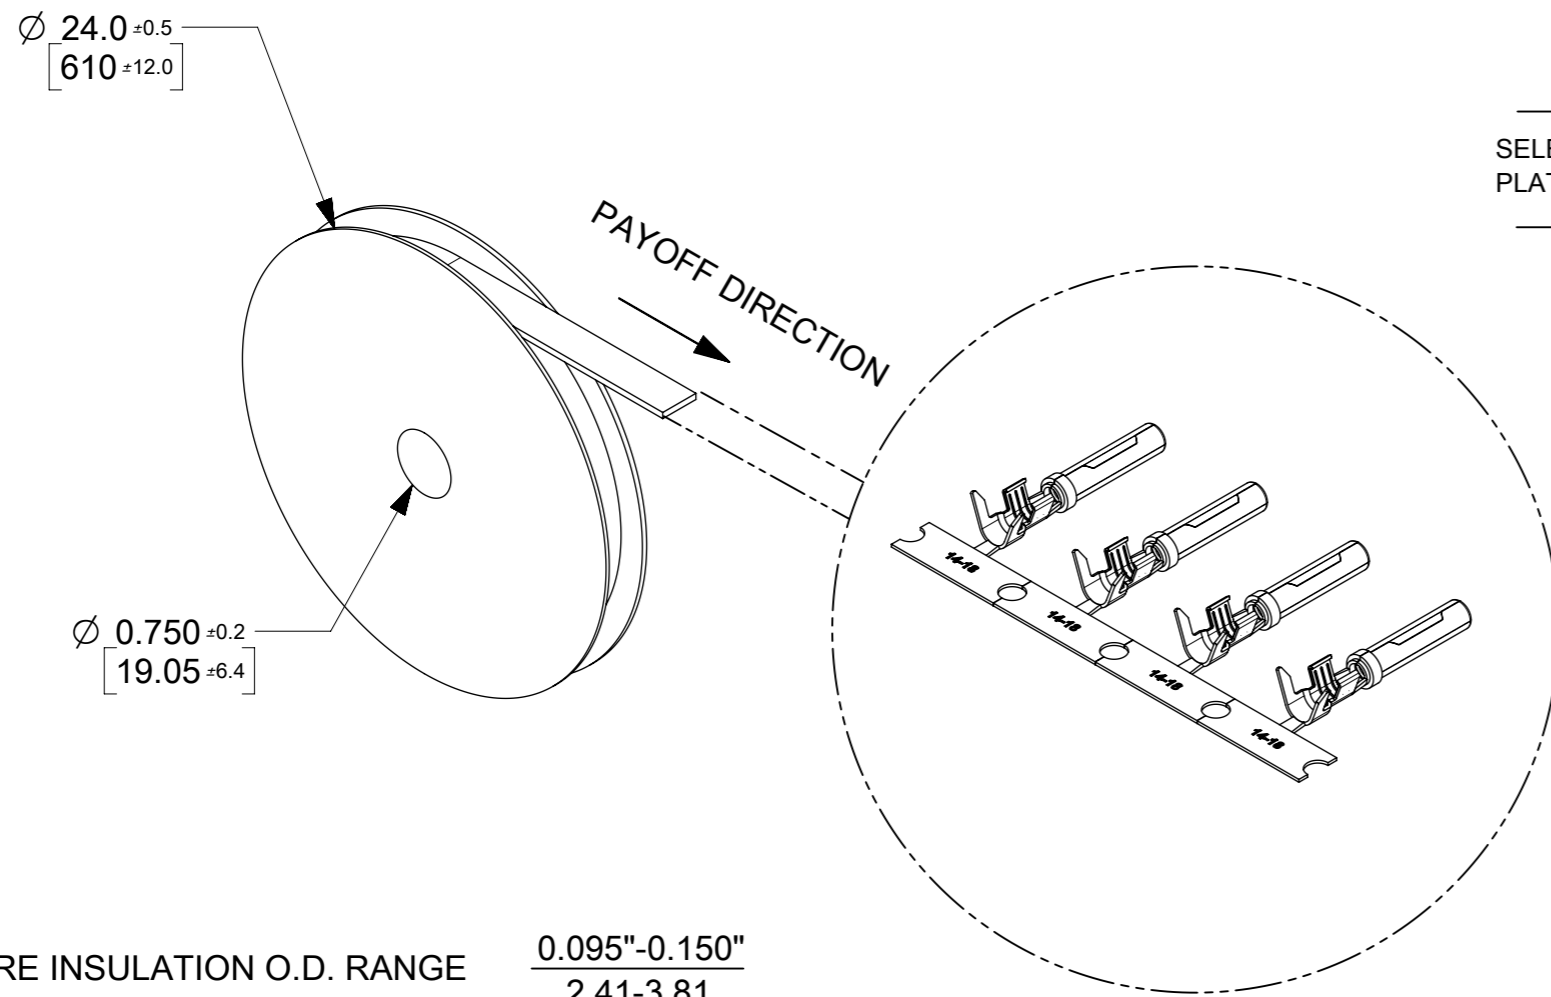

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

- NOTES:
1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK. FINISH: SEE CHART.
 2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE WITH SERIES XRC & ML-XT CONNECTOR ASSEMBLIES.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE LONG TEXT					
	DIMENSION UNITS	SCALE	EC NO: 168799					
▽ = 0	INCH/[mm]	2:1	DRWN: JFLETCHER 2017/11/21			XRC SOCKET W/SNAP WINDOW 14-18 AWG 0.095"-0.150" WIRE Ø		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: JDWALLACE 2018/02/12			PRODUCT CUSTOMER DRAWING		
▽ = 0	ANGULAR TOL ± 2.0°		APPR: JDWALLACE 2018/02/20			DOCUMENT NUMBER		
▽ = 0	4 PLACES ±		INITIAL REVISION:			845250070		
▽ = 0	3 PLACES ±		DRWN: JFLETCHER 2016/01/25			DOCS TYPE		
▽ = 0	2 PLACES ± 0.13		APPR: JALEXANDER 2016/02/23			PSD		
▽ = 0	1 PLACE ± 0.2		MATERIAL NUMBER			000		
▽ = 0	0 PLACES ±		CUSTOMER			000 B		
■ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES	
▽ = 0			A3-SIZE		84525		SHEET NUMBER	
			SEE CHART		GENERAL MARKET		1 OF 1	