


P.C.B LAYOUT

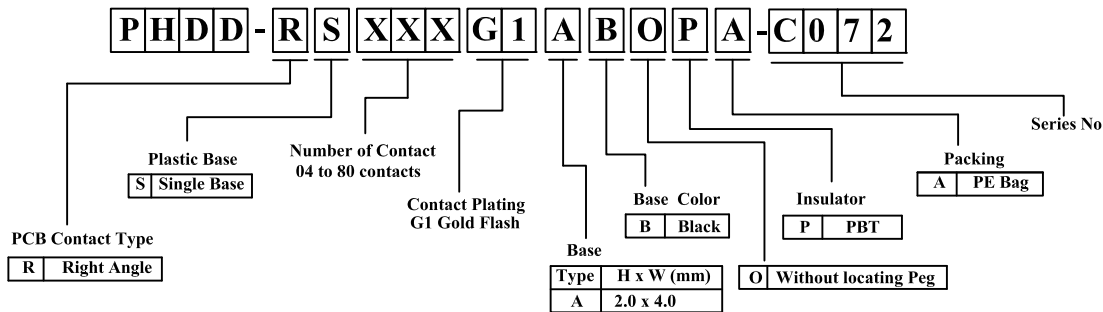

L=10.4/14.4mm

RoHS compliant

REV.	DESCRIPTION	DATE
A	New Drawing	2022/02/18


LTR	Part Name	Material	Description	QTY
1	Housing	PBT UL94V-0	200°C for 20 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
 Dielectric Withstanding Voltage : 500V AC/Min

Superior Tech Co., Ltd.




General Tolerance		TITLE		Pitch 2.0x2.0mm Pin Header ,Right Angle Dual Row	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Tom		02-18-22'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
Angle ± 5°				NO. 002	
				PART NO. PHDD-RSXXXG1ABOPA-C072	
				CUSTOMER NO. DK	

REV.	UNIT	SCALE
A	mm	1:1



(Q2-R03-01A) ST-R05-07

REV.	DESCRIPTION	DATE
A	New Drawing	2022/05/26

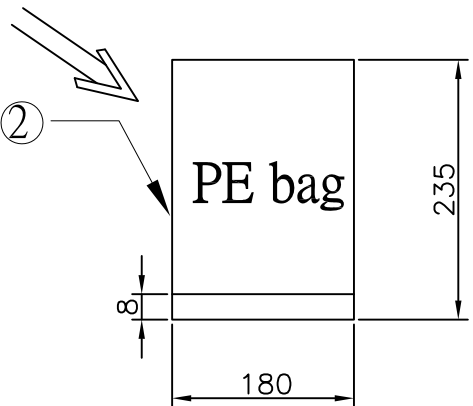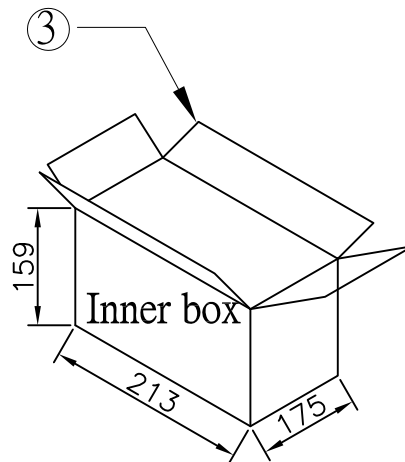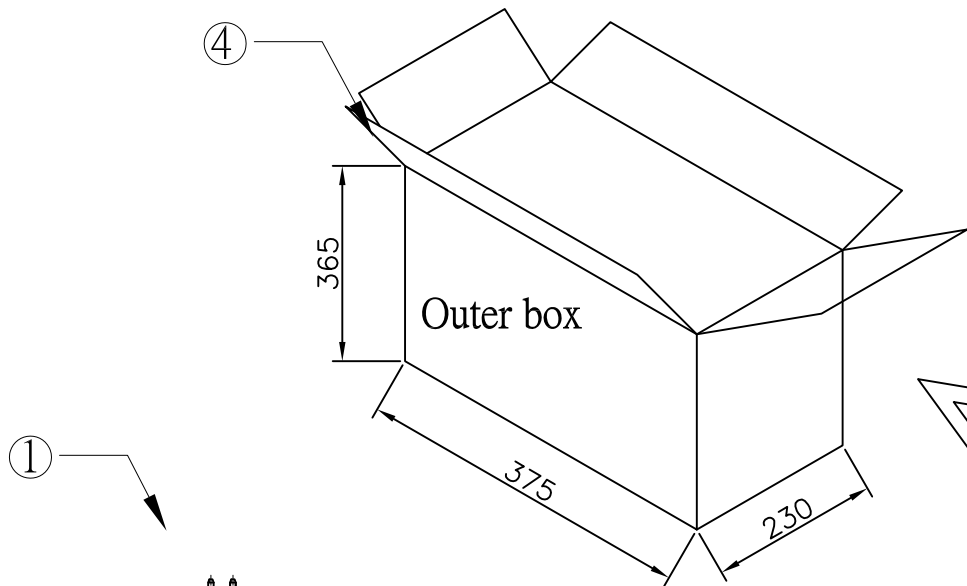

RoHS compliant

Note: The quantity is estimated, please refer to actual shipment.

④	Outer box	B-ZX-W-010-F001	1 PCS	20k PCS
③	Inner box	B-ZX-R-001-F001	4 PCS	5000 PCS
②	PE bag	B-PD-S-002-F001	20 PCS	1000 PCS
①	Product	PH2.0 2*XPIN	—	—
Serial number	Name	Specifications	Dosage of cladding material	Quantity installed

Superior Tech Co., Ltd.

General Tolerance		TITLE	PHDD-RSXXXG1ABOPA-C072_Packing	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Tom	2022/05/26	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	PHDD-RSXXXG1ABOPA-C072
Angle	± 5°			CUSTOMER NO.
				DK

REV.	UNIT	SCALE	
A	mm	1:10	