


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
G		REVISED PER ECR-13-001287	08FEB13	KH	TM		

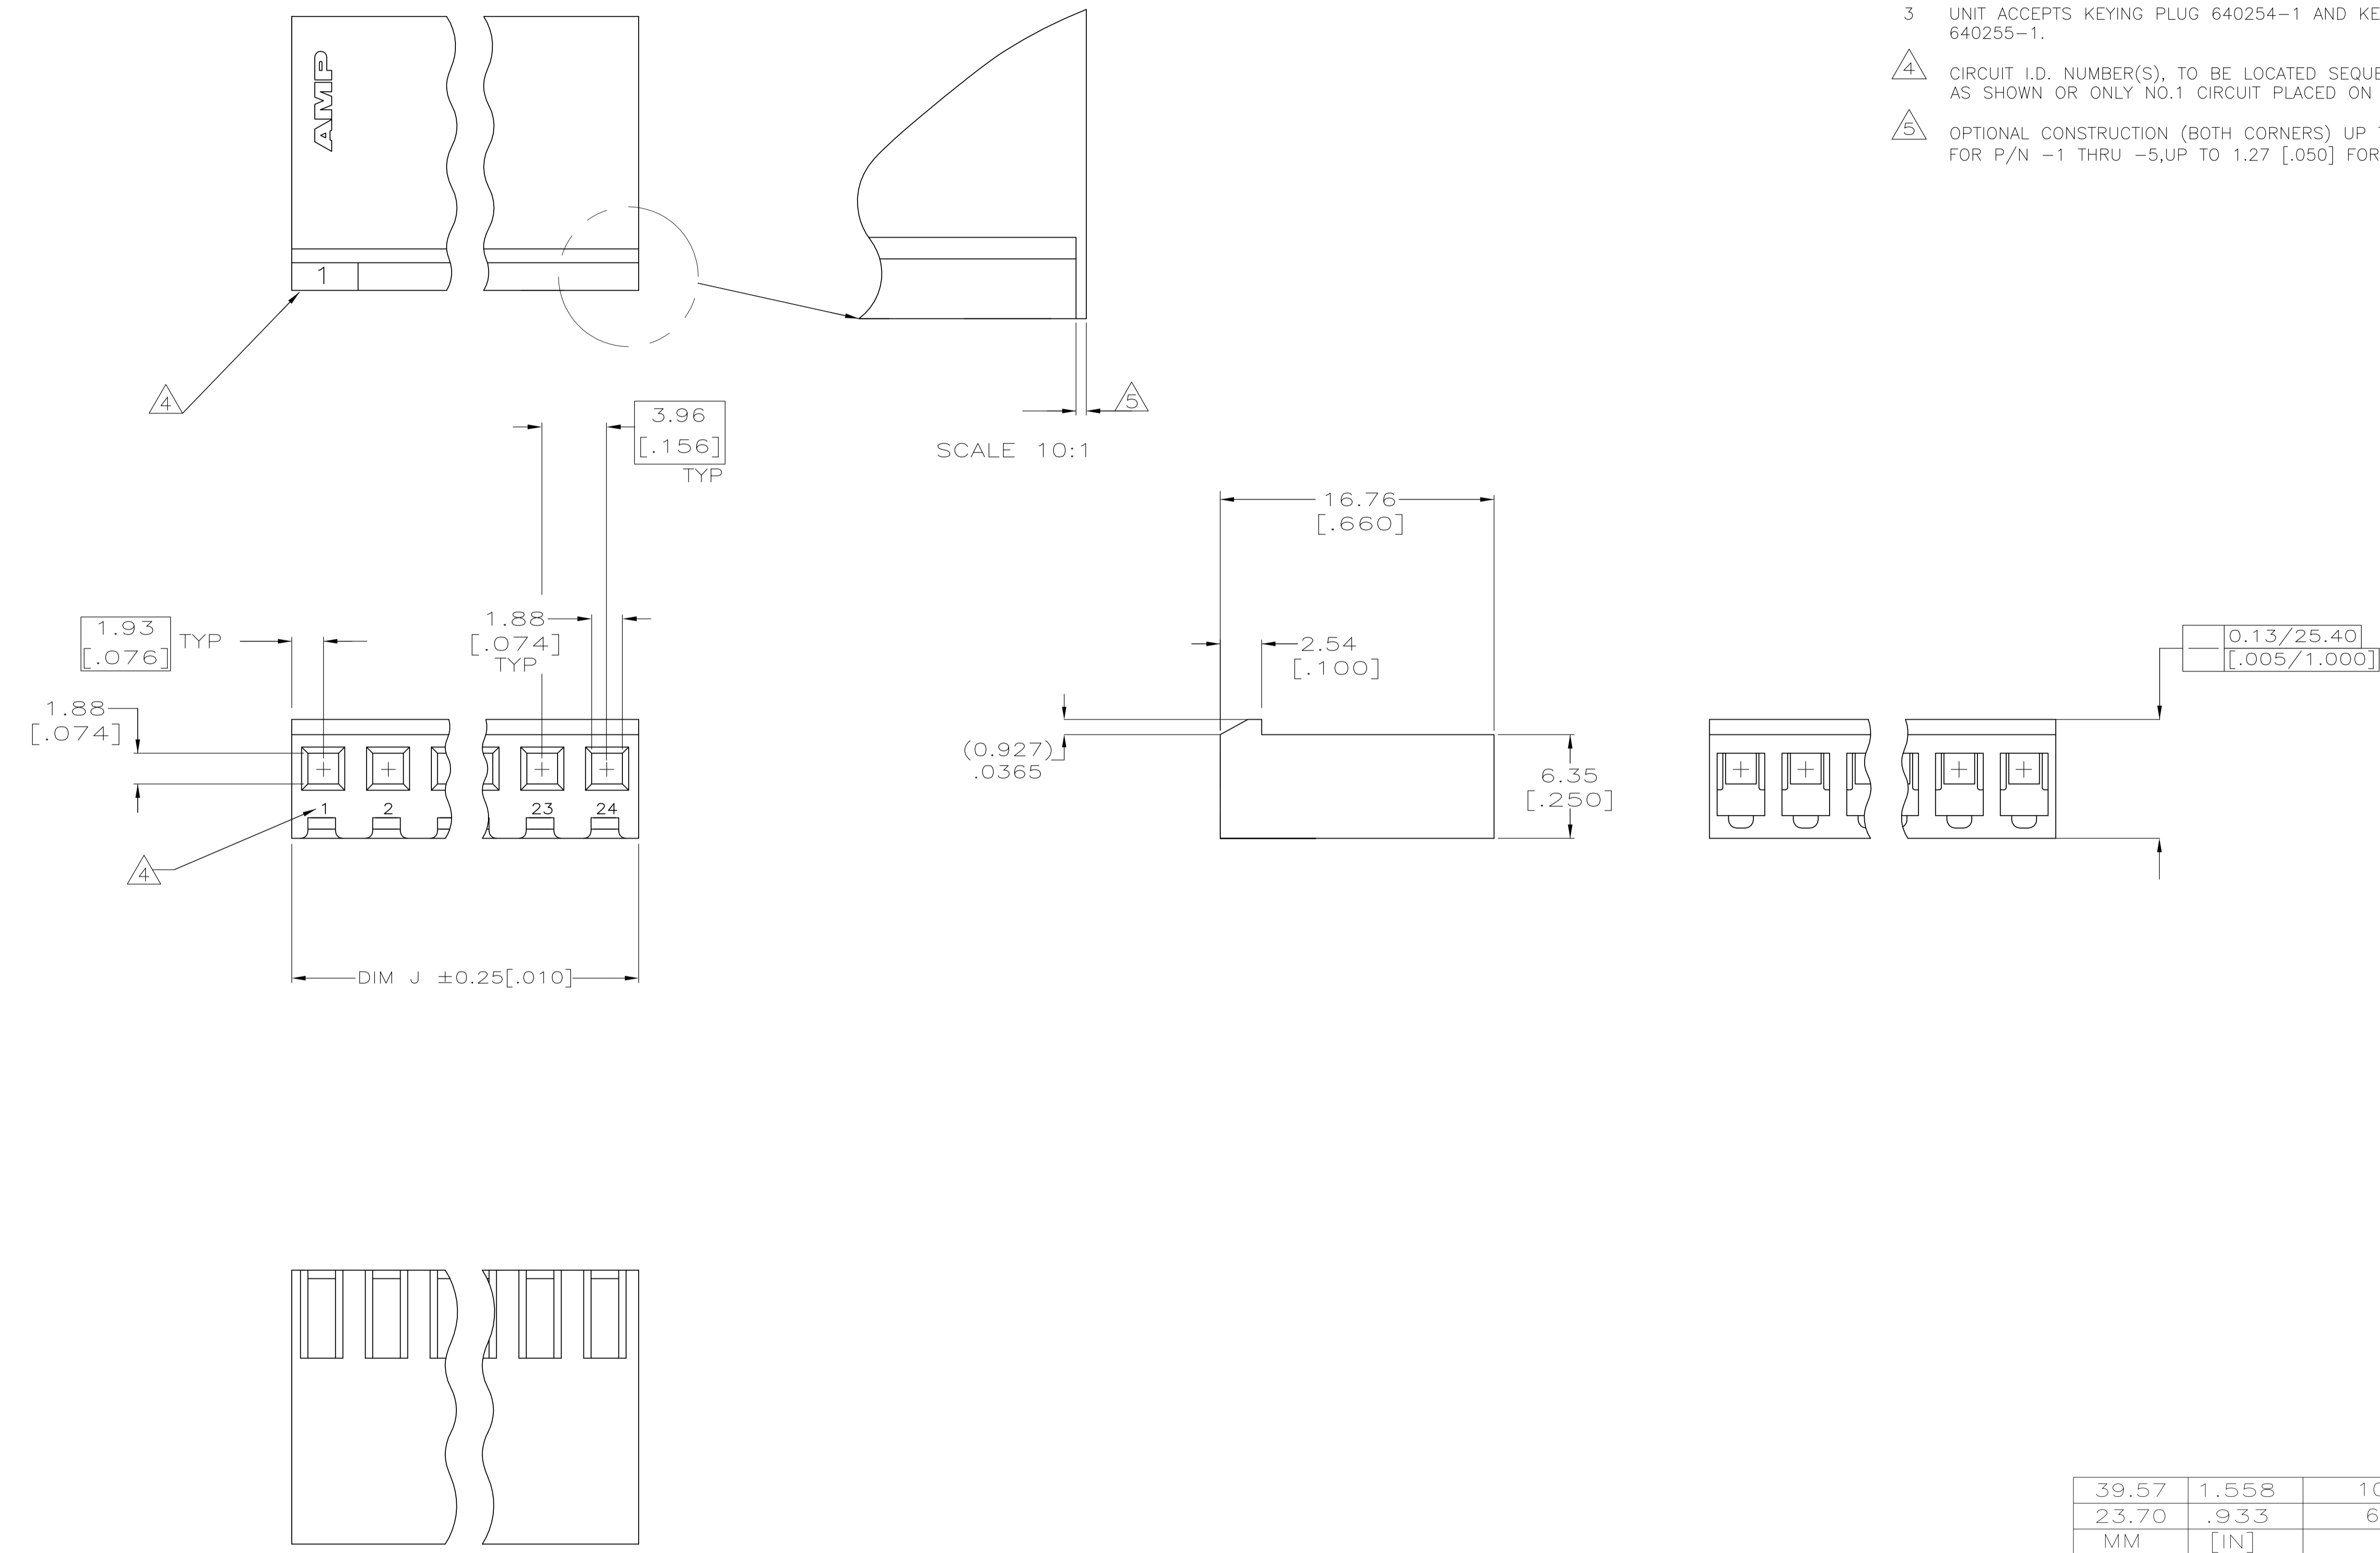

- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS SL-156 CONTACTS 350980, 640252, 640706, 640707, 641550 AND 770258 (ALL DASH NUMBERS).
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 CIRCUIT I.D. NUMBER(S), TO BE LOCATED SEQUENTIALLY AS SHOWN OR ONLY NO.1 CIRCUIT PLACED ON LOCKING RAMP.
- 5 OPTIONAL CONSTRUCTION (BOTH CORNERS) UP TO 0.38 [.015] FOR P/N -1 THRU -5, UP TO 1.27 [.050] FOR P/N -6 THRU 2--4.

39.57	1.558	10	1-770707-0
23.70	.933	6	770707-6
MM	[IN]		
J		NO. OF CIRCUITS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN S. HAMM 08-JAN-2002	TE Connectivity
0 PLC ±	1 PLC ±	CHK J. ELLIS 08-JAN-2002	
2 PLC ±	3 PLC ± 0.13 [.005]	APVD J. ELLIS 08-JAN-2002	NAME
4 PLC ±	ANGLES ± 0°30'	PRODUCT SPEC	HOUSING WITH LOCKING RAMP, SL-156, WITH LARGE OPENING
MATERIAL NYLON, UL 94V-0 NATURAL	FINISH	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
		WEIGHT	A1 00779 C=770707
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV G