

Peak Emission Wavelength: 1200 nm

The 1200nm IR emitter series is designed for applications requiring precise optical / mechanical axis alignment and IR radiation in the SWIR range. Custom package solutions and sorting are available.

FEATURES

- > 3mm Plastic Package
- > Wide Beam Angle
- > High Reliability

APPLICATIONS

- > Bio Medical Applications
- > Optical Sensors
- > Optical Communications



Absolute Maximum Ratings (Ta=25°C)




| ITEMS | SYMBOL | RATINGS | UNIT |
|------------------------------|--------|------------|------|
| Forward Current (DC) | IF | 100 | mA |
| Forward Current (Pulse)*1 | IFP | 1 | A |
| Reverse Voltage | VR | 5 | V |
| Power Dissipation | PD | 100 | mW |
| Operating Temperature Range | Topr | -25 ~ +85 | °C |
| Storage Temperature Range | Tstg | -30 ~ +100 | °C |
| Lead Soldering Temperature*2 | Tls | 260 | °C |



*1: Tw=10μsec, T=10msec; *2: Time 5 Sec max, Position: Up to 3mm from the body.

Electrical & Optical Characteristics (Ta = 25°C)


| ITEMS | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------|--------|------------|-----|------|-----|------|
| Power Output | PO | IF=50mA | -- | 9.5 | -- | mW |
| Forward Voltage | VF | IF=50mA | -- | 1.14 | -- | V |
| Power Output | PO | IF=20mA | -- | 4.6 | -- | mW |
| Forward Voltage | VF | IF=20mA | -- | 1.00 | -- | V |
| Reverse Current | IR | VR=5V | -- | -- | -- | μA |
| Peak Emission Wavelength | λp | IF=20mA | -- | 1200 | -- | nm |
| Spectral Line Half Width | Δλ | IF=20mA | -- | 66 | -- | nm |
| Half Intensity Beam Angle | Θ | IF=20mA | -- | 120 | -- | deg |

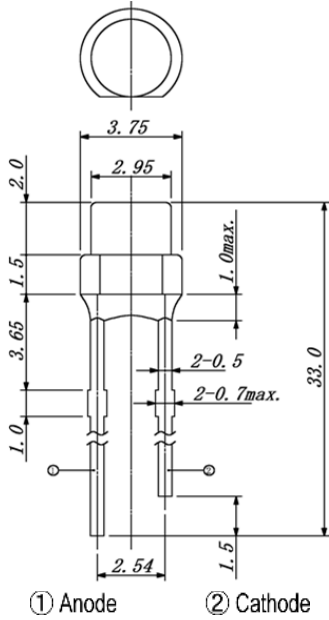

SPECTRAL OUTPUT

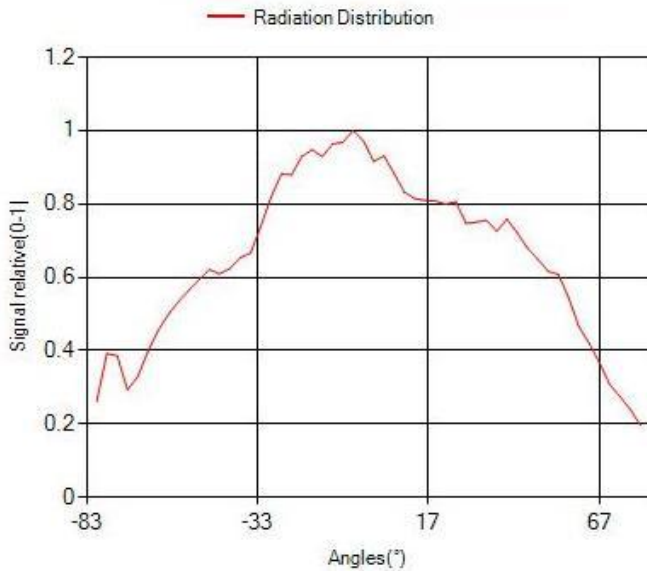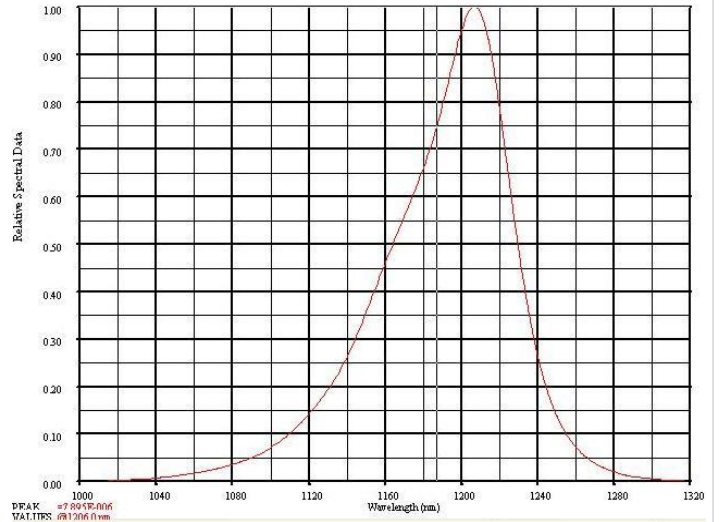


Forward V-I Characteristics

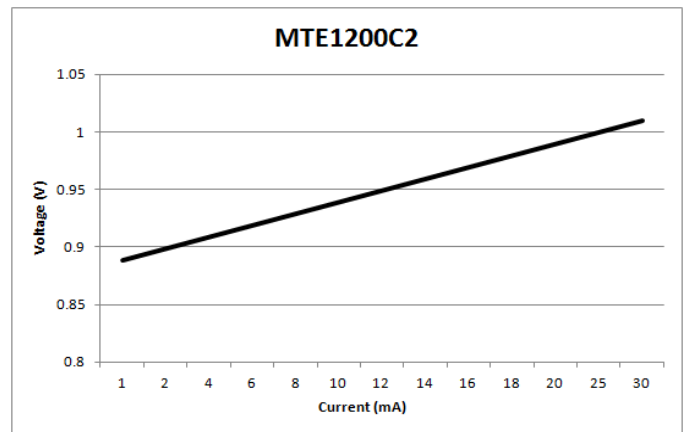

Unit: mm, Tolerance: ±0.2

VIEW ANGLE

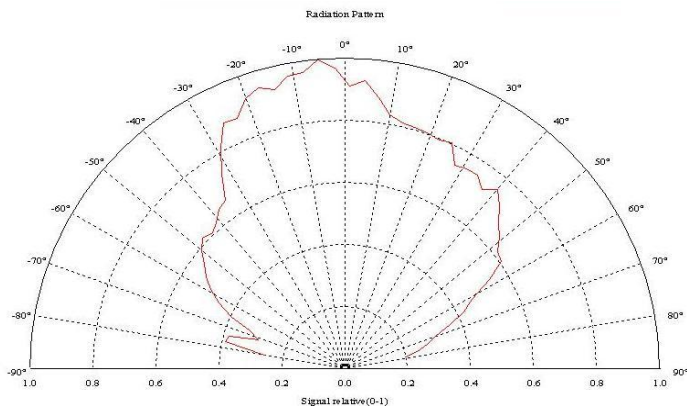

The information contained herein is subject to change without notice.

2019-01-15