
## SIEMENS

## Data sheet

## 3SU1031-0CB40-0AA0

	Illuminated pushbutton, 22 mm, round, plastic with metal front ring, green, Front			
	ring, raised momentary contact type			
product brand name	SIRIUS ACT			
product designation	Illuminated pushbuttons			
design of the product	Actuating/signaling element			
product type designation	3SU1			
product line	Plastic with metal front ring, matt, 22 mm			
Enclosure				
number of command points	1			
Actuator				
design of the actuating element	Flat button			
principle of operation of the actuating element	momentary contact type			
product extension optional				
light source	Yes			
contact module	Yes			
color of the actuating element	green			
material of the actuating element	plastic			
shape of the actuating element	round			
outer diameter of the actuating element	29.5 mm			
Front ring				
product component front ring	Yes			
design of the front ring	high			
material of the front ring	Metal, matt			
color of the front ring	sand gray			
General technical data				
protection class IP	IP66, IP67, IP69(IP69K)			
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13			
shock resistance	1, 2, 3, 31, 4, 47, 12, 13			
according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms			
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B			
vibration resistance				
according to IEC 60068-2-6	10 500 Hz: 5g			
for railway applications according to EN 61373	Category 1, Class B			
operating frequency maximum	3 600 1/h			
mechanical service life (operating cycles) typical	3 000 000			
reference code according to IEC 81346-2	S			
Substance Prohibitance (Date)	10/01/2014			
Ambient conditions				
ambient temperature				
during operation	-25 +70 °C			
• during storage	-40 +80 °C			
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)			
Installation/ mounting/ dimensions				
height	29.5 mm			
width	29.5 mm			
shape of the installation opening	round			
mounting diameter	22.3 mm			
positive tolerance of installation diameter	0.4 mm			
mounting height	16.2 mm			
installation width	29.5 mm			
installation depth	24.3 mm			
Certificates/ approvals				

General Product App	roval			Declaration of Confo	ormity
(S) M	<u>Confirmation</u>	(UL)	EAC	CE EG-Konf.	UK CA
Test Certificates		Marine / Shipping			
Type Test Certific- ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	Lloyd's Register	PRS	RINA
other					
rther information					
https://press.siemens.c Biemens is working o Please contact your loc EAC relevant market (c Information on the pa https://support.industry.	to exit the Russian market com/global/en/pressrelease/ in the renewal of the curre cal Siemens office on the sta other than the sanctioned E/ ickaging .siemens.com/cs/ww/en/vie/ rnloadcenter (Catalogs, Br	siemens-wind-down-rus nt EAC certificates. atus of validity of the EA AEU member states Ru w/109813875	AC certification if you intend	I to import or offer to sup	pply these products to a
https://www.siemens.cc ndustry Mall (Online https://mall.industry.sie Cax online generator http://support.automatic	om/ic10	og/product?mlfb=3SU1 rder/default.aspx?lang=		<u>)-0AA0</u>	
https://support.industry. mage database (prod	.siemens.com/cs/ww/en/ps/ luct images, 2D dimension siemens.com/bilddb/cax_de	3SU1031-0CB40-0AA0 n drawings, 3D models	s, device circuit diagrams	s, EPLAN macros,)	

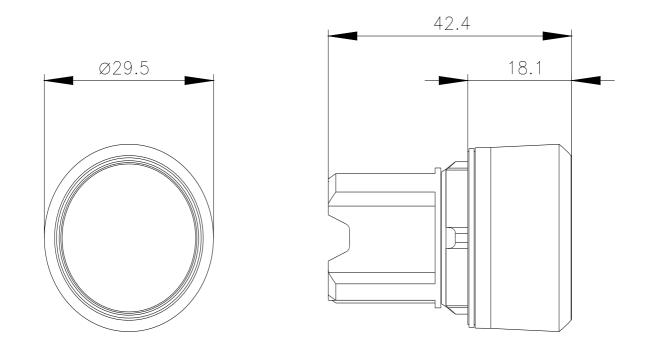

last modified:

1/26/2022 🖸