

Ŧ	<mark>م</mark>	п –	m	O



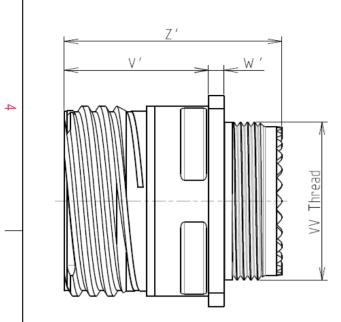



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souria	u contacts and Accessories		
	-Temperature Range	 -65°C to +200°C 		
	-Salt Spray	: 2000 hours		
	-Mass	: 14.1 g ± 10%		
		-		

8D 0

G

13

Μ

08

Ρ

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
V THREAD	M18x1-6g


ORIENTATION : C


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-08



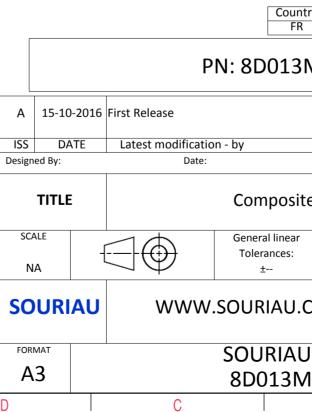

Φ		A	
			4
AS EXAMPLE			3
any non-conformits which does not co or of the Parties or b adation, technical n untry Jurisc R 3M08PC	mply with by a third party		2
	CUSTOMER DRAWIN	MOD N°	<u> </u>
ite Receptacle 8D series			
ar	NPRDS / PROJECT 859		
I.COM	This document is the SOURIAL it must not be repr communicated withou	J roduced or	1
U DRG N° M08PC-C	1	SHEET	
		A	J
-	·		

		۵	ات	m		0
		Contact Layout				Panel Cutout
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Com posi II A E CC C C C E F G G H	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			~ ~	
ى ع		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
23						Country FR PN: 8D013N
					A 15-10-20 ISS DATE Designed By:	16 First Release
					SCALE	General linear Tolerances:
<u> </u>					SOURIA	U WWW.SOURIAU.Co
			_		FORMAT A3	SOURIAU 8D013M0
	Н	G	F	E	D	C

