

Ratings

Voltage: 300 V
 Temperature: -10 to 105 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 11

Outer jacket

Material: PVC/38P
 Color: black
 Diameter: 3 ±0.20 mm (1.5 ±0.1 x 2)
 Nominal thickness: 0.42 mm

Electrical requirements

Voltage test: 300 V
 Spark test: 3.0 kV
 Conductor maximum resistance at 20 °C: 94.2 ohms/km
 Jacket resistance at 20 °C: 10 Mohms/km
 Dielectric test: 2000 Vac for 1 minute with no breakdown


Mechanical requirements

Jacket tensile strength: 1.05 kgf/mm²
 After aging at 136±2 °C for 7 days:
 Minimum tensile strength 70% of original
 Minimum elongation 65% of original

Environmental requirements

Heat shock: 136±1 °C/1 hour, no observed degradation
 Deformation: 136±1 °C/1 hour, ≤50%
 Cold bend: -10±2 °C/1 hour, no observed cracking

Wire marking: E339579 UL AWM STYLE 2651 24 AWG 105°C
 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY

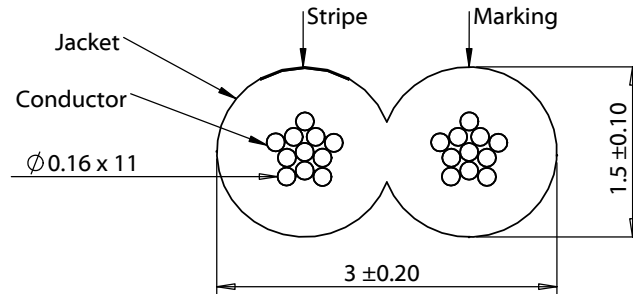

Revision:	Date:	Description:
A	12/06/2016	Initial release

Prepared:
GL
Digitally signed by GL
 Date: 2017.10.06
 10:18:51 -07'00'

Verified:
AG
Digitally signed by AG
 Date: 2017.10.20
 11:25:19 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 2C TS, 24 AWG, UL2651, 300V, 105C, 3.0 mm, VW-1, PVC

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-00802
Scale: 15:1	Sheet 1 of 1