

EPC2019 – Enhancement Mode Power Transistor

 V_{DS} , 200 V $R_{DS(on)}$, 42 mΩ max I_D , 8.5 A

RoHS

Halogen-Free

Gallium Nitride's exceptionally high electron mobility and low temperature coefficient allows very low $R_{DS(on)}$, while its lateral device structure and majority carrier diode provide exceptionally low Q_G and zero Q_{RR} . The end result is a device that can handle tasks where very high switching frequency, and low on-time are beneficial as well as those where on-state losses dominate.

APPLICATION NOTES:

- Easy-to-use and reliable gate, Gate Drive ON = 5 V typical, OFF = 0 V (negative voltage not needed)
- Top of FET is electrically connected to source
- Questions: **Ask a GaN Expert**




Maximum Ratings			
PARAMETER		VALUE	UNIT
V_{DS}	Drain-to-Source Voltage (Continuous)	200	V
	Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	240	
I_D	Continuous ($T_A = 25^\circ\text{C}$, $R_{\theta JA} = 18^\circ\text{C/W}$)	8.5	A
	Pulsed (25°C , $T_{PULSE} = 300 \mu\text{s}$)	45	
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
T_J	Operating Temperature	-40 to 150	°C
T_{STG}	Storage Temperature	-40 to 150	

Thermal Characteristics			
PARAMETER		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	2.7	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board	7.5	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	72	

Note 1: $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board. See https://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf for details.

Static Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-to-Source Voltage	$V_{GS} = 0\text{ V}$, $I_D = 125 \mu\text{A}$	200			V
I_{DSS}	Drain-Source Leakage	$V_{GS} = 0\text{ V}$, $V_{DS} = 160\text{ V}$		1	100	μA
I_{GSS}	Gate-to-Source Forward Leakage	$V_{GS} = 5\text{ V}$		0.001	2.5	mA
	Gate-to-Source Reverse Leakage	$V_{GS} = -4\text{ V}$		1	100	μA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = 1.5\text{ mA}$	0.8	1.4	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	$V_{GS} = 5\text{ V}$, $I_D = 7\text{ A}$		22	42	mΩ
V_{SD}	Source-Drain Forward Voltage [#]	$I_S = 0.5\text{ A}$, $V_{GS} = 0\text{ V}$		2.0		V

[#] Defined by design. Not subject to production test.

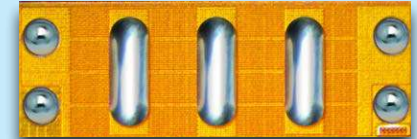

EPC2019 eGaN® FETs are supplied only in passivated die form with solder bars
Die size: 2.77 x 0.95 mm

Applications

- High Speed DC-DC conversion
- Class-D Audio
- High Frequency Hard-Switching and Soft-Switching Circuits

Benefits

- Ultra High Efficiency
- Ultra Low $R_{DS(on)}$
- Ultra Low Q_G
- Ultra Small Footprint



Dynamic Characteristics# (T _j = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C _{ISS}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 100 V		254	288	pF
C _{RSS}	Reverse Transfer Capacitance			1.3		
C _{OSS}	Output Capacitance			135	163	
C _{OSS(ER)}	Effective Output Capacitance, Energy Related (Note 2)	V _{GS} = 0 V, V _{DS} = 0 to 100 V		156		
C _{OSS(TR)}	Effective Output Capacitance, Time Related (Note 3)			201		
R _G	Gate Resistance			0.4		Ω
Q _G	Total Gate Charge	V _{GS} = 5 V, V _{DS} = 100 V, I _D = 7 A		2.4	2.9	nC
Q _{GS}	Gate-to-Source Charge	V _{DS} = 100 V, I _D = 7 A		0.8		
Q _{GD}	Gate-to-Drain Charge			0.6		
Q _{G(TH)}	Gate Charge at Threshold			0.6		
Q _{OSS}	Output Charge	V _{GS} = 0 V, V _{DS} = 100 V		20	24	
Q _{RR}	Source-Drain Recovery Charge			0		

All measurements were done with substrate connected to source.

Defined by design. Not subject to production test.

Note 2: C_{OSS(ER)} is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Note 3: C_{OSS(TR)} is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1: Typical Output Characteristics at 25°C

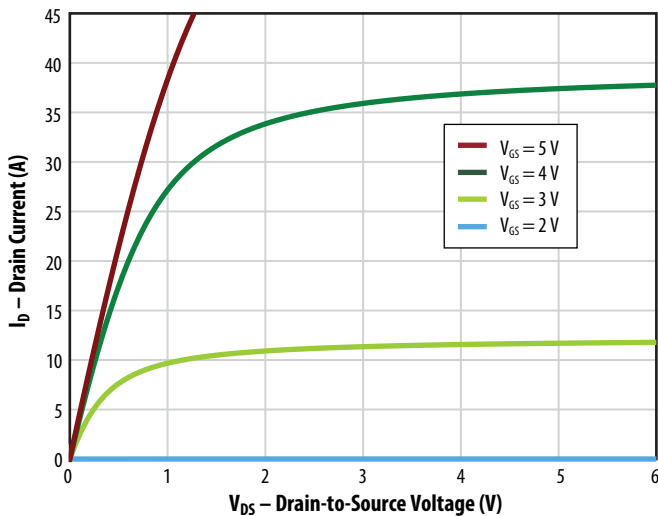


Figure 2: Typical Transfer Characteristics

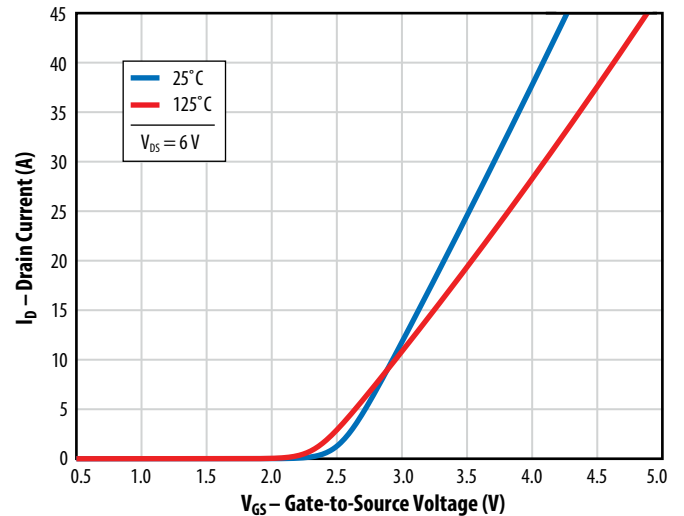


Figure 3: R_{DS(on)} vs. V_{GS} for Various Drain Currents

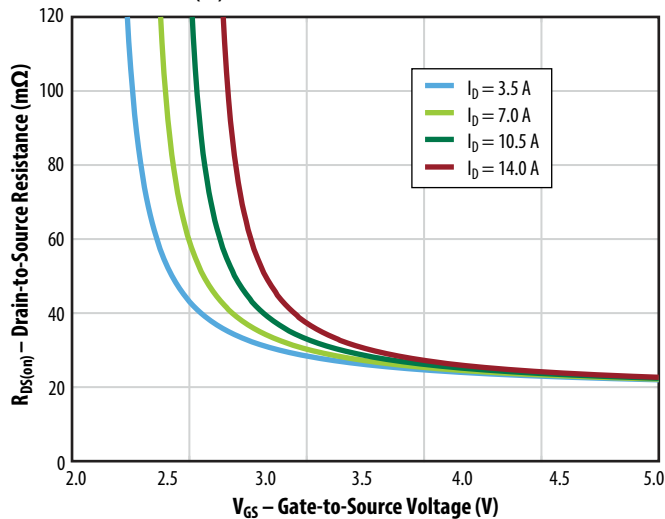


Figure 4: Typical R_{DS(on)} vs. V_{GS} for Various Temperatures

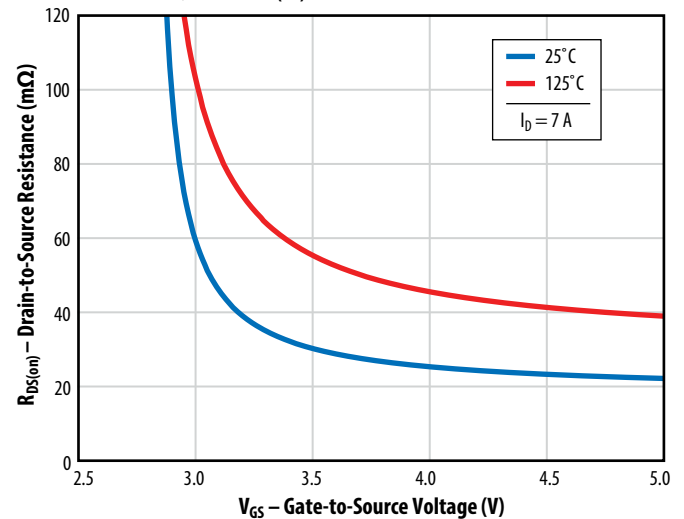


Figure 5a: Typical Capacitance (Linear Scale)

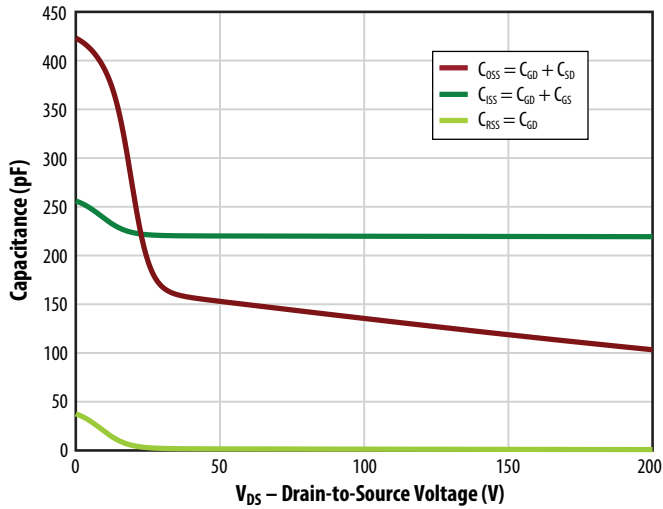


Figure 5b: Typical Capacitance (Log Scale)

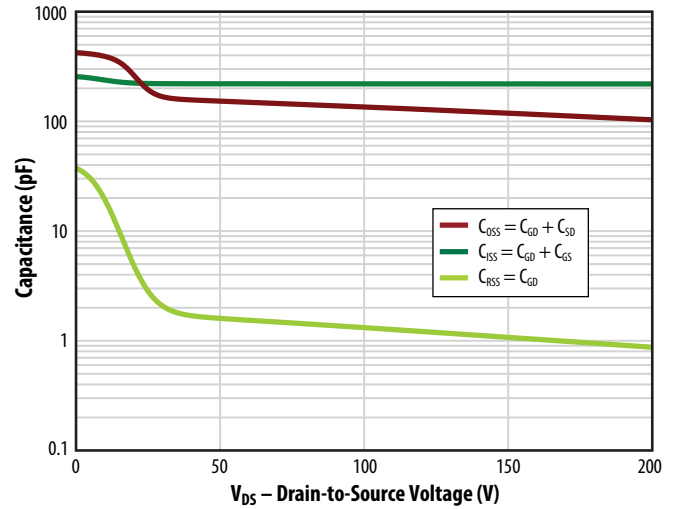


Figure 6: Typical Output Charge and C_{oss} Stored Energy

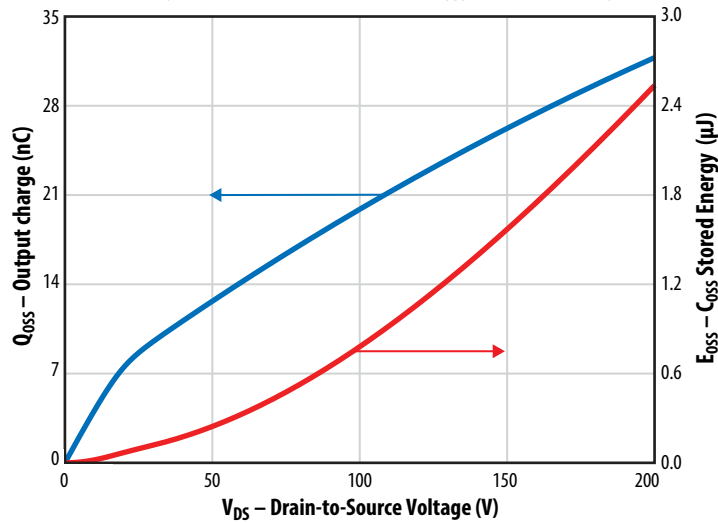


Figure 7: Typical Gate Charge

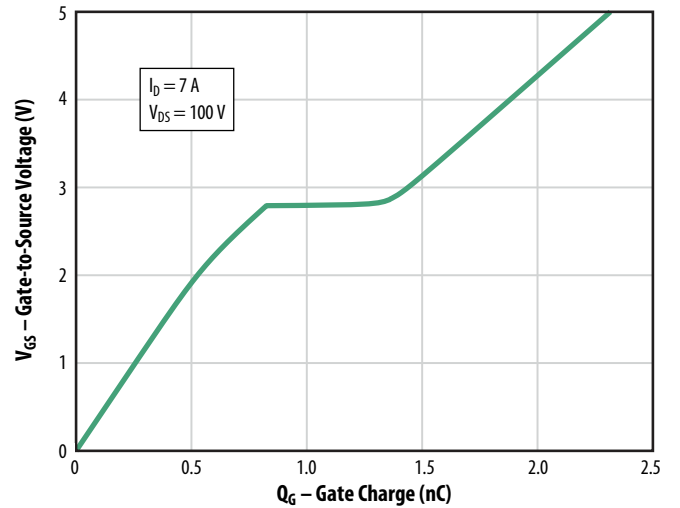


Figure 8: Reverse Drain-Source Characteristics


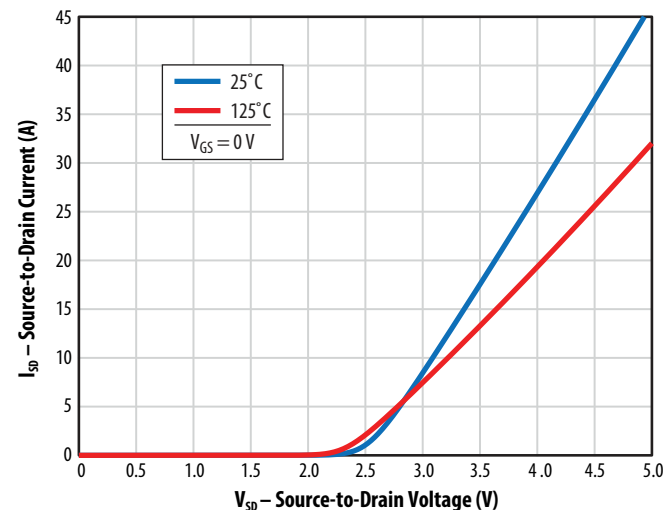


Figure 9: Normalized On-State Resistance vs. Temperature

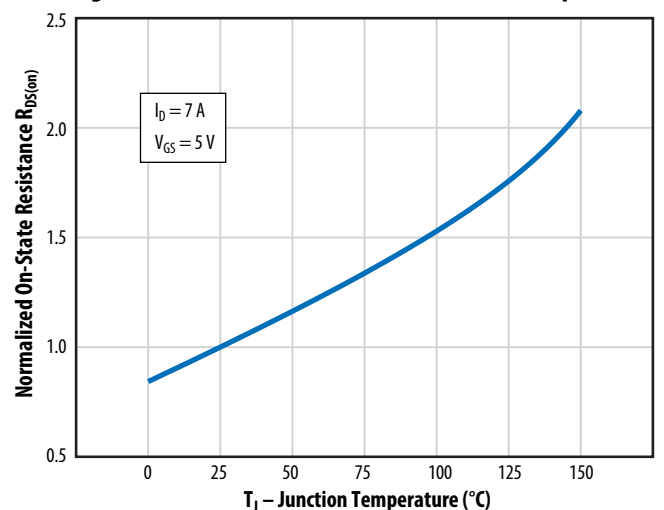

Note: Negative gate drive voltage increases the reverse drain-source voltage.
EPC recommends 0V for OFF.

Figure 10: Normalized Threshold Voltage vs. Temperature

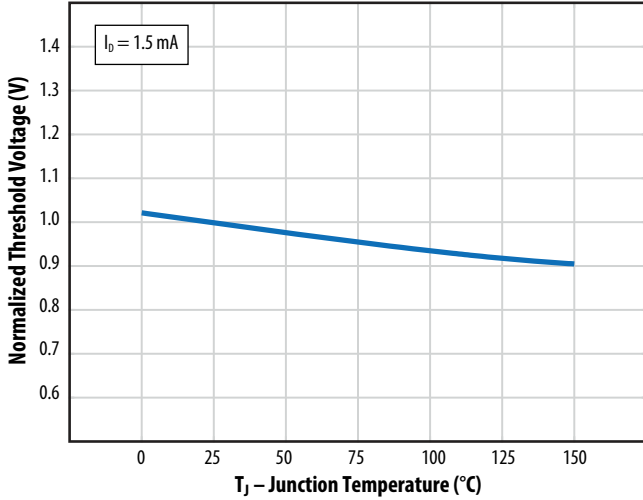


Figure 11: Safe Operating Area




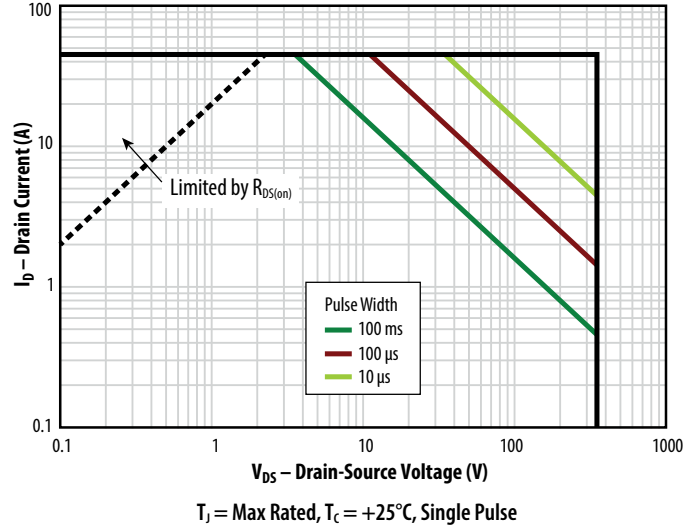


Figure 12: Transient Thermal Response Curves

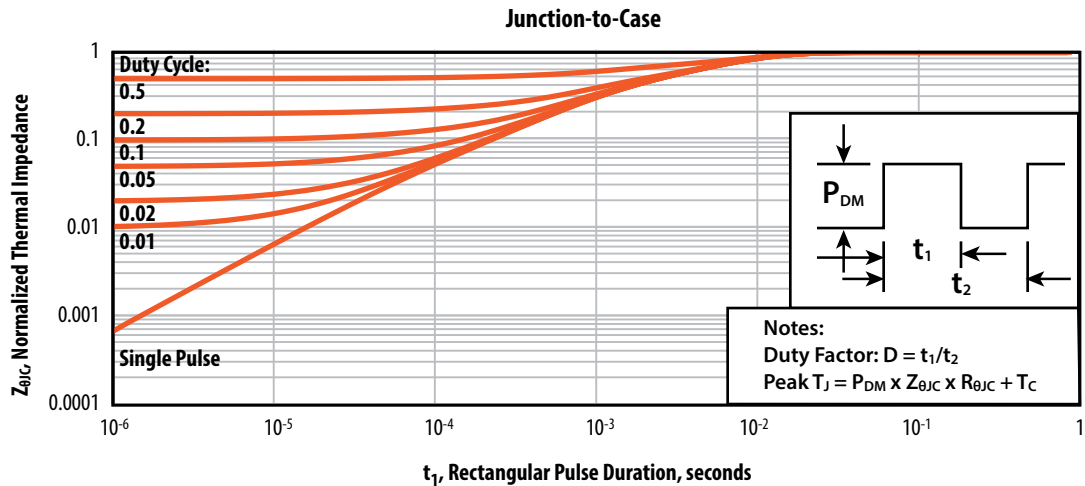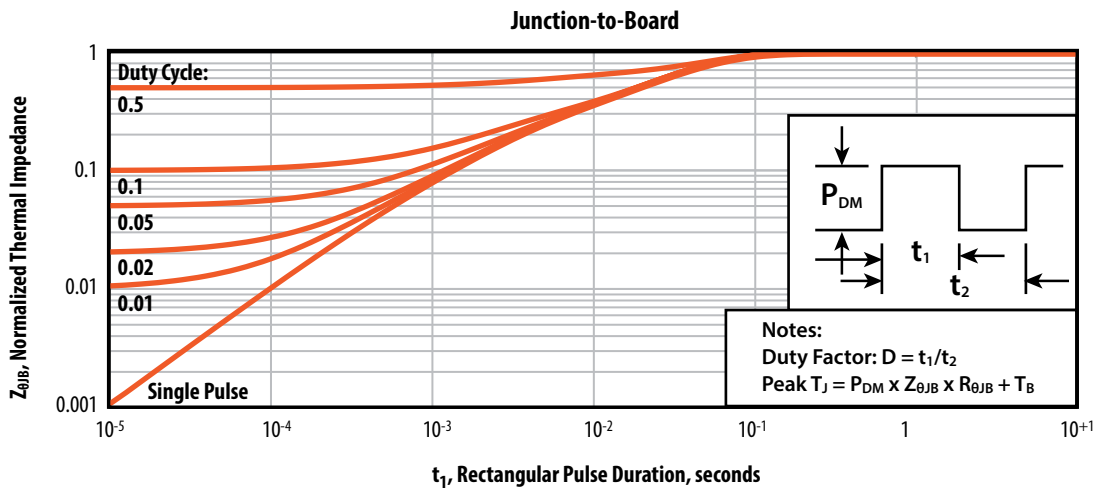

TAPE AND REEL CONFIGURATION


4 mm pitch, 8 mm wide tape on 7" reel

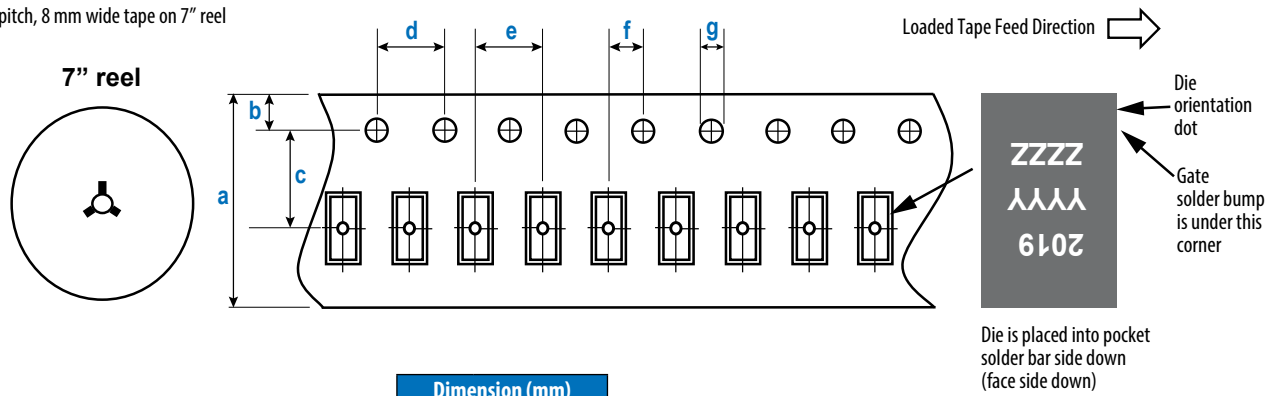

EPC2019 (Note 1)	Dimension (mm)		
	Target	MIN	MAX
a	8.00	7.90	8.30
b	1.75	1.65	1.85
c (Note 2)	3.50	3.45	3.55
d	4.00	3.90	4.10
e	4.00	3.90	4.10
f (Note 2)	2.00	1.95	2.05
g	1.50	1.40	1.60

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/ JEDEC industry standard.
 Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.


DIE MARKINGS

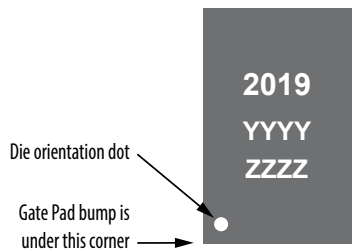


Part Number	Laser Markings		
	Part # Marking Line 1	Lot Date Code Marking Line 2	Lot Date Code Marking Line 3
EPC2019	2019	YYYY	ZZZZ

DIE OUTLINE

Solder Bar View

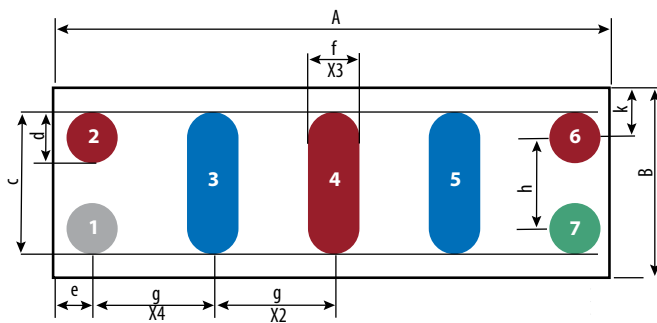


Side View

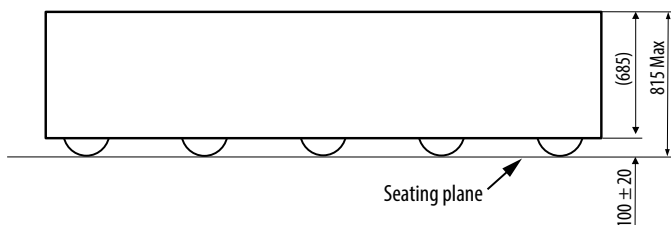

DIM	MICROMETERS		
	MIN	Nominal	MAX
A	2736	2766	2796
B	920	950	980
c	697	700	703
d	247	250	253
e	168	183	198
f	245	250	255
g	600	600	600
h	450	450	450
i	235	250	265

Pad no.1 is Gate;
 Pad no. 3, 5 are Drain;
 Pad no. 2, 4, 6 are Source;
 Pad no. 7 is Substrate.*

*Substrate pin should be connected to Source

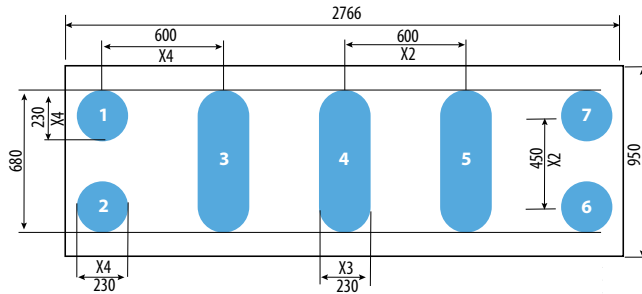**RECOMMENDED
LAND PATTERN***(measurements in μm)*

The land pattern is solder mask defined.


Pad no. 1 is Gate

Pad no. 3, 5 are Drain

Pad no. 2, 4, 6 are Source

Pad no. 7 is Substrate*

*Substrate pin should be connected to Source

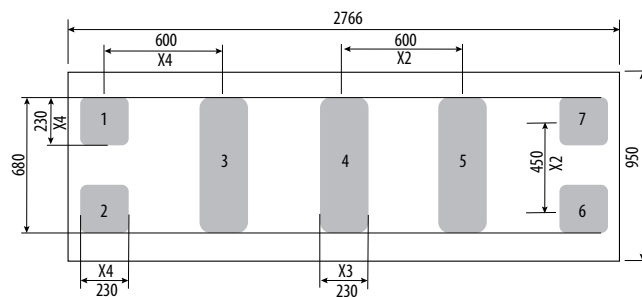**RECOMMENDED
STENCIL DRAWING***(units in μm)*Recommended stencil should be 4 mil (100 μm) thick, must be laser cut, opening per drawing.

The corner has a radius of R60.

Intended for use with SAC305 Type 4 solder, reference 88.5% metals content

Additional Resources Available

- Assembly resources available at: <https://epc-co.com/epc/DesignSupport/AssemblyBasics.aspx>
- Library of Altium footprints for production FETs and ICs: <https://epc-co.com/epc/documents/altium-files/EPC%20Altium%20Library.zip>
(for preliminary device Altium footprints, contact EPC)

Note: This datasheet is representative of lots with date code of 2131 or later.

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.
EPC Patent Listing: epc-co.com/epc/AboutEPC/Patents.aspx

Information subject to
change without notice.
Revised October 2022