

● **High reliability, Safe and unlike secondary batteries, this is pollution free devices.**


● **RoHS Compliant.**

● **ELAN P/N: DS-2R5E224U-E**


■ Spec sheet

Item	Performance	
Category temperature range (deg C)	-25 to +70	
Rated Voltage (V)	2.5	
Rated Capacitance (F)	0.22	(20deg C)
Tolerance at rated capacitance (%)	-20 to +80 (20deg C)	
Internal resistance (ohm max.)	20deg C, 1kHz	100
Characteristics at high and low temperature	Capacitance change	Within -30% to +30% at 20deg C
	Internal resistance	Less than five times of the value at 20degC
Endurance(70deg C)	Test time	500hours
	Percentage of capacitance change	Within -30% to +30% of initial value
	Internal resistance	Less than 400 ohm
Shelf life(70deg C)	Test time	500hours
	Capacitance change	Within -30% to +30% of initial value
	Internal resistance	Less than 400 ohm
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)	

■ ELNA part numbering system



■ Outline drawing

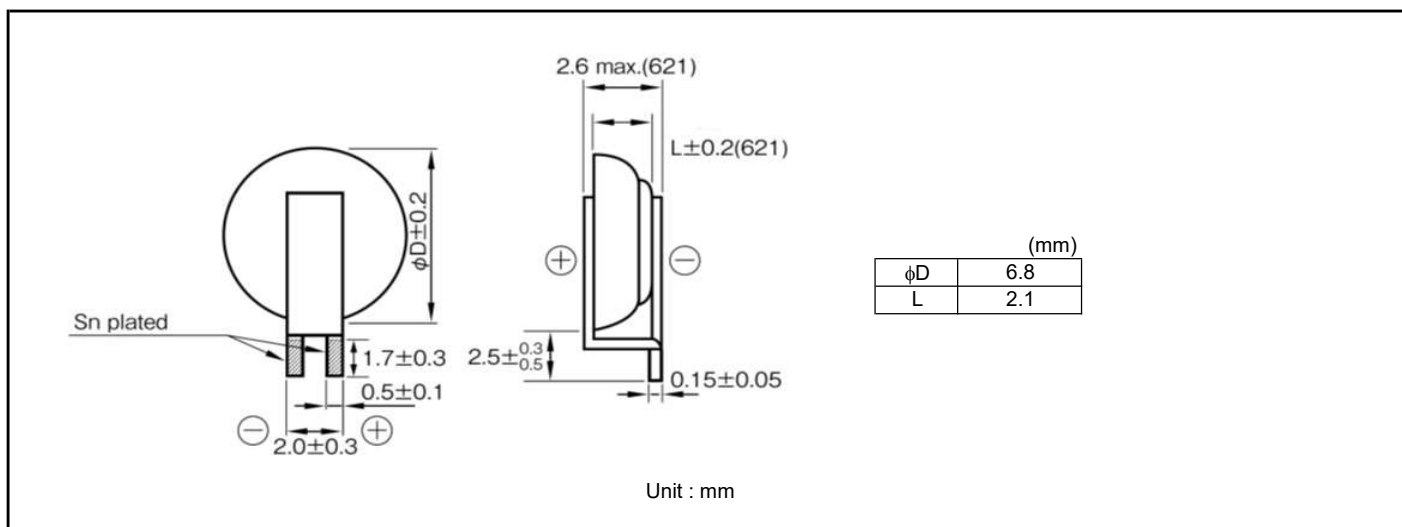

(Note) It is recommended that you shall obtain technical specifications from ELNA CO., LTD. to ensure that the component is suitable for your intended use.