


End1

End2

Length in Meter (-0/+50mm≤1M; 1M<-0/+100mm<10M; -0/+1%L≥10M)

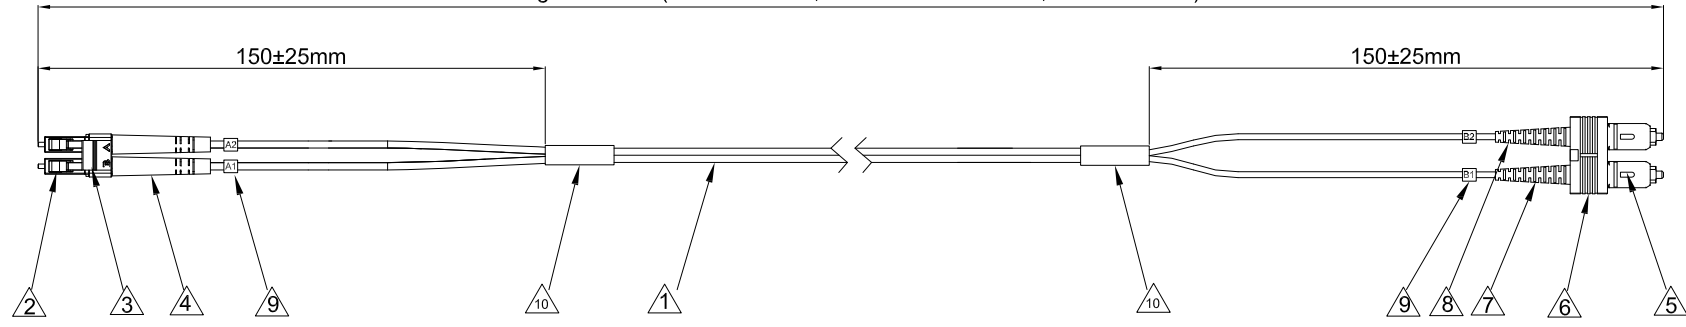

Performance:

- a. Insertion Loss: ≤0.3dB.
- b. Return Loss: ≥20dB.
- c. Fiber Extension: -100nm<H<+100nm.
- d. Ferrule End-Face Radius: 7<R<25mm(LC/UPC)
10<R<25mm(SC/UPC).
- e. Apex Offset: ≤ 50um.
- f. Increase in insertion Loss after 500 mating: 0.2 dB Max.
- g. Operation Temperature: -40° to +75°.

No.	Specifications	Qty.
①	2.8X5.7mm MM 62.5/125 Duplex Cable / LSZH / Orange	1
②	3.0mm LC/UPC MM Connector / Beige	2
③	LC Duplex Clip / Beige	1
④	LC 3.0mm Boot / Beige	2
⑤	3.0mm SC/UPC MM Connector / Beige	2
⑥	SC Duplex Clip / Beige	1
⑦	SC 3.0mm Boot / Black	1
⑧	SC 3.0mm Boot / Red	1
⑨	Tail Identification Marker (3mm C-Clip) /NO. A1, A2, B1, B2	4
⑩	Heatshrink Tube / Black	2

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	09.02.2018	Tom
						Approved	16.04.2019	Amy
								ASSMANN WSW-No. DK-2632-xx
DIM	TOL	①	Update the cable OD	16.04.2019	Segal			Drawing-No. ASS 8198 CA
		②	Drawn	09.02.2018	Amy			rev01
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	

1

2

3

4

5

6

7