

MCON Interconnection System

TE Internal #: 1488991-5 Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.2 mm [.047 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: **3**

Centerline (Pitch): 4 mm [.157 in]

Features

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire

	VVIIE
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	3
Number of Rows	1
Body Features	
Primary Product Color	Black
Connector & Keying Code	A
Contact Features	
Contact Size	1.2mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Mechanical Attachment	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	PAGF	
Centerline (Pitch)	4 mm[.157 in]	
Dimensions		
Connector Height	15.6 mm[.614 in]	
Product Width	26.5 mm[1.043 in]	
Product Length	19 mm[.748 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 ° F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]	

Operation/Application

Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

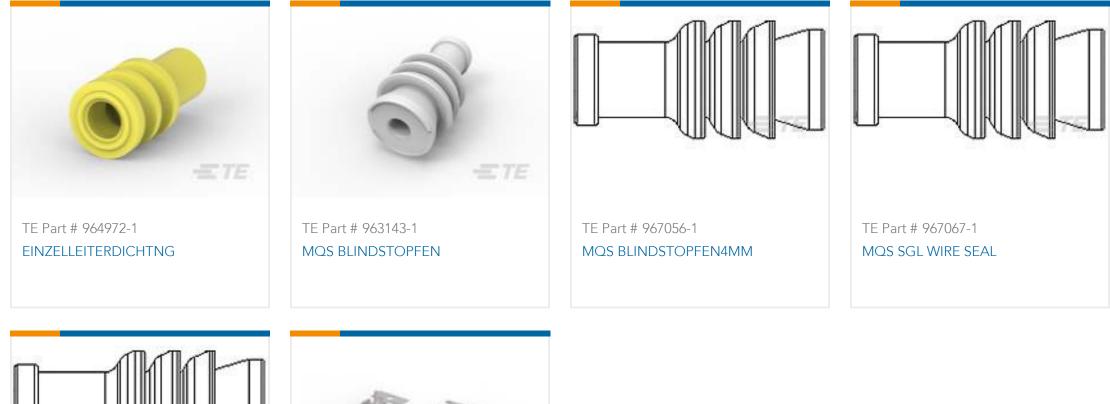




Also in the Series | MCON Interconnection System

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



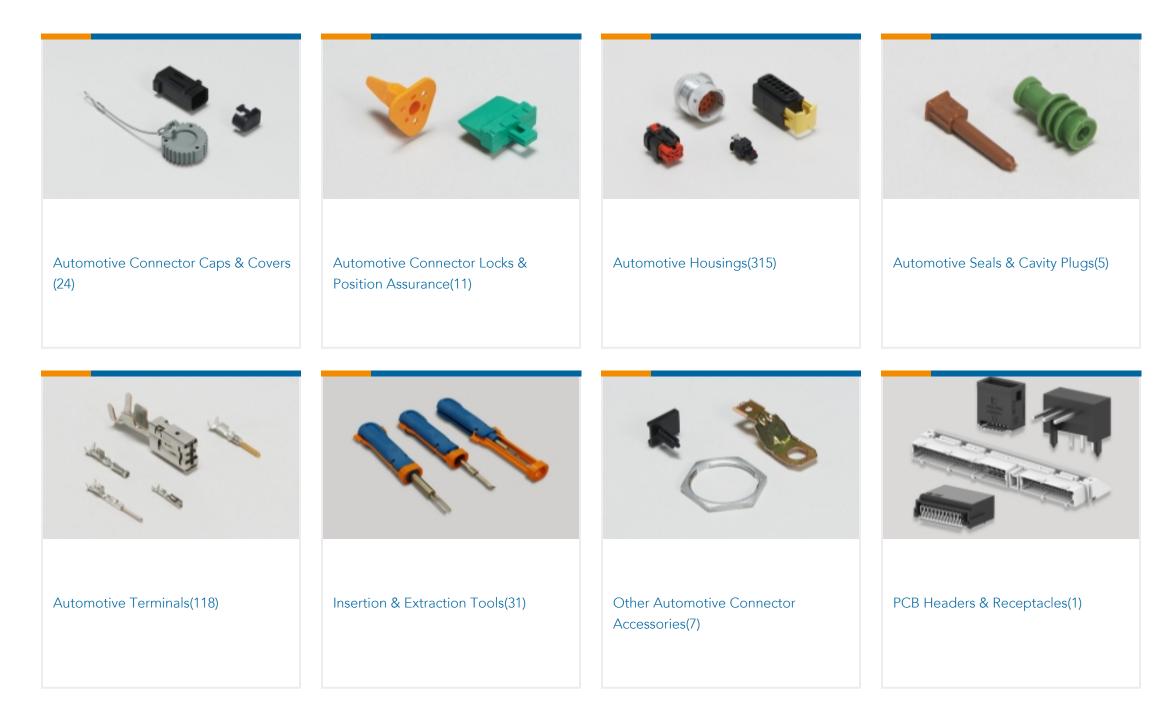

Customers Also Bought



TH/.025 CONNECTOR SYSTEM, HOUSING	090III 14P CAP ASSY	2.8MM MCP-E REC CONT	DTB TAB HSG ASSY, 49POSN., FAKRA TYPE
TE Part #2-1823393-6 COVER,90,1KS LEFT,ASSY	TE Part #2174106-1 PLUG HOUSING ASSEMBLY 50POS 0.5 /1.0	TE Part #2174117-1 PLUG HOUSING ASSEMBLY 80POS 0.5 /1.0	TE Part #2174126-1 WIRE COVER 80POS 0.5/1.0 SEALED CONN

TE Part #2188507-1 025/110 HYB 8P CAP ASS'Y

Documents

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Product Drawings 3POS, MCON 1.2 CB REC 2p TL SEALED

English

CAD Files

Customer View Model ENG_CVM_CVM_1488991-5_D.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1488991-5_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1488991-5_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages MCON Interconnection System

English

Instruction Sheets Instruction Sheet (U.S.) English

Instruction Sheet (U.S.)

English