

## VSSC4 CL FG 24VAC/DC Ex

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmuller.com



Overvoltage coupling along the conductor path may disturb or destroy sensitive signal inputs. It is important to provide protection in the immediate vicinity of I&C devices. Weidmüller's broad product range for the I&C sector offers products in a 2-piece, pluggable design and modular terminals for tension clamp or screw connection. These products are suitable for both binary and analogue signals. Weidmüller also offers other designs with integrated components such as gas discharge tubes or varistors. VARITECTOR stands for flexible and variable surge protection by Weidmüller, tested according to product standard IEC61643-21. The VARITECTOR series can be used in applications according to IEC 61643-22 / VDE 0845-3 for classes C1, C2, C3 and D1. The VARITECTOR SPC, SSC and MCZ OVP product families optimally combine electrical and mechanical properties. Size and easy handling play an important role. This surge protection is suited for confined spaces in industrial and process automation as well as in building automation applications.

### General ordering data

Order No.	<a href="#">1063810000</a>
Type	VSSC4 CL FG 24VAC/DC Ex
Version	Surge protection for instrumentation and control
GTIN (EAN)	4032248829255
Qty.	5 pc(s).

## VSSC4 CL FG 24VAC/DC Ex

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

### Dimensions and weights

Width	12.2 mm	Height	76 mm
Depth	58.5 mm	Net weight	27.4 g

### Temperatures

Humidity	5...96 %	Operating temperature	-40 °C...+70 °C
Storage temperature	-40 °C...+80 °C		

### Probability of failure

PFH in $1 \cdot 10^{-9}$ per hour	1.95	SFF	93.28 %
SIL in compliance with IEC 61508	3		

### General data

Colour	Light Blue	Isolating function	No
Mounting rail	TS 35	Optical function display	No
Protection degree		Segment	Instrumentation and Control
	IP 20		
UL 94 flammability rating	V-0		

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

### technical data

Rated voltage (AC)	24 V	Rated voltage (DC)	34 V
Rated current	300 mA	Max. continuous voltage, $U_c$ (AC)	30 V
Max. continuous voltage, $U_c$ (DC)	42 V	Discharge current $I_n$ (8/20 $\mu$ s) wire-wire	2.5 kA
Discharge current $I_{max}$ (8/20 $\mu$ s) wire-wire	5 kA	Discharge current $I_n$ (8/20 $\mu$ s) wire-PE	2.5 kA
Discharge current $I_{max}$ (8/20 $\mu$ s) wire-PE	5 kA	Discharge current, max. (8/20 $\mu$ s)	10 kA
Protection level $U_p$ (typ.)		Standards	IEC61643-21:2009, DIN EN 60079-0:2009, DIN EN 60079-26:2007, DIN EN 61241-11:2006
	$\leq 1940$ V	Humidity	5...96 %
Colour	Light Blue	Lightning test current $I_{imp}$ (10/350 $\mu$ s)	0.5 kA
Requirements category acc. to IEC 61643-21	C2, C3, D1	Residual voltage, $U_p$ typical	918 V
Volume resistance	1.8 $\Omega$ 10 %	Overload - failure mode	Modus 2
Dielectric strength at FG against PE	$\geq 500$ V		

### Connection data

Clamping range, rated connection, min.	0.5 mm <sup>2</sup>	Clamping range, rated connection, max.	4 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, min.	0.5 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, max.	4 mm <sup>2</sup>
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm

## VSSC4 CL FG 24VAC/DC Ex

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

### EX protection data

Input power, max. $P_I$	0.75 W	Internal capacitance, max. $C_I$	1 nF
Internal inductance, max. $L_I$	0 $\mu$ H	Temperature class T4/135°C (-40°C ... +120 °C) li	300 mA
Temperature class T5/100°C (-40 °C ... +85 °C) li	300 mA	Temperature class T6/85 °C (-40 °C ... +70 °C) li	300 mA

### Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

### Rated data UL

UL certificate	UL Zertifikat
----------------	---------------

### Ratings IECEx/ATEX

ATEX certificate	ATEX Certificate	IEC Ex certificate	IECEX Zertifikat
------------------	------------------	--------------------	------------------

### Classifications

ETIM 3.0	EC000943	UNSPSC	30-21-19-21
eClass 4.1	27-13-08-01	eClass 5.1	27-13-08-01
eClass 6.2	27-13-08-02	eClass 7.1	27-13-08-02

### Approvals

Approvals



ROHS	Conform
------	---------

### Probability of failure

SIL PAPER	<a href="#">SIL Paper</a>
<a href="#">3-D model</a>	

### Downloads

Package insert	<a href="#">Instruction sheet VSSC</a>
Declaration of Conformity	<a href="#">K378_02_11.pdf</a>
PDF	<a href="#">Type examination certificate</a>
<a href="#">3-D model</a>	


**VSSC4 CL FG 24VAC/DC Ex**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**



Similar to illustration

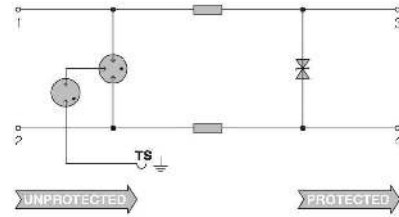

Circuit diagram

