


COIL: ● +25 °C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX  
RELEASE 4 MS MAX  
CONTACT STABILIZATION TIME 2.5 MS MAX  
ALL OTHER REQUIREMENTS TO M39016/6-209M

CUSTOMER DATA SHEET

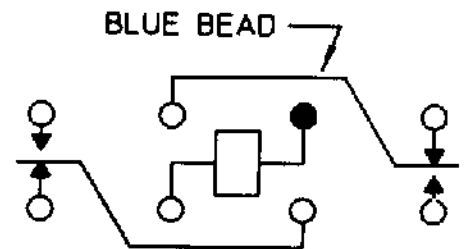

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE 100,000  
OPERATIONS

DR. R.B. 11/19/93 CK.11/19/93 gms

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. OPL  
 CUST. NO. M39016/6-209M

TYPE "HFW" RELAY

HFW1201K46M