

NOTES:
 1. MIN. PUSHOUT FORCE: .5 lb.
 2. PLANARITY TO BE WITHIN .006 [.15].
 3. Ⓢ REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL.

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DIMENSIONS ARE IN INCHES
 ONE PLACE DECIMALS ± .1 THREE PLACE DECIMALS ± .005
 TWO PLACE DECIMALS ± .01 FOUR PLACE DECIMALS ± .0020
 ANGLES ± 2°

TITLE: STAMPED & FORMED DIP ASM.
 DWG NO: ICF-XXX-XXX-X-XX
 SHEET 1 OF 1

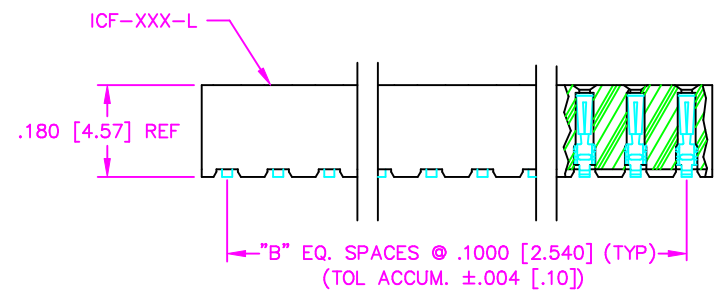
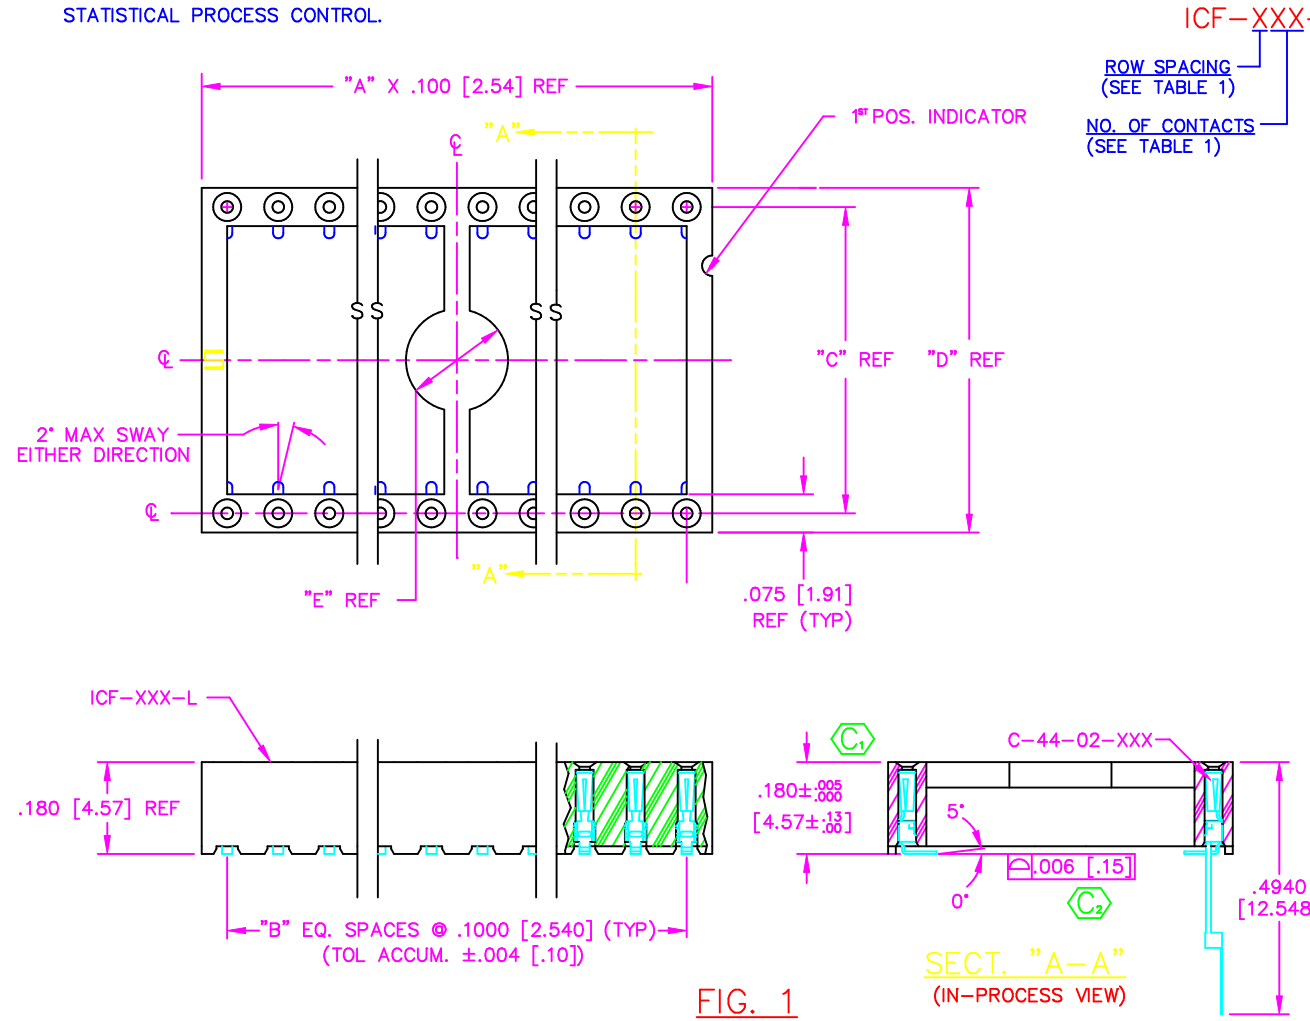


TABLE 1

"X"	"XX"	"A"	"B"	"C"	"D"	"E"
3	08	4	3	.3000 [7.620]	.375 [9.53]	.200 [5.08]
	14	7	6			
	16	8	7			
	18	9	8			
	20	10	9			
	22	11	10			
	24	12	11			
6	28	14	13	.6000 [15.240]	.675 [17.15]	.400 [10.16]
	24	12	11			
	28	14	13			
	32	16	15			
	40	20	19			
	48	24	23			

PACKAGE PARTS IN TUBE AS SHOWN (FIG 4)

TABLE 2

SERIES	LEAD STYLE	PACKAGING TUBE	PLUG
.300 [7.62]	I	PT-1-24-01-25	TP-03
.600 [15.24]	I	PT-1-24-02-25	TP-03
.300 [7.62]	0	PT-1-24-03-25	TP-03
.600 [15.24]	0	PT-1-24-04-25	TP-03

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.