



Electrical specifications

Center Frequency: 130 MHz
Bandwidth: 5 MHz min
VSWR in BW: 1.42 : 1 min
Input / Output Impedance: 50 Ohms
Passband: 127.5-132.5 MHz
Passband Insertion Loss: 4.0 dB max
Passband Ripple: 0.5 dB max
Rejection: 17dB min at F0+/-9.5 MHz
Power Handling: 12 dBm
Group Delay Variation: 100 nsec max

Mechanical


Mounting Method: SMT
Dimensions: 25.4 x 12.7 x 8.75 mm

Environmental

Operating Temperature: -10°C to +75°C
Storage Temperature: -40°C to 90°C

This product is RoHs compliant.

Outline Drawing:

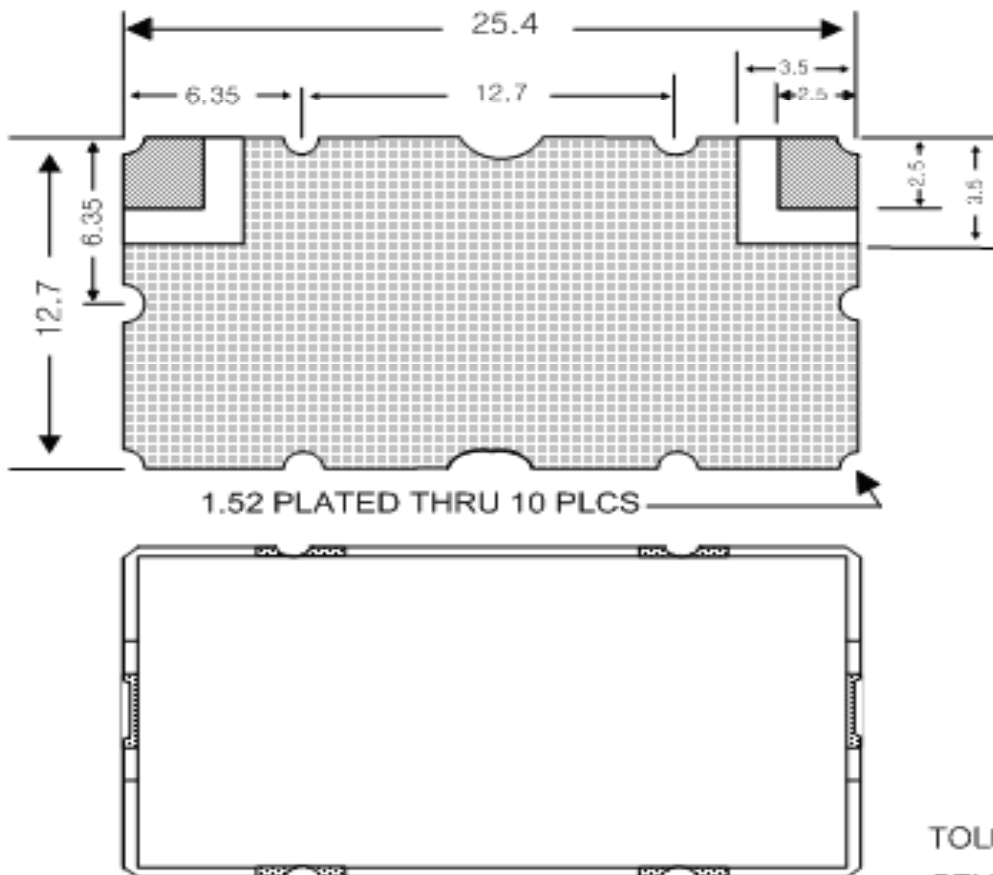

TOLERANCES UNLESS
OTHERWISE SPECIFIED : +/-0.3
UNIT: mm