



Electrical specifications

Center Frequency: 906 MHz
Bandwidth: Fo ± 19 MHz
VSWR in BW: 15 min
Input / Output Impedance: 50 Ohms
Passband: 896.5-915.5 MHz
Passband Insertion Loss: 3.2 dB max.
Passband Ripple: 1.0 dB max.
Rejection: 40 dB min.@ 957-995 MHz
Rejection 2: 10 dB min.@ 855-870 MHz
Rejection 3: 30 dB min.@ 817-855 MHz
Power Handling: 3 W

Mechanical


Mounting Method: SMT
Dimensions: 30mm x 16mm x 6mm

Environmental

Operating Temperature: -20°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

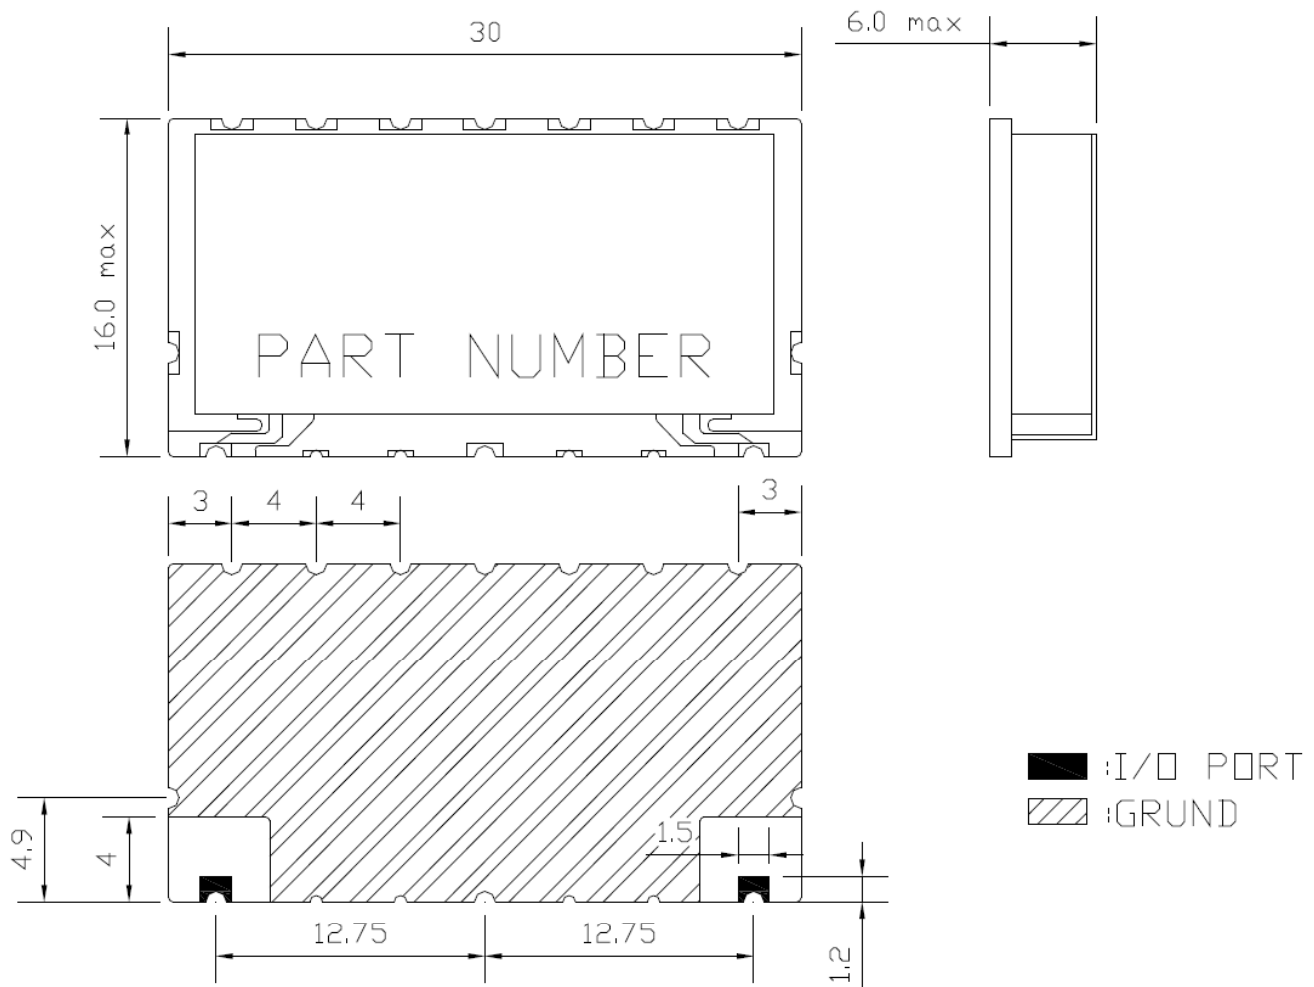



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

906 MHz Ceramic Bandpass Filter

Part Number: AM906B1118



Response Plot:

