

✓ 54LS/74LS273 011564

54LS/74LS273
8-BIT REGISTER
 (With Clear)


DESCRIPTION — The '273 is a high speed 8-bit register, consisting of eight D-type flip-flops with a common Clock and an asynchronous active LOW Master Reset. This device is supplied in a 20-pin package featuring 0.3 inch row spacing.

- EDGE-TRIGGERED
- 8-BIT HIGH SPEED REGISTER
- PARALLEL IN AND OUT
- COMMON CLOCK AND MASTER RESET


ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		V _{CC} = +5.0 V ±5%, T _A = 0°C to +70°C	V _{CC} = +5.0 V ±10%, T _A = -55°C to +125°C	
Plastic DIP (P)	A	74LS273PC		9Z
Ceramic DIP (D)	A	74LS273DC	54LS273DM	4E
Flatpak (F)	A	74LS273FC	54LS273FM	4F

CONNECTION DIAGRAM
PINOUT A



LOGIC SYMBOL




V_{CC} = Pin 20
 GND = Pin 10

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions



PIN NAMES	DESCRIPTION	54/74LS (U.L.) HIGH/LOW
CP	Clock Pulse Input (Active Rising Edge)	0.5/0.25
D ₀ — D ₇	Data Inputs	0.5/0.25
MR	Asynchronous Master Reset Input (Active LOW)	0.5/0.25
Q ₀ — Q ₇	Flip-flop Outputs	10/5.0 (2.5)

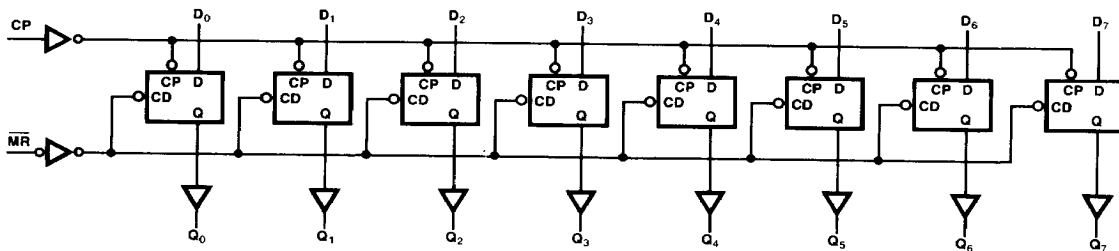LOGIC DIAGRAM



FUNCTIONAL DESCRIPTION — The '273 is an 8-bit parallel register with a common Clock and common Master Reset. When the \overline{MR} input is LOW, the Q outputs are LOW, independent of the other inputs. Information meeting the setup and hold time requirements of the D inputs is transferred to the Q outputs on the LOW-to-HIGH transition of the clock input.

TRUTH TABLE

INPUTS			OUTPUTS
MR	CP	D _n	Q _n
L	X	X	L
H		H	H
H		L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74LS		UNITS	CONDITIONS
		Min	Max		
I _{CC}	Power Supply Current	27		mA	V _{CC} = Max

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74LS		UNITS	CONDITIONS
		C _L = 15 pF			
		Min	Max		
f _{max}	Maximum Clock Frequency	30		MHz	Figs. 3-1, 3-8
t _{PLH} t _{PHL}	Propagation Delay CP to Q _n	24 24		ns	Figs. 3-1, 3-8
t _{PHL}	Propagation Delay \overline{MR} to Q _n	27		ns	Figs. 3-1, 3-16

AC OPERATING REQUIREMENTS: V_{CC} = +5.0 V, T_A = +25°C

SYMBOL	PARAMETER	54/74LS		UNITS	CONDITIONS
		Min	Max		
t _s (H) t _s (L)	Setup Time HIGH or LOW D _n to CP	15 15		ns	Fig. 3-6
t _h (H) t _h (L)	Hold Time HIGH or LOW D _n to CP	5.0 5.0		ns	
t _w (H) t _w (L)	CP Pulse Width HIGH or LOW	20 20		ns	Fig. 3-8
t _w (L)	\overline{MR} Pulse Width LOW	20		ns	Fig. 3-16
t _{rec}	Recovery Time MR to CP	15		ns	Fig. 3-16