
# series\_f, type\_s4




#### General information

Part number	S40F1C-P09MCC0-150S
Termination	solder
Size	0
Locking principle	push
Coding	1_halfshell
Cable Diameter	cable_mini_15
Cable outlet	bend_relief



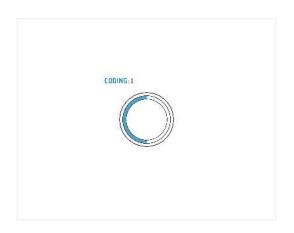

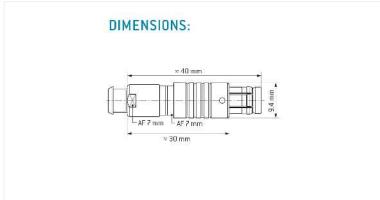

# Contact insert description

Number of contacts	9
Contact type	pins
Contact diameter	05mm
Insulator material	peek
Wire cross section	28_awg
Termination	solder
Termination diameter	04mm

reverse\_gender\_on\_request

### Technical information

Max. creepage and air clearance distance	06_mm	05_mm
Nominal current single contact	04 <u>.</u> a	iec_60512_5_2
Nominal current insert	2,6 A	vde_0298_4
Test voltage	06_kv_ac	sae_13441
safety_text		

## Mechanical and environmental data

Degree of protection*	ip68
Operating temperature	40_120_c
Mating cycles	5000

mated

# Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

\$40F1C-P09MCC0-150S series f, type s4 230731 1/2

safety\_text\_2 ul\_text illustrative\_text

\$40F1C-P09MCC0-150S series\_f, type\_s4 230731 2/2