

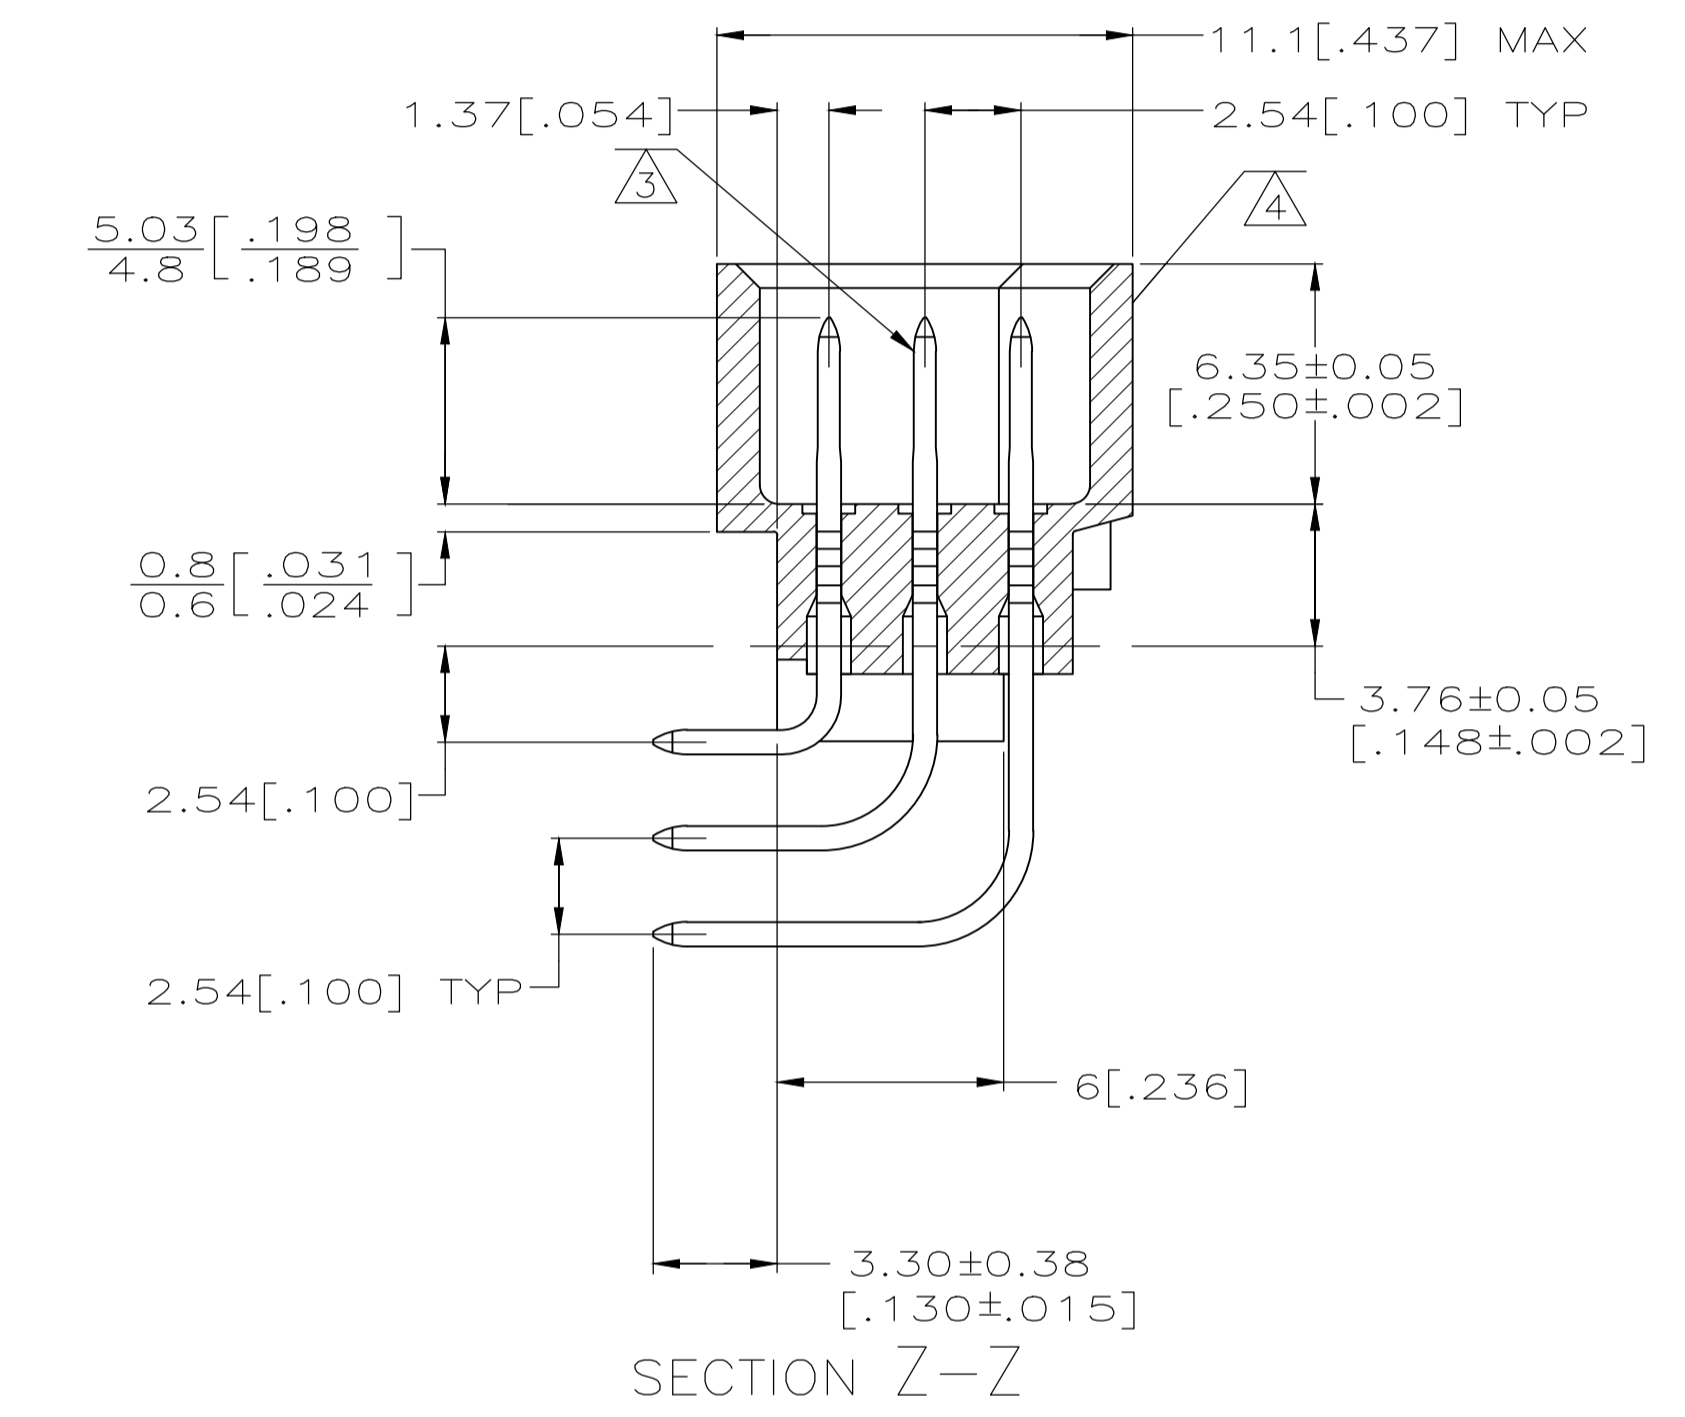
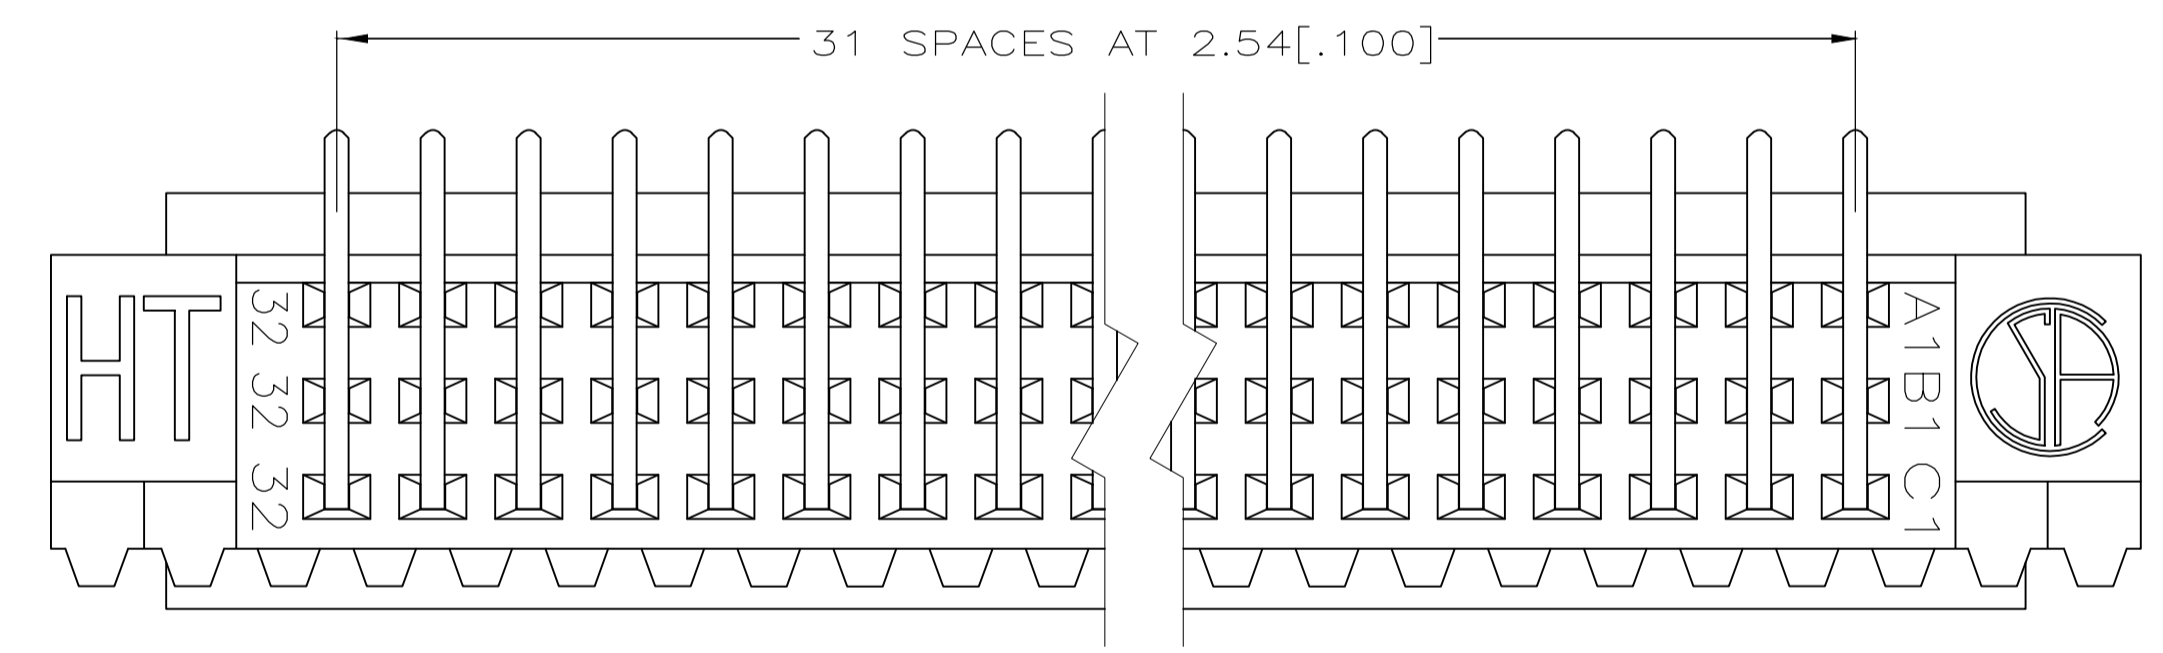
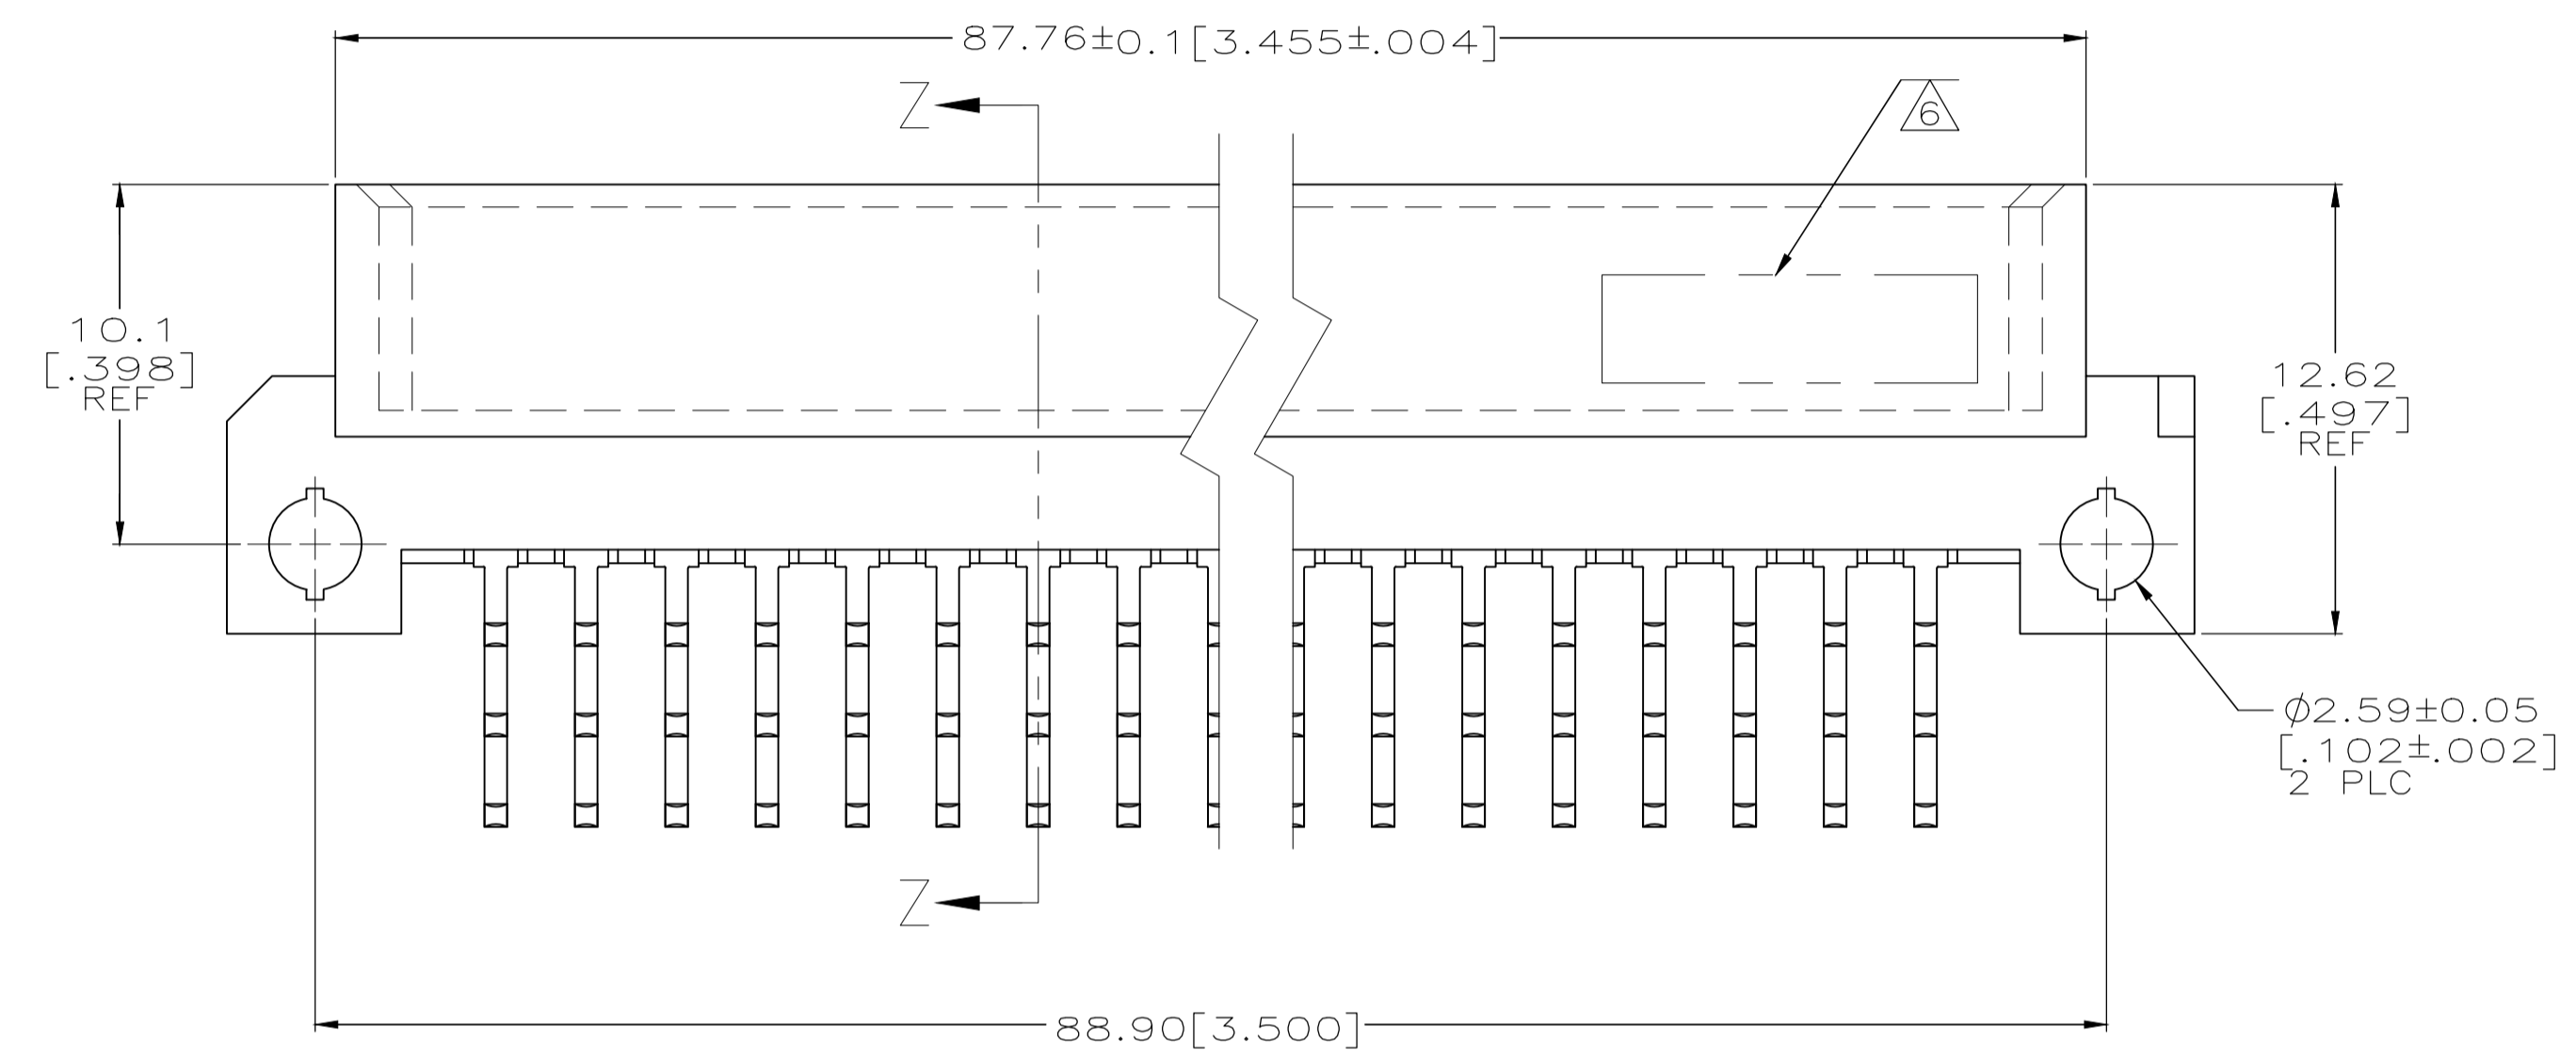


REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
A		REVISED PER ECO-19-003043	26FEB2019	SY HL

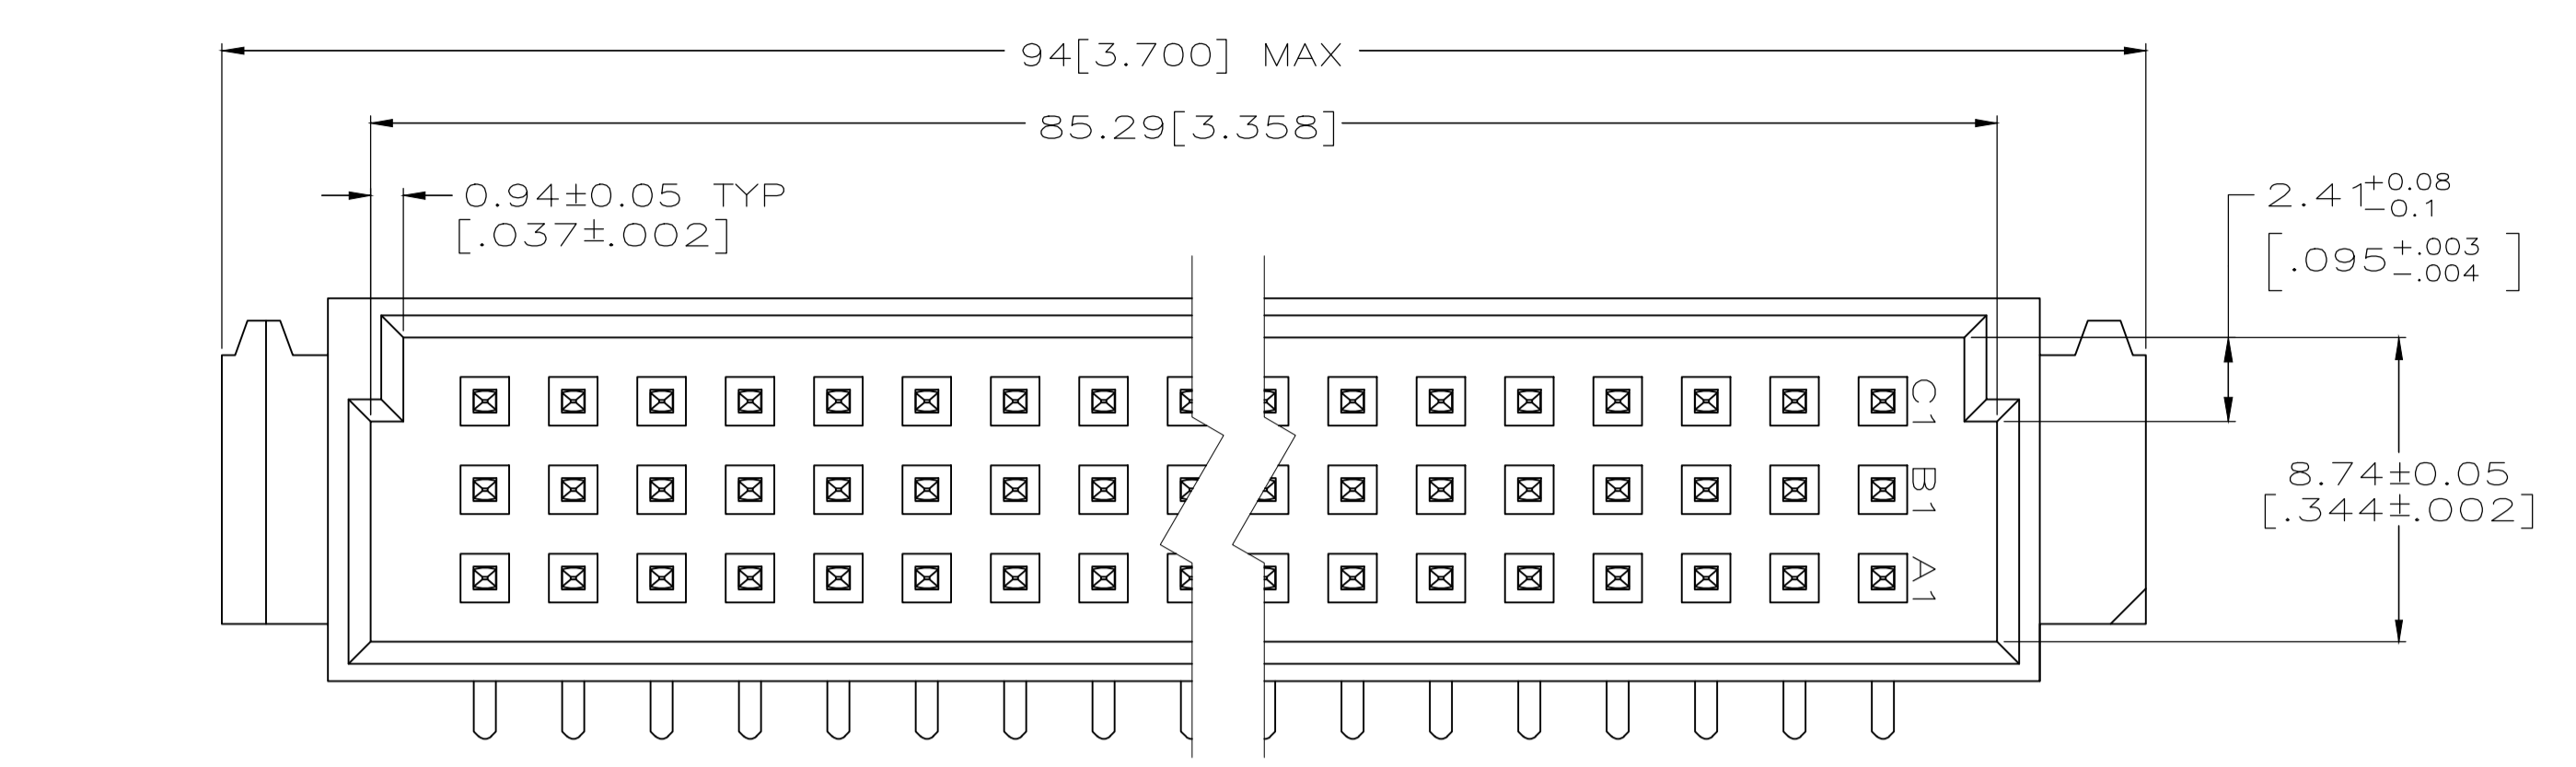

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- △ POST FINISH: 0.76µm MIN GOLD IN CONTACT AREA. TIN PLATE ON POSTS.

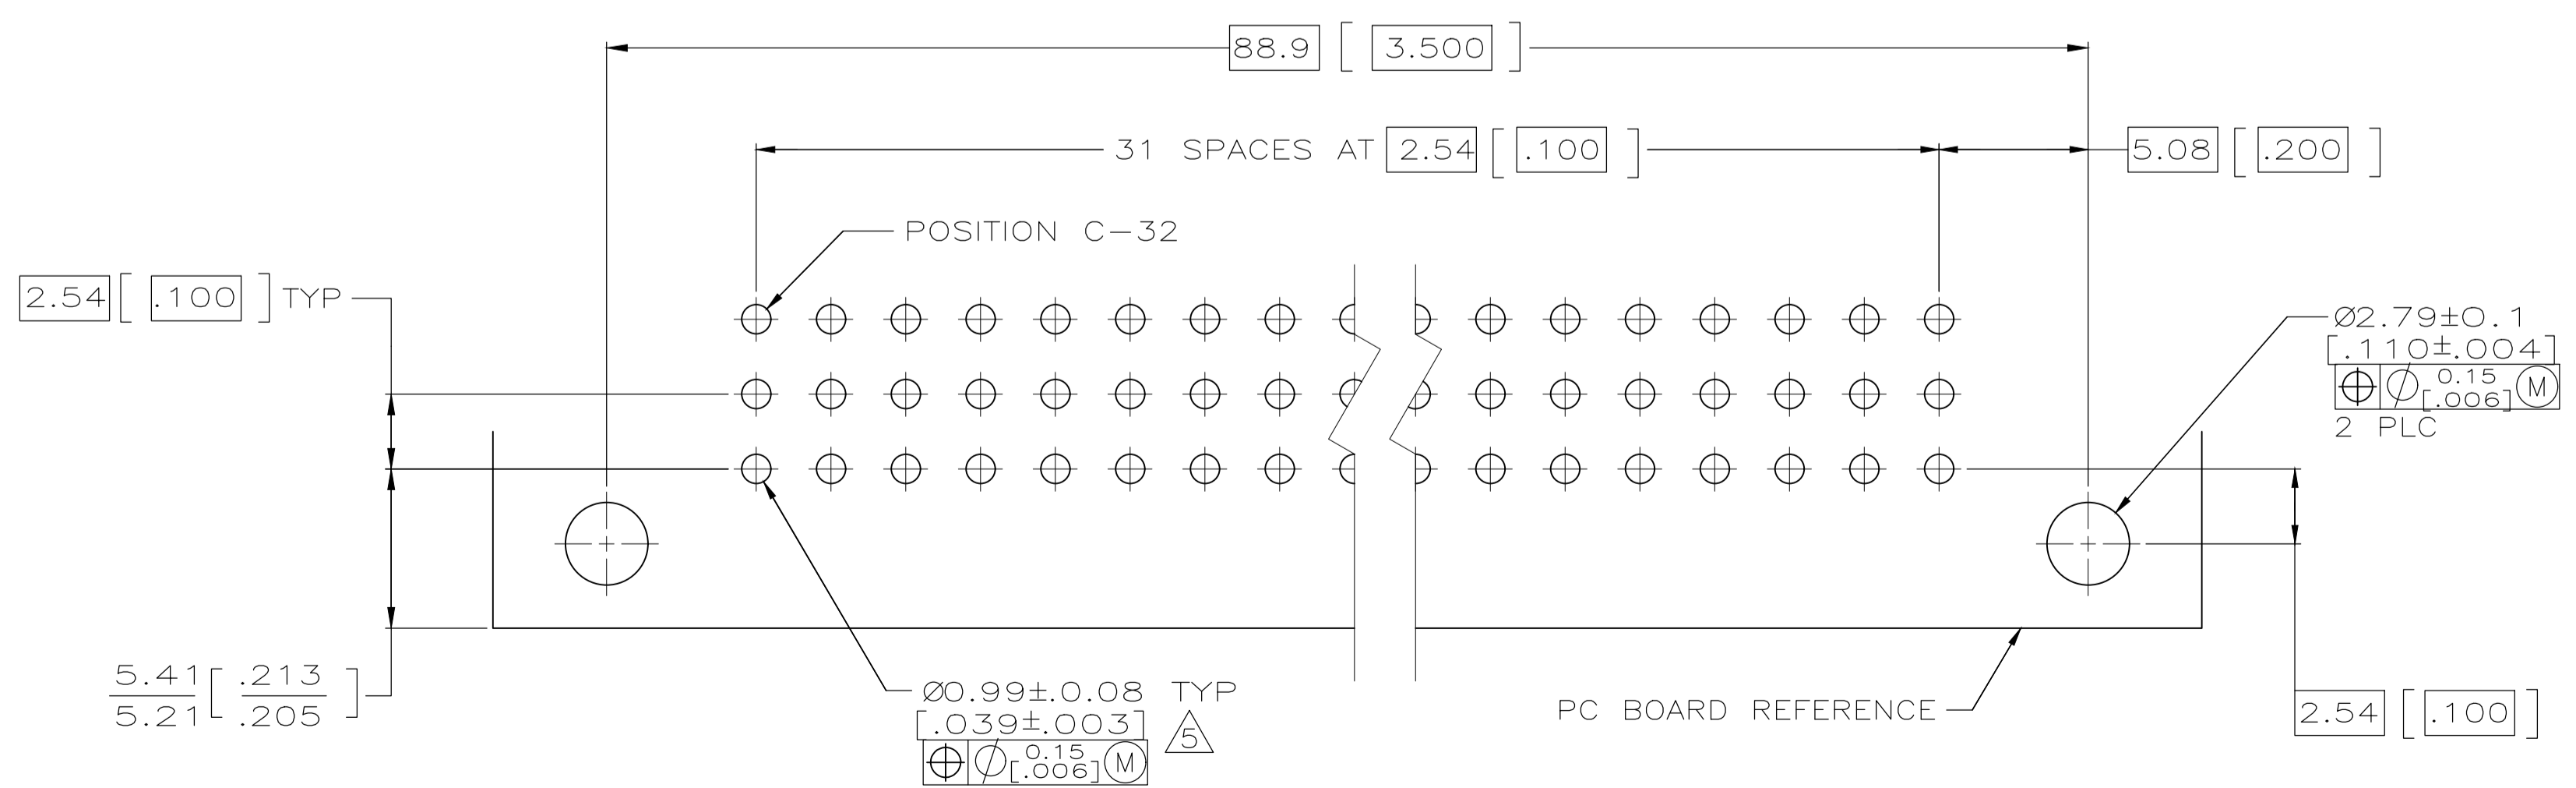

PC BOARD LAYOUT

FINISH	POSITIONS LOADED	ROWS LOADED	NO. OF LOADED POSITION	ASSY PART NUMBER
△ 1-32	X X X		96	5650947-4
△ 3 1-32	X X X		96	5650947-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	OSMAYOS	TE Connectivity ASSEMBLY, PIN, EUROCARD, TYPE C 96 POSITION, .130 SOLDER POST
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13[.005] 4 PLC ± - ANGLES ± -		CJK A. SHARPE OSMAYOS APVD A. SHARPE OSMAYOS PRODUCT SPEC APPLICATION SPEC	NAME SIZE CAGE CODE DRAWING NO WEIGHT 0.000000 A1 00779 C=5650947	