

| | | | |
|------|------|-------------|----------|
| SIGN | DATE | DESCRIPTION | APPROVER |
| | | | |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!


Material

- Insulator: Glass Filled Polyester
- Flammability: UL94V-0
- Color: Black

Ratings

- Operating Temperature: -40° - +105°
- RoHS Compliant

| Circuits | Dimension |
|----------|-------------|
| | A |
| 06 | 12.2(.480) |
| 08 | 14.7(.579) |
| 10 | 17.3(.681) |
| 12 | 19.8(.780) |
| 14 | 22.3(.878) |
| 16 | 24.9(.980) |
| 20 | 30.0(1.181) |
| 24 | 35.0(1.378) |
| 26 | 37.6(1.480) |
| 30 | 42.7(1.681) |
| 34 | 47.7(1.878) |
| 36 | 50.2(1.976) |
| 40 | 55.4(2.181) |
| 44 | 60.4(2.378) |
| 50 | 68.1(2.681) |
| 56 | 75.7(2.980) |
| 60 | 80.8(3.181) |
| 62 | 83.3(3.280) |
| 64 | 85.8(3.378) |

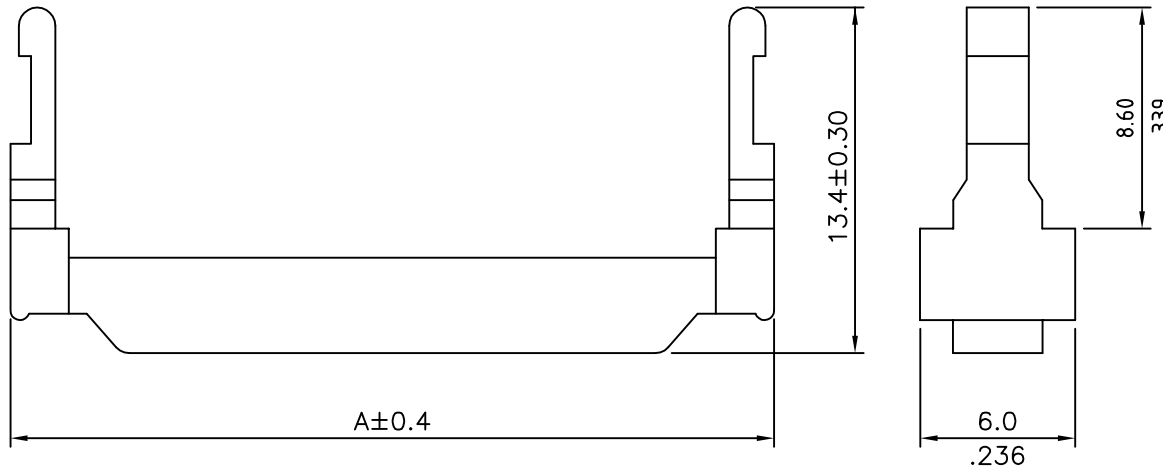

PART NUMBER:

101-XX-S

Number of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| | | | | | |
|----------------------|----------------------|--|----------------------|-----------------|-----------------|
| TITLE | | 101 Series Strain Relief - 2.54mm Dual Row IDC strain relief | | | |
| PART NO. | 101-XX-S | DWG NO. | 101-XX-S.DWG | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | 4050 | |
| Steven 2007.08.27 | Marvin 2007.08.27 | Marvin 2007.08.27 | Marvin 2007.08.27 | Tolerance | |
| | | | | UNIT: mm/inches | .X ±0.30/.012 |
| | | | | SCALE: NONE | .XXX ±0.20/.008 |
| SHEET: 01/01 | | | | REV.: A | X* ±1° |