

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

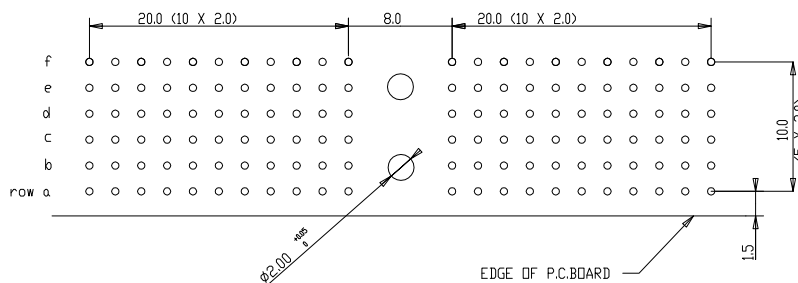

Material				Spec.ref				
Mat code				tolerance				
Heat treat				projection				
Plating/Finish				MM				
rev	ecn no	dr	date	Dr	27 08 96	W.Paris		
A	3505-0256	KN	14-9-01	Eng			Product family MILLIPACS	
B	3505-0256	Guo JM	03/08/05	Chr			Model Name HMR01PA5104----	
C	3507-0362	Kesson	05/09/07	Appr			ECN	
D	0501-0110	NZ	05/30/10				REL Level	
FCI				MPACS 5+2R RA RCP				Scale 5.000
				CONN TYPE A				Rev. D
05	BEC 9.2546	RN	11/06/10	Prv/E File	catalog no	HMR01PA5104----	BS,C,201444,018	
				CUSTOMER DRAWING				sheet 1 of 1

FCI is a registered trademark of FCI Corporation. All rights reserved. FCI Corporation, 10000 North Central Expressway, Dallas, TX 75243, USA. © 2011 FCI Corporation. All rights reserved.