




1	BLACK
2	GREEN/YELLOW
3	WHITE

WIRING DIAGRAM

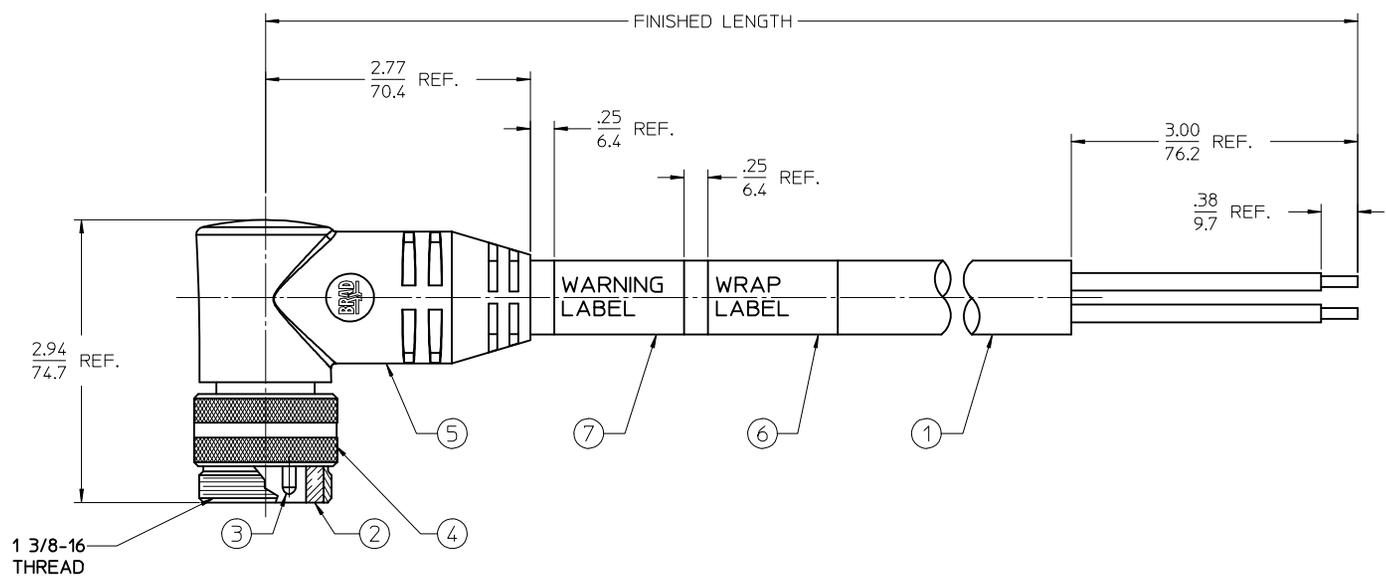

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 - 4) MATES WITH: QUICK CHANGE 3 POLE RECEPTACLE
 - 5) ELECTRICAL DATA:
 10AWG UL TYPE: TC-ER STRANDED CABLE
 MAX VOLTAGE: 600V
 MAX CURRENT: 32A
 PROTECTION IP67 (WHEN MATED)
 TEMPERATURE RANGE: -20°C TO 90°C
 - 6) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
 - 7) ASSEMBLY IS RoHS COMPLIANT

PART NUMBER LEGEND

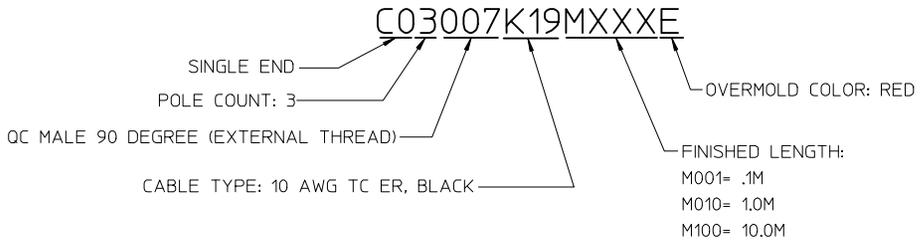

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
7	1	WARNING LABEL	VINYL	ORANGE/BLACK
6	1	WRAP LABEL	VINYL	BLACK/YELLOW
5	1	OVERMOLD	PVC	RED
4	1	COUPLING	ALUMINUM	CLEAR ANODIZE
3	3	CONTACT PIN	Cu ALLOY	GOLD PLATED
2	1	INSERT	PVC	BLACK
1	1	CABLE, 10/3 TC-ER (SEE NOTE 5)	TPE JACKET	BLACK

RELEASED EC NO: JGZ2016-0830 DRAWN BY: RSTONE CHKD: BWOODMAN APPR: BWOODMAN DATE: 2015/12/08 DATE: 2016/02/29	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	IN/MM	1:1	INCH	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY: RSTONE	DATE: 2015/12/08	TITLE: QUICK CHANGE CORD ASSY	
	▽=0	3 PLACES ± --- ± ---	CHECKED BY:	DATE:	MALE 90 DEG, RED	
		2 PLACES ± --- ± .01	APPROVED BY: BWOODMAN	DATE: 2016/02/29	10AWG TPE CABLE	
		1 PLACE ± 0.3 ± ---	MATERIAL NO.:		molex	
		0 PLACE ± --- ± ---	DOCUMENT NO.:		SD-130063-094	SHEET NO. 1 OF 1
		ANGULAR ± 1 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			