
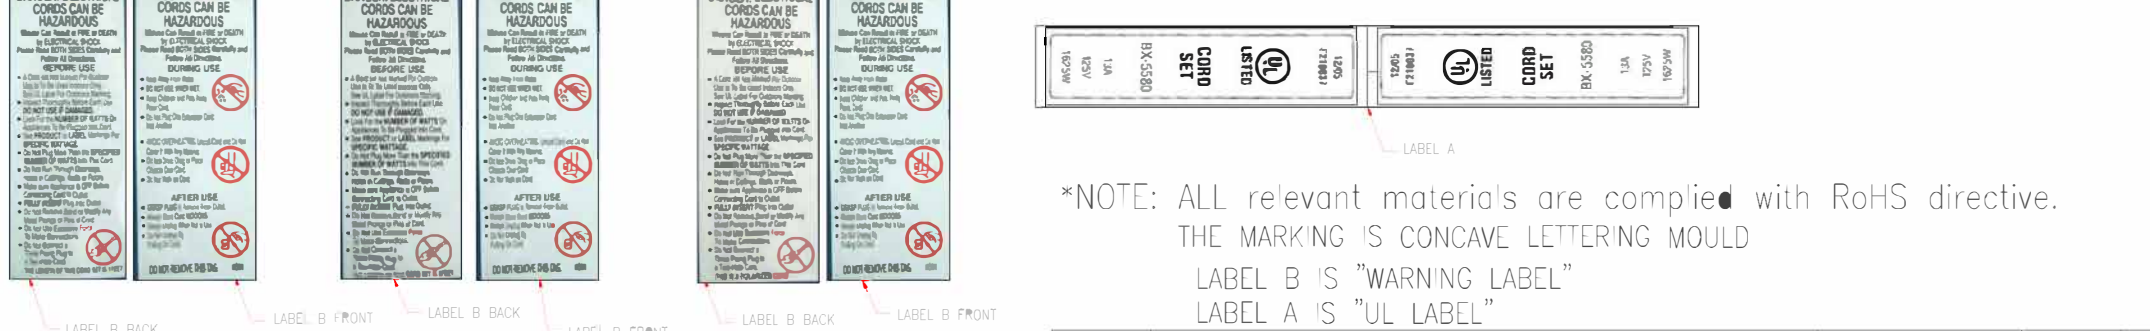


P1: M-003


P2: M-007

Customer No.: No.1

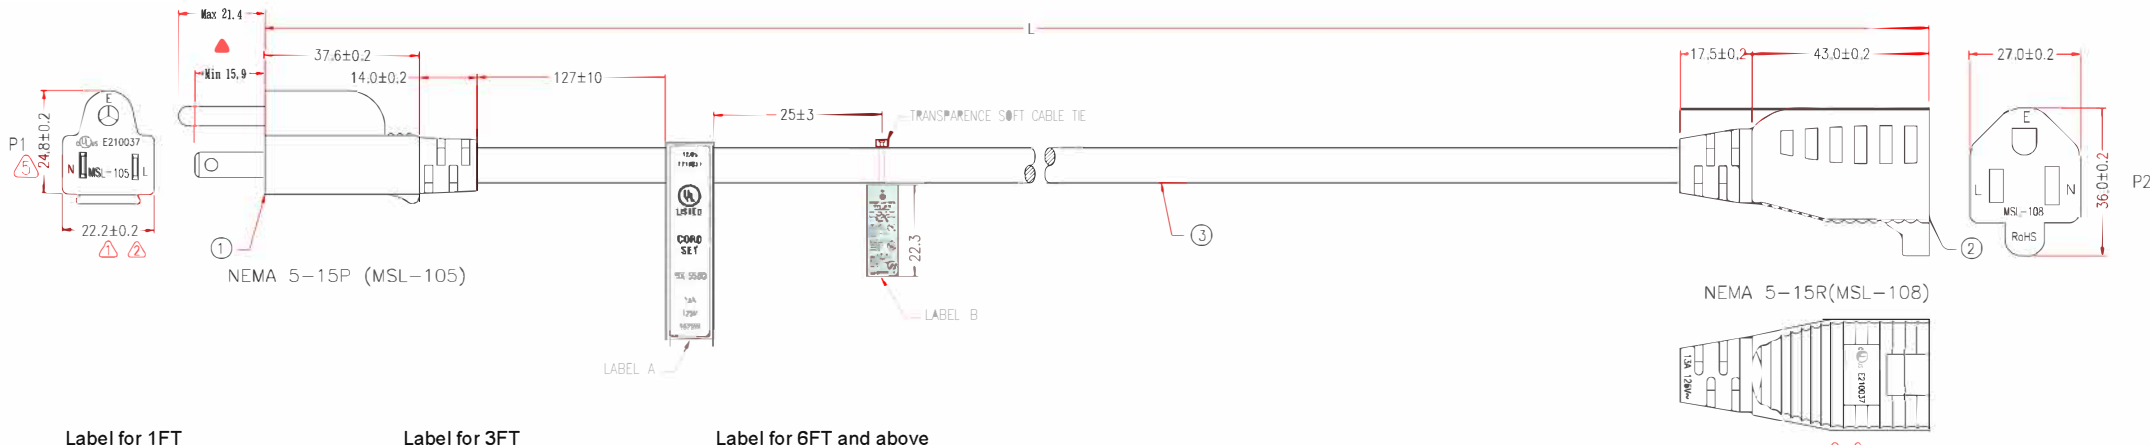

\*NOTE: ALL relevant materials are complied with RoHS directive.  
 THE MARKING IS CONCAVE LETTERING MOULD  
 LABEL B IS "WARNING LABEL"  
 LABEL A IS "UL LABEL"

MARKING: (UL) SJT 3/C 16AWG(1.31MM<sup>2</sup>) VW-1 75°C 300V E204978  
 CSA SJT 3/C 1.31MM<sup>2</sup>(16AWG) FT2 60°C 300V 204790 MSL

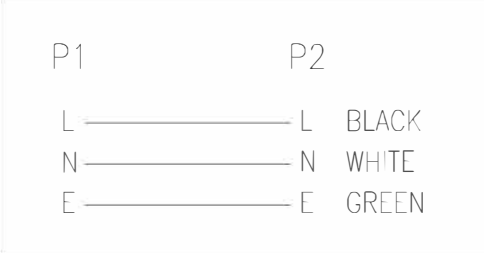

3	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-058	H5TC43-0304K09	L-30mm	M304	
2	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304	
	BRACKET: YS-016	A1QC15-0767	1	M767	
1	TERMINAL: 98575BS-0	A1QB09-0257	1	M257	
	TERMINAL: 98752BS-0	A1QB11-0257	2	M257	
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-002	A1QC07-0767	1	M767	
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257	
	TERMINAL: ø4.75mm, 98475BS-1	A1QB06-0257	1	M257	
No.	DESCRIPTION			Q'TY	Supplier

REV.5 2018.04.18	MODIFY P1 MOLDED SIZE	REV.4 2017.09.14	MODIFY LENGTH		Cable Length Unless Other Spec. Tolerances: 0-200mm ±10mm 201-1000mm ±20mm 1001-1500mm ±25mm 1501-2100mm ±30mm 2100mm ±40mm
REV.3 2017.07.21	MODIFY CABLE & MSL-108 TERMINAL	REV.2 2017.07.12	MODIFY MOLDED SIZE & MODIFY PLUG LOGO		
REV.1 2015.01.13	MODIFY MOLDED LOGO	NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm			UNIT: mm