

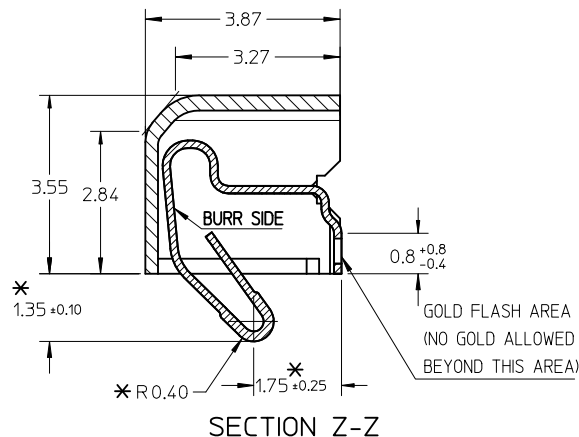
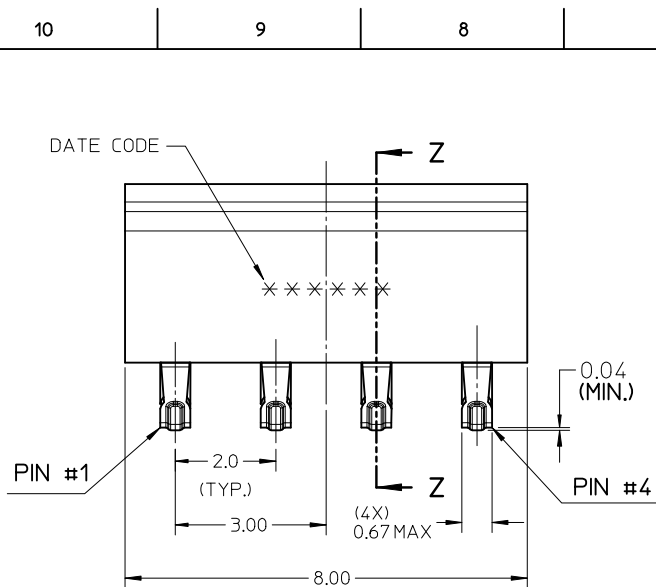
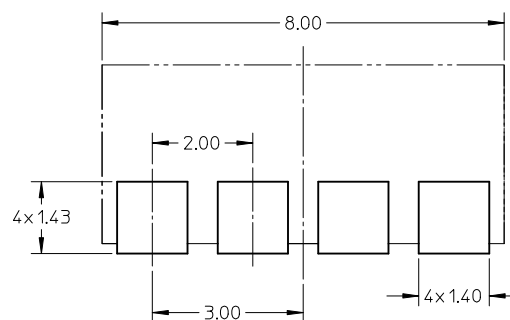


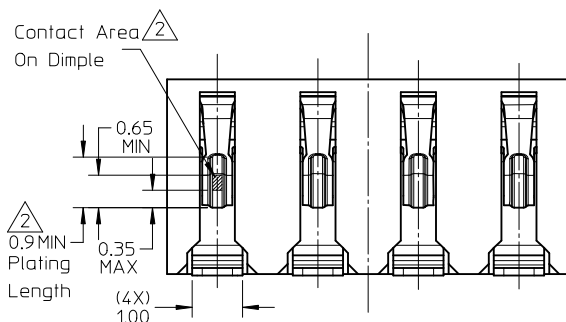

* DIMENSIONS WILL
BE REPORTED ON PIN#1
AND PIN#4 ONLY

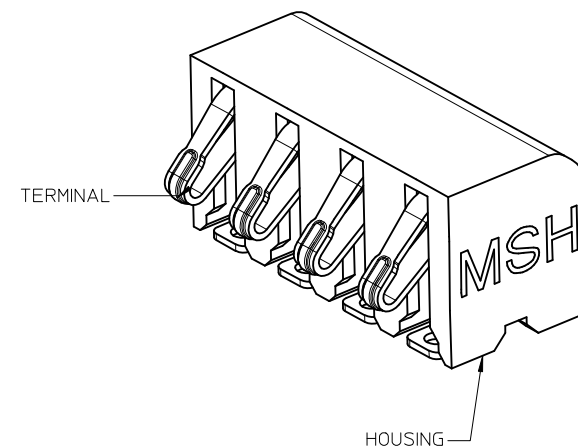

RECOMMENDED PCB LAYOUT
(DEFAULT TOLERANCE: ± 0.05)

NOTE:

1. MATERIAL:

HOUSING: LCP, 30% GLASS-FILLED, UL 94V-0, COLOR IS BLACK
TERMINAL: COPPER ALLOY, 0.15 MM BeCu C17200 290 TM06.

2. FINISH:

CONTACT AREA ON DIMPLE: 30 MICRO INCHES MIN GOLD PLATING OVER
50 MICRO INCHES MINI NICKEL,

GOLD FLASH ON PLATING LENGTH

SOLDER AREA: GOLD FLASH OVER 50 MICRO INCHES NICKEL

REST AREA: 50 MICRO INCHES MINI NICKEL


3. RECOMMENDED WORKING RANGE 1.05 ~ 0.55 MM.

4. COPLANARITY: 0.08 MAX AMONG THESE SOLDER TAILS.

5. PRODUCT SPECIFICATION: PS-47615-001.

6. DATE CODE: ** ** ** (6 DIGITS)

DAY
MONTH
YEAR

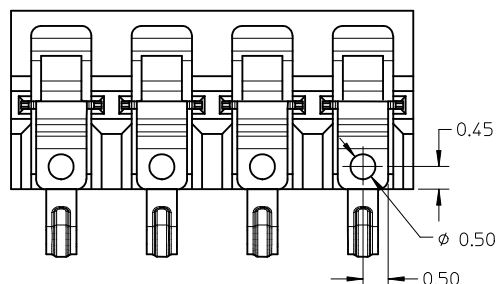

REVISED	EC NO: S2011-0795	2011/04/11 DRWNSHONG	2011/04/27 CHKD: LING	2011/04/27 APPR: NAGESHKN	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
										MM ONLY		10:1	METRIC		
										DRAWN BY	DATE	TITLE			
										CHECKED BY	DATE				
										XI XU	2007/5/17				
										APPROVED BY	DATE				
										HWANG	2007/5/17				
										MATERIAL NO.		DOCUMENT NO.			SHEET NO.
										476150001		SD-47615-001			1 OF 1
										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			