

-				
<u> </u>	<u>ر</u> ی	 	O	0



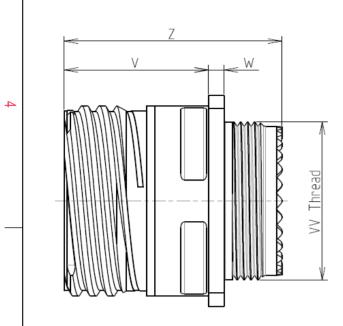



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 11.5 g ± 10%

8D 0

G

11

F

22

А

F

С

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

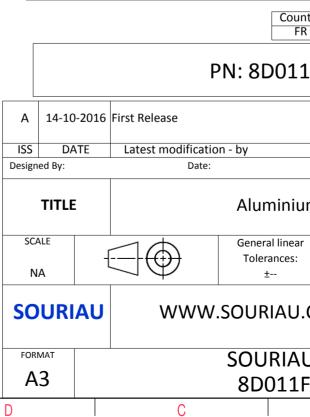

σ		А			
	·				
				4	
AS EXAMPLE				3	
	mply with by a third part otice.) liction & Cont				
1F22AC	Not Listed			2	
			I		
	CUSTOME	R DRAWING	MOD N°		
um Receptacle 8D series					
ar :		PROJECT		1	
I.COM	This document is the property of				
U DRG N° F22AC-C			SHEET		
.FZZAC-C B		Α	-, -	J	

		_					
		Contact Layout					Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
4	(00 0 ⁴					
		4#22D	1				
	Ctc A B	11-22 X Y 1.905 1.905 1.905 -1.905					ØT_
	С	-1.905 -1.905	-				Dim ØA
ω	D	-1.905 1.905]			<u> </u>	ØAA R1
							ØТ
	1						
						SOURIAU shall not l due to a use of t the Specifications issu (professional	he Products w
N							Coun FR
						PN	:8D011
						-10-2016 First Release	h
					ISS Designed B	DATE Latest modification - y: Date:	бу
					ווד	'LE	Aluminiu
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOU	RIAU WWW.SC	JURIAU.
					FORMAT A3		OURIAU 8D011F
	Н	G	F	E	D	С	

Т

ш

т

G

0

